

WARRANTY

Cub Cadet offers a three year domestic user warranty across the entire range of garden machinery. This is great news for both customers and dealers, inspiring confidence in the quality and reliability of Cub Cadet products. Details of terms and conditions can be found at www.cubcadet.co.uk.

3 year warranty for all garden machinery



Doc.No: 4987

Text and photographs, specifications of dimensions and performance are composed with greatest care. The correctness of the information cannot be guaranteed, nor that the products comply with the images regarding colour, form and equipment or that the products comply with the proportion of the images. The engine horsepower information provided by the engine manufacturer is to be used for comparison purposes only. Amendments due to misprints or errors are reserved. Please see the operator's manual and the warning labels posted on the vehicle itself for more details.

© 2022 Stanley Black & Decker Outdoor GmbH, Germany. All rights reserved. Cub Cadet and other trademarks are registered trademarks of Stanley Black & Decker. For more information, simply go to our website: www.cubcadet.co.uk



Cub Cadet Supported by Barrus
E. P. Barrus Ltd, Glen Way, Launton Road, Bicester, Oxfordshire. OX26 4UR
Tel: 01869 363658 Fax: 08714 290936 www.cubcadet.co.uk

BARRUS
The Power Behind The Brands

CATALOGUE 2024

Cub Cadet®

RIDE-ON MOWER RANGE



CATALOGUE
2024

MORE POWER TO YOU

We know what our customers expect from their gardening equipment; power, performance, endurance and durability. That's why we strive for every Cub Cadet product to be the best in class.

We continuously endeavour to further improve our product ranges, by incorporating new and proven technologies, implementing innovative engineering solutions and offering service solutions and accessory ranges that deliver true advantages.

With constantly higher quality standards and power, we ensure you get the ultimate user experience. Power you can rely on again and again.

"OUR CUSTOMERS GIVE US EXCELLENT FEEDBACK ON CUB CADET MACHINES. WE ARE TRULY PROUD TO HAVE BEEN A TRADING PARTNER OF THIS GREAT BRAND HERE IN THE SOUTH OF ENGLAND SINCE 1985."

STEVE CANN & JILL VICKERY
CUB CADET DEALER | GEORGE CANN GARDEN MACHINERY LTD. | BRAMDEAN | UNITED KINGDOM



CHAMPIONS – INSPIRED BY AMERICAN INGENUITY

Is it the power? The endurance? Or simply the fact, that you are ready for every challenge? There are many things that make Cub Cadet a true champion - and they all have one thing in common; a revolutionary garden tractor introduced to the US in the 1960s.

Back then a true milestone, and to this day a historic benchmark with regards to our standards and values; we continuously strive to exceed the high demands of our customers. With a mix of innovative engineering and user-friendly design, we want to inspire professionals, semi-professionals and ambitious outdoor enthusiasts alike. By creating innovative machines that are built for maximum efficiency, ease-of-use and maximum comfort.

That is what makes us proud - and turns you into a true champion.

Cub Cadet is also proud to be a long-standing sponsor of William Fox-Pitt MBE, one of the most successful three-day event riders ever, who uses the Cub Cadet range to keep his Dorset yard well groomed. Fox-Pitt has been world number one four times and is eleven-times British number one.

Cub Cadet



OUR HISTORY KEEPS US GOING

1961 1 st Cub Cadet garden tractor hits the market	1963 1 st shaft drive model	1980 1 st super garden tractor	1980 1 st twin cylinder engine	2007 Synchro-Steer® Technology debuts, an Industry first	2011 50th anniversary celebration with innovation	2014 Introduction of the innovative Boosted-Airflow-Technology	2017 Introduction of the PRO SERIES – zero-turns	2018 Introduction of the XR ENDURO SERIES robotic mowers	2020 Introduction of the XZ5 zero-turn series	2021 Introduction of the XR5 robotic mowers	2022 Introduction of the XZ6 zero-turn series	
1966 The world's 1 st garden tractor with hydrostatic transmission	1972 "Cadet" lawn tractor debuts	1985 Breaking new ground in cut quality	1994 1 st lawn tractor with shaft drive	2005 500 Series lawn tractors – Made in Germany	2009 Industry's tightest turning radius	2010 Most advanced residential zero-turn	2015 MySpeed – The innovative variable speed system	2017 Introduction of the XT ENDURO SERIES lawn tractors	2020 Introduction of LR2 E-rider and XT2 E-lawn tractor	2021 Introduction of the XZ7 zero-turn series	2021 Introduction of the PRO Z9 zero-turn	2023 Introduction of the XZ8

LR1
FORCE SERIES

COMPACT
AND VERSATILE
LIKE NEVER BEFORE

MINI-RIDERS

The Cub Cadet Mini-Riders deliver the same strength, durability and perfect cut as our larger lawn tractors, just in a more compact design. Plus, you have the choice between two models with transmatic and one model with hydrostatic drive or our full-electric model LR2 ES76. The Cub Cadet Mini-Riders are more than just compact, they are comfortable, convenient and unmatched in quality.

COMPACT AND VERSATILE LIKE NEVER BEFORE

Modern design, versatility and comfortable mowing – just three of the many reasons to choose a Cub Cadet LR1 Mini-Rider. The compact and manoeuvrable Mini-Riders with electric start are equipped with powerful and low-maintenance Cub Cadet engines.

Thanks to their space-saving design, these models are almost as compact as a conventional walk behind mower in terms of garage space.

The Mini-Riders also allow you the option to collect, discharge or mulch your grass clippings.

200 LITRE GRASS CATCHER
(Models LR1 MR76 and LR2 NR76)

4.9 LITRE
FUEL TANK

LARGE TYRES
Lawn-friendly, yet handy,
even on uneven terrain

CUTTING HEIGHT
ADJUSTMENT & PTO CLUTCH
Easily adjustable cutting height over 5 positions,
from 38 to 95 mm. Both levers are located
ergonomically on the right side of the seat

MODELS AVAILABLE



LR1 MR76

Cutting width:	76 cm / 30"
Mowing area:	2,500 m ² /h
Grass bag capacity:	Standard 200 l
Engine:	Cub Cadet OHV
Engine displacement:	382 cm ³
Drive:	Transmatic
Cutting height adjustment:	5 positions
Rear Tow Hitch	Optional extra 196-398-000



LR1 MS76

Cutting width:	76 cm / 30"
Mowing area:	3,000 m ² /h
Grass bag capacity:	Optional 115 l
Engine:	Cub Cadet OHV
Engine displacement:	382 cm ³
Drive:	Transmatic
Cutting height adjustment:	5 positions
Rear Tow Hitch	Optional extra 196-397-000

INTELLIGENT PARKING ASSISTANCE (ONLY LR2)
the IPA system helps park your MINI-RIDER in the garage
with ease. The intelligent system is designed to reduce the
speed of your MINI-RIDER while in reverse.

LED LIGHTS
(ONLY LR2 SERIES)

TRANSMATIC (LR1) OR
HYDROSTATIC (LR2)
TRANSMISSION

FRONT BUMPER

76 CM MOWING DECK

LR2 FORCE SERIES



KEY BENEFITS



MOW-IN-REVERSE

The Reverse Mowing Technology allows you to continue mowing while backing up your MINI-RIDER. As a safety precaution this function must be activated manually. Always make sure that no children or animals are near the mowing area.



HYDROSTATIC DRIVE SYSTEM

The LR2 comes complete with a top-quality hydrostatic drive system. With the parking brake on the left and a one-pedal foot control on the right.



LIGHTS

LED lights for safer operation at dawn.



SUPER GRIP PEDALS

Under challenging conditions, the super grip pedals provide maximum grip for safe driving.

MINI-RIDER ACCESSORIES



TWIN BAGGER

115 litres, for 76 cm decks

Part number:
19A30014OEM



REAR HITCH

Rear hitch for LR series with side discharge

Part number:
196-397-000

Rear hitch for LR series with rear discharge

Part number:
196-398-000



MULCH KIT/DEFLECTOR

Mulch Kit/Deflector incl. blades for 76 cm / 30" decks

Part number:
196-334-600

Mulch Kit/Deflector for 60cm / 24" decks

Part number:
196-707-678

3-in-1 OPTION

COLLECT, OPTIONAL DISCHARGE & MULCHING.

3-in-1 means that you have the choice between collecting the clippings, discharging them out the back, or mulching.

Mulching means that the grass is cut several times and then equally distributed onto the ground where it can be used as a natural fertiliser; good for the environment and good for your lawn.. Plus there is no collecting or grass disposal which saves you time.

The Side Discharge and Mulching Kits are available as optional extras.

MODEL AVAILABLE



LR2 NR76

Cutting width:	76 cm / 30"
Mowing area:	2,500 m ² /h
Grass bag capacity:	Standard 200 l
Engine:	Cub Cadet OHV
Engine displacement:	439 cm ³
Drive:	Hydrostatic
Cutting height adjustment:	5 positions
Rear Tow Hitch	Optional extra 196-398-000

THE SIZE YOU NEED WITH THE POWER YOU WANT

The Cub Cadet LR2 Mini-Rider delivers all the strength, durability and cutting performance of larger rider models; but in a more compact design.

Premium hydrostatic transmission and the exclusive IPA system gives you optimum control while in operation.

LR2
FORCE SERIES

MOWING WITH POWER WHILE RESPECTING THE ENVIRONMENT

Our MINI-RIDER LR2 ES76 uses strong electric motors and is powered by a 56V Li-ION battery. Its large cutting width of 76 cm combined with 60 minutes* of running time (per charge) make the cutting of large lawns easy. And it comes with a 3 year warranty on both the mower and the battery.



MOWING TIME 60 MIN*
4 HOURS CHARGING TIME



LR2 ES76	
Cutting width:	76 cm / 30"
Area performance (rec.):	3,000 m ² /h
Collecting volume:	Optional 115 l
Engine:	Cub Cadet 56 V / 30 Ah / 1,500 Wh
Drive:	Electric drive
Cutting height adjustment:	5 positions
Model no.:	33BA27JD603

*When fully charged. Deviations are possible depending on lawn and weather conditions, and grass thickness.

COMFORTABLE CUT & SEW SEAT WITH TOOL-LESS SEAT ADJUSTMENT

ZERO EMISSIONS DURING YOUR WORK

OPTIONAL 115 L GRASS CATCHER

BRIGHT LED HEADLIGHTS
High visibility even when working at dawn or dusk.

MAINTENANCE- AND SERVICE-FRIENDLY

VARIABLE SPEEDS WITH FOOT PEDAL CONTROL



FRONT BUMPER

RETURN-FUNCTION
At a battery level of 10 %, the cutting deck automatically switches off help saving power to return to the charging station.

MOW-IN-REVERSE
The Reverse Mowing Technology allows you to continue mowing while driving backwards (must be activated manually).

56V LI-ION POWER

LR1 MR76

LR1 MS76

ENGINE		
Engine type	Cub Cadet OHV	Cub Cadet OHV
Engine displacement	382 cm ³	382 cm ³
Rated power	7.4 kW / 2,700 min ⁻¹	7.9 kW / 2,900 min ⁻¹
Cylinders	Single	Single
Tank volume (capacity)	4.9 l	4.9 l
Lubrication	Fully pressurised automotive-style oil pump with spin-on oil filter	Fully pressurised automotive-style oil pump with spin-on oil filter
DRIVE SYSTEM		
Transmission	Transmatic	Transmatic
Speeds	6 (f/r), shift-on-the-go	6 (f/r), shift-on-the-go
Control	Foot pedal control with lever for manual pre-selection	Foot pedal control with lever for manual pre-selection
CUTTING SYSTEM		
Mowing area in m ² h	2,500	3,000
Cutting width	76 cm / 30"	76 cm / 30"
Cutting height (min-max)	38-95 mm	38-95 mm
Cutting options	3-in-1 option	3-in-1 option
Number of blades	1	1
Deck engagement	Manual lever control	Manual lever control
Deck height positions	5 positions	5 positions
Wash nozzle/Mulch Kit	Standard/Optional	Standard/Optional
DISCHARGE SYSTEM		
Type	Rear Discharge	Side Discharge
Bag (capacity)/accessory no.	Standard 200 l/-	Optional 115 l/(19A30014OEM)
Bag lever/Hardtop	2 grips/plastic	-/-
Bag fill indicator/grass deflector	Standard/Optional	-/Standard
FRAME		
Front axle	Steel	Steel
Front bumper	Standard	-
Turning circle	46 cm / 18"	46 cm / 18"
Wheel size (f/r in inch)	13 x 5 / 16 x 6.5	13 x 5 / 16 x 6.5
Wheel bearings	Sleeve bearings	Sleeve bearings
Frame	Easy entry frame	Easy entry frame
Tow hitch	Optional extra 196-398-000	Optional extra 196-397-000
ELECTRICAL		
Battery	12V, 135CCA, AGM	12V, 135CCA, AGM
Headlights	-	-
COMFORT		
Seat type	Comfort Seat	Comfort Seat
Seat adjustment	Tool-less	Tool-less
Steering wheel	Standard	Standard
Mow-in-reverse	Standard	Standard
Battery charger	(196-967-678)	(196-967-678)
DIMENSIONS		
Vibration value body/K-factor	1.0 / 0.5 m/s ²	1.0 / 0.5 m/s ²
Vibration value hand/arm / K-factor	5.0 / 1.5 m/s ²	5.0 / 1.5 m/s ²
Dimensions (L/W/H)	225 cm / 86 cm / 112 cm	157 cm / 85 cm / 112 cm
Net weight	144 kg	126 kg

LR2 NR76

LR2 ES76

ENGINE		
Engine type	Cub Cadet OHV	Cub Cadet 56 V / 30 Ah / 1,500 Wh
Engine displacement	439 cm ³	-
Rated power	8.1 kW / 2,700 min ⁻¹	2.94 kW / 2,083 min ⁻¹
Cylinders	Single	-
Tank volume (capacity)	4.9 l	-
Lubrication	Fully pressurised automotive-style oil pump with spin-on oil filter	-
DRIVE SYSTEM		
Transmission	Hydrostatic	Electric drive
Speeds	Infinitely variable	Variable
Control	Foot pedal control	Foot pedal control
CUTTING SYSTEM		
Mowing area in m ² h	2,500	3,000
Cutting width	76 cm / 30"	76 cm / 30"
Cutting height (min-max)	38-95 mm	38-95 mm
Cutting options	3-in-1 option	-
Number of blades	1	1
Deck engagement	Manual lever control	Electric PTO
Deck height positions	5 positions	5 positions
Wash nozzle/Mulch Kit	Standard/Optional	-/Optional
DISCHARGE SYSTEM		
Type	Rear Discharge	Side Discharge
Bag (capacity)/accessory no.	Standard 200 l/-	Optional 115 l/(19A30014OEM)
Bag lever/Hardtop	2 grips/Hardtop	-/-
Bag fill indicator/grass deflector	Standard/Optional	-/Standard
FRAME		
Front axle	Steel	Steel
Front bumper	Standard	Standard, blue
Turning circle	46 cm / 18"	46 cm / 18"
Wheel size (f/r in inch)	13 x 5 / 16 x 6.5	13 x 5 / 16 x 6.5
Wheel bearings	Sleeve bearings	Sleeve bearings
Frame	Easy entry frame	Easy entry frame
Tow hitch	Optional extra 196-398-000	Optional extra 196-397-000
ELECTRICAL		
Battery	12V, 135CCA, AGM	-
Headlights	LED	LED
COMFORT		
Seat type	High Back Comfort Seat	Cut & Sew high backrest
Seat adjustment	Tool-less	Tool-less
Steering wheel	Standard	Standard
Mow-in-reverse	Standard	Standard
Battery charger	(196-967-678)	-
DIMENSIONS		
Vibration value body/K-factor	1.0 / 0.5 m/s ²	1.0 / 0.5 m/s ²
Vibration value hand/arm / K-factor	5.0 / 1.5 m/s ²	5.0 / 1.5 m/s ²
Dimensions (L/W/H)	225 cm / 86 cm / 112 cm	170 cm / 85 cm / 112 cm
Net weight	172 kg	122 kg

LT

FORCE SERIES

XT

ENDURO SERIES™



**COMFORT
AND EFFICIENCY
PERFECTLY COMBINED**

LAWN TRACTORS

Cub Cadet lawn tractors deliver the perfect mowing experience, cut after cut, season after season.

Equipped with powerful engines and built on durable strong steel frames with hard-wearing components, Cub Cadet lawn tractors are made to work. Our line up of lawn tractors have been ergonomically designed for user comfort, honed to ensure incredibly responsive handling and made to deliver exceptional cut and collecting performance.

Power, strength, comfort and efficiency in every detail.

**LT LAWN TRACTORS,
A STEP UP IN POWER AND PERFORMANCE.**

With a lawn tractor from the FORCE SERIES, mowing lawns becomes an even more efficient and effective gardening experience. The decks on lawn tractors are typically six inches wider than those found on mini-riders and over 16" wider in comparison to a regular lawnmower. With a wider cutting deck and more powerful engines not only can you cut more, but you can mow at a speed which is 2 – 3 times faster, saving you time and effort.

Cub Cadet LT lawn tractors are extraordinarily versatile. They excel when it comes to covering large areas quickly thanks to the oversized grass bag. The side discharge eliminates the need to stop and empty the bag. Thanks to the user-friendly cutting height adjustment, the LT Series achieves optimum cutting results – even on difficult ground.

The LT lawn tractors deliver a perfect mowing performance, exceptional cutting and bagging with incredibly responsive handling.

A tow hitch is available as an optional extra for all LT tractors with rear discharge (Part number: 196-399-000)

DRIVE SYSTEMS

TRANSMATIC TRANSMISSION

Allows shift-on-the-go speed control. Simply choose the driving direction, set the desired basic speed with the speed shift lever on the dashboard and release the brake/clutch pedal. Push the pedal to slow down or press it all the way forward to stop. Releasing the brake pedal automatically brings the tractor back to your preset speed.



AUTOMATIC TRANSMISSION

For a smooth change in speed. Using the gear selector you simply choose forward or reverse and adjust the speed with the foot pedal.

HYDROSTATIC TRANSMISSION

Impressive with its modern technology and featuring a self-lubricating hydro pump for minimum maintenance and maximum durability. The hydrostatic transmission stands out for its velocity control as well as continual forward and reverse speeds. No clutching or shifting is required which means you can drive more gently with greater accuracy.



LT1

FORCE SERIES

KEY BENEFITS

COMFORTABLE SEAT WITH HIGH BACKREST FOR ALL LT MODELS

The high backrest supports an upright posture, making it far more comfortable.



CUTTING HEIGHT ADJUSTMENT

5-position height adjustment to easily change the cutting height (30–95 mm).

KEY BENEFITS



DIRECT COLLECT®

Our rear discharge tractors are designed to transport grass clippings into the grass bag with optimal efficiency. All LT Series rear discharge models feature a grass bag made of durable fabric for flexibility and have an air passage to guarantee air flow and perfect collection. The hard top controls dust and reduces noise.



PRECISE STEERING SYSTEM

All Cub Cadet lawn tractors help redefine your notion of comfort. We improved the steering of the lawn tractors. Our precision gear-steering technology supports operators at work and makes your powerful lawn tractor even more efficient and surprisingly easy to manoeuvre.



STEEL FRAME

All tractor frames are made of fully welded and powder-coated rugged steel, for added durability.



FLOATING STEEL OR CAST IRON FRONT AXLE

Keeping all four wheels on the ground, however uneven the surface.



ONE-PIECE BONNET

The entire engine bonnet can be removed within seconds without the need for tools, allowing for easy maintenance.



LT1 NR92

Cutting width:	92 cm / 36"
Area performance (rec.):	3,500 m ² /h
Collecting volume:	240 l
Engine:	Cub Cadet OHV
Engine displacement:	439 cm ³
Drive:	Transmatic
Cutting height adjustment:	5 positions



LT1 NS92

Cutting width:	92 cm / 36"
Area performance (rec.):	4,000 m ² /h
Collecting volume:	Optional 200 l
Engine:	Cub Cadet OHV
Engine displacement:	439 cm ³
Drive:	Transmatic
Cutting height adjustment:	5 positions

A tow hitch is available as an optional extra for all LT tractors with rear discharge (Part number: 196-399-000). Comes as standard on all side discharge LT models.

Our LT lawn tractors are equipped with powerful and reliable Cub Cadet engines developed in the USA with global parts.. Our LT3 models are equipped with twin cylinder engines.

LT2
FORCE SERIES
LT3
FORCE SERIES



SOFT GRIP STEERING WHEEL

MOW-IN-REVERSE
Reverse mowing technology. Allows you to cut while in reverse (LT2 and LT3 series).

COMFORTABLE SEAT WITH HIGH BACKREST

PIVOTING ONE-PIECE HOOD
The entire engine hood can be folded up within seconds without tools, for easy maintenance.

CUTTING HEIGHT ADJUSTMENT
5-position height adjustment to easily change the cutting height (30–95 mm).



TRANSMATIC, HYDROSTATIC OR AUTOMATIC DRIVE SYSTEM

STEEL FRAME

MODELS AVAILABLE



LT2 NR92

Cutting width:	92 cm / 36"
Mowing area:	3,500 m ² /h
Grass bag capacity:	240 l
Engine:	Cub Cadet OHV
Engine displacement:	439 cm ³
Drive:	Hydrostatic
Cutting height adjustment:	5 positions



LT2 NS92

Cutting width:	92 cm / 36"
Lawn area (rec.):	4,000 m ² /h
Collecting volume:	Optional 200 l
Engine:	Cub Cadet OHV
Engine displacement:	439 cm ³
Drive:	Automatic
Cutting height adjustment:	5 positions



LT3 PR105

Cutting width:	105 cm / 41"
Mowing area:	4,500 m ² /h
Grass bag capacity:	240 l
Engine:	Cub Cadet 679cm ³ V-TWIN
Engine displacement:	679 cm ³
Drive:	Hydrostatic
Cutting height adjustment:	5 positions



LT3 PS107

Cutting width:	107 cm / 42"
Mowing area:	5,500 m ² /h
Grass bag capacity:	Optional 200 l
Engine:	Cub Cadet 679cm ³ V-TWIN
Engine displacement:	679 cm ³
Drive:	Automatic
Cutting height adjustment:	5 positions

A tow hitch is available as an optional extra for all LT tractors with rear discharge (Part number: 196-399-000). Comes as standard on all side discharge LT models.

	LT1 NR92	LT1 NS92	LT2 NR92
ENGINE			
Engine type	Cub Cadet OHV	Cub Cadet OHV	Cub Cadet OHV
Engine displacement	439 cm ³	439 cm ³	439 cm ³
Rated power	8.1 kW / 2,700 min ⁻¹	7.5 kW / 2,450 min ⁻¹	8.1 kW / 2,700 min ⁻¹
Cylinders	Single	Single	Single
Tank volume (capacity)	3.8 l	3.8 l	3.8 l
DRIVE SYSTEM			
Transmission	Transmatic	Transmatic	Hydrostatic
Speeds	7 (f/r), shift-on-the-go	7 (f/r), shift-on-the-go	Variable (f/r)
Control	Foot pedal control with lever for manual pre-selection	Foot pedal control with lever for manual pre-selection	Foot pedal control
CUTTING SYSTEM			
Mowing area in m ² h	3,500	4,000	3,500
Cutting width	92 cm / 36"	92 cm / 36"	92 cm / 36"
Cutting height (min-max)	30–95 mm	30–95 mm	30–95 mm
Number of blades	2	2	2
Deck engagement	Manual lever control	Manual lever control	Manual lever control
Deck height positions	5 positions	5 positions	5 positions
Deck wheels	2	0	2
Wash nozzle/Mulch Kit	–/(196-749A678) Optional	–/Spring-loaded	–/(196-749A678) Optional
DISCHARGE SYSTEM			
Type	Rear discharge	Side discharge	Rear discharge
Bag (capacity)/accessory no.	240 l/–	Optional 200l/optional(OEM-190-180A)	240 l/–
Bag lever/hardtop	Telescopic handle/PVC Hardtop	–/–	Telescopic handle/PVC hardtop
Bag fill indicator/grass deflector	–/(196-750A678) Optional	–/Standard	–/(196-750A678) Optional
FRAME			
Front axle	Steel	Steel	Steel
Front bumper	(OEM-190-679) Optional	(OEM-190-679) Optional	(OEM-190-679) Optional
Turning circle	46 cm / 18"	46 cm / 18"	46 cm / 18"
Wheel size (f/r in inch)	15 x 6 / 18 x 9.5	15 x 6 / 20 x 8	15 x 6 / 18 x 9.5
Wheel bearings	Sleeve bearings	Sleeve bearings	Sleeve bearings
Frame	Easy entry frame	Easy entry frame	Easy entry frame
ELECTRIC			
Headlights	Standard	Standard	Standard
COMFORT			
Seat type	High Back Comfort Seat	High Back Comfort Seat	High Back Comfort Seat
Seat adjustment	Tool-less	Tool-less	Tool-less
Steering wheel	Standard	Standard	Soft-Grip
Toolbox/Cupholder	–/–	–/–	–/–
Mow-in-reverse	–	–	Standard
Battery charger	(196-967-678) Optional	(196-967-678) Optional	(196-967-678) Optional
DIMENSIONS			
Vibration value body/K-factor	1.0 / 0.5 m/s ²	1.0 / 0.5 m/s ²	1.0 / 0.5 m/s ²
Vibration value hand/arm / K-factor	5.0 / 1.5 m/s ²	5.0 / 1.5 m/s ²	5.0 / 1.5 m/s ²
Dimensions (L/W/H)	225 cm / 99 cm / 103 cm	170 cm / 99 cm / 100 cm	225 cm / 99 cm / 103 cm
Net weight	195 kg	150 kg	195 kg

A tow hitch is available as an optional extra for all LT tractors with rear discharge (Part number: 196-399-000). Comes as standard on all side discharge LT models.

	LT2 NS92	LT3 PR105	LT3 PS107
ENGINE			
Engine type	Cub Cadet OHV	Cub Cadet OHV	Cub Cadet OHV
Engine displacement	439 cm ³	679 cm ³	679 cm ³
Rated power	7.5 kW / 2,450 min ⁻¹	12.7 kW / 2,700 min ⁻¹	11.4 kW / 2,400 min ⁻¹
Cylinders	Single	V-TWIN dual cylinder	V-TWIN dual cylinder
Tank volume (capacity)	3.8 l	3.8 l	3.8 l
DRIVE SYSTEM			
Transmission	Automatic	Hydrostatic	Automatic
Speeds	Variable (f/r)	Variable (f/r)	Variable (f/r)
Control	Selector with foot pedal control	Foot pedal control	Selector with foot pedal control
CUTTING SYSTEM			
Mowing area in m ² h	4,000 m ² h	4,500	5,500
Cutting width	92 cm / 36"	105 cm / 41"	107 cm / 42"
Cutting height (min-max)	30–95 mm	30–95 mm	30–95 mm
Number of blades	2	2	2
Deck engagement	Manual lever control	Manual lever control	Manual lever control
Deck height positions	5 positions	5 positions	5 positions
Deck wheels	0	2	2
Wash nozzle/Mulch Kit	–/Spring-loaded	Standard/(196-749A678) Optional	Standard/(196-749A678) Optional
DISCHARGE SYSTEM			
Type	Side discharge	Rear discharge	Side discharge
Bag (capacity)/accessory no.	Optional 200 l/optional (OEM-190-180A)	240 l/–	Optional 200 l/(OEM-190-180A)
Bag lever/hardtop	–/–	Telescopic handle/PVC hardtop	–/–
Bag fill indicator/grass deflector	–/Standard	–/(196-750A678) Optional	–/Standard
FRAME			
Front axle	Steel	Heavy-duty cast-iron	Heavy-duty cast-iron
Front bumper	(OEM-190-679) Optional	Standard	Standard
Turning circle	46 cm / 18"	46 cm / 18"	46 cm / 18"
Wheel size (f/r in inch)	15 x 6 / 20 x 8	15 x 6 / 18 x 9.5	15 x 6 / 20 x 8
Wheel bearings	Sleeve bearings	Sleeve bearings	Sleeve bearings
Frame	Easy entry frame	Easy entry frame	Easy entry frame
ELECTRIC			
Headlights	Standard	Standard	Standard
COMFORT			
Seat type	High Back Comfort Seat	High Back Comfort Seat	High Back Comfort Seat
Seat adjustment	Tool-less	Tool-less	Tool-less
Steering wheel	Soft-Grip	Soft-Grip	Soft-Grip
Toolbox/Cupholder	–/–	–/–	–/–
Mow-in-reverse	Standard	Standard	Standard
Battery charger	(196-967-678) Optional	(196-967-678) Optional	(196-967-678) Optional
DIMENSIONS			
Vibration value body/K-factor	1.0 / 0.5 m/s ²	1.0 / 0.5 m/s ²	1.0 / 0.5 m/s ²
Vibration value hand/arm / K-factor	5.0 / 1.5 m/s ²	5.0 / 1.5 m/s ²	5.0 / 1.5 m/s ²
Dimensions (L/W/H)	170 cm / 99 cm / 100 cm	225 cm / 110 cm / 103 cm	170 cm / 110 cm / 100 cm
Net weight	150 kg	198 kg	175 kg

A tow hitch is available as an optional extra for all LT tractors with rear discharge (Part number: 196-399-000). Comes as standard on all side discharge LT models.

**STRONG,
POWERFUL
AND AGILE.**



Powerful performance, agility and market leading innovations make the XT ENDURO SERIES the best lawn tractors Cub Cadet has ever built. Cub Cadet has seen over a million XT Enduro series lawn tractors come off the US production line in Martin, Tennessee, showing just how popular these machines are with expert gardeners worldwide.

Designed for the expert gardener the XT ENDURO SERIES boasts the tightest turning circle on the market, especially useful if your lawn has obstacles such as trees and shaped beds.

The power and performance of the XT ENDURO SERIES will allow you to finish your work faster and with better results - meeting and exceeding your high expectations.

**OUR TOP 5
LEADING FEATURES**

1.

**CUTTING, COLLECTING AND
MULCHING 3-IN-1 SYSTEM**

3-in-1 option means that you have the choice between collecting the clippings, or discharging them out the back. You also have the option to buy an additional mulch kit as an accessory.



**JUST 17 CM
TURNING RADIUS**

Unbeatable efficiency even in confined spaces thanks to our innovative TIGHT TURN XTREME technology available on all XT2 and XT3 models.

2.

3.

**ULTRA-STURDY,
CORROSION-RESISTANT FRAME**

Ultra-rigid frame for top durability.



**PERFECTLY MATCHED
TRANSMISSION AND
ENGINE POWER**


Optimal drive system and the most powerful engine in its class.

4.

5.

**ULTRA-RELIABLE
V-BELT DESIGN**

Improved V-belt design reduces belt tension ensuring longer belt life and impressive stability. The XT2 QS117 tractor is also equipped with a welded fabricated mowing deck.

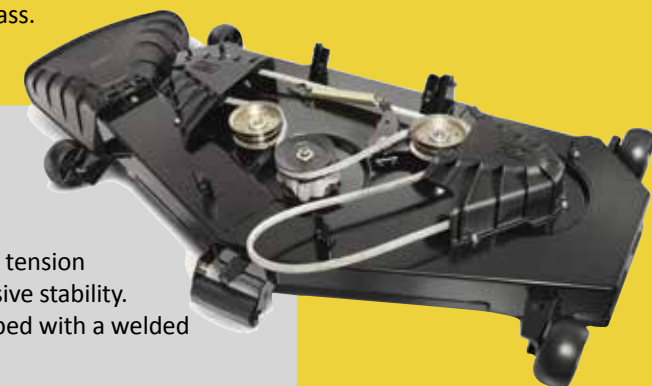

XT LAWN TRACTORS

DECADES OF ENGINE DEVELOPMENT EXPERTISE

MORE THAN 10 MILLION CUB CADET ENGINES IN USE WORLDWIDE

Cub Cadet has been designing and manufacturing its own engines for decades, with more than ten million units delivered worldwide. Specifically designed for our products, Cub Cadet engines deliver perfect results every time. Because of its global expertise and competitive products, Cub Cadet became the fastest-growing riding mower brand in the U.S..

MORE GREAT FEATURES THAT MAKE YOUR MOWING EASIER

XT LAWN TRACTORS



GRASS BAG WITH ELECTRONIC EMPTYING
At the touch of a button, the grass bag lifts up and tips the cuttings out. Effortless, even when the bag is full. Universal optional accessory for all XT models retrofittable from 2018.



DIAGONAL ADJUSTABLE SEAT
The seat can be adjusted to suit you and provide pure comfort whilst you mow.



POWERFUL BATTERY
High-quality wet batteries tailored to the engine allow a smooth starting process without the filling of acid.



MEMORY CURSOR
A cutting height memory cursor which displays your most frequently used and/or favorite cutting heights.



POWERFUL KAWASAKI V-TWIN ENGINE
A two-cylinder engine for challenging terrain. Ultra-smooth running with low fuel consumption.

XT MODELS WITH KAWASAKI V-TWIN ENGINES:
XT2 PR95, XT2 QR106, XT2 PS107, XT2 QS117, XT3 QS127

WHICH XT ENDURO TO CHOOSE?

XT1
ENDURO SERIES

XT2
ENDURO SERIES

XT3
ENDURO SERIES



CUTTING, COLLECTING AND MULCHING SYSTEM

- All-new grass collecting system and rear-discharge mowing decks.
- With twice the grass-catching of previous Cub Cadet lawn tractors.

320 LITRE BAG CAPACITY

360 LITRE BAG CAPACITY

HYDROSTATIC V-BELT

HYDROSTATIC POWER TRANSMISSION




Smooth drive system – simply put your foot on the pedal and go

POWERFUL CUB CADET ENGINE
reliable and high performance engine
(XT1 OS96, XT1 OS107, XT1 OR95,
XT1 OR106)

EFFICIENT CUB CADET V-TWIN ENGINE
2-cylinder engine
(XT2 PS117)

KAWASAKI V-TWIN ENGINE
(XT2 PR95, XT2 QR106, XT2 PS107,
XT2 QS117)

KAWASAKI V-TWIN ENGINE
2-cylinder engine for difficult terrain,
ultra-smooth running
and low fuel consumption.
(XT3 QS127)

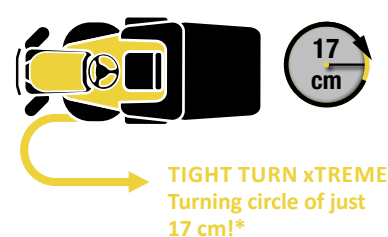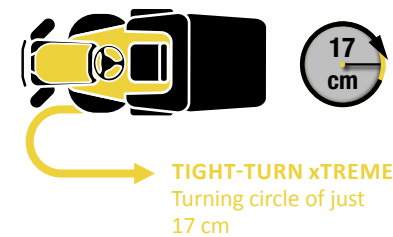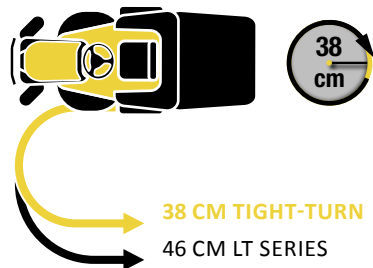

KEY START

SOLID, WELDED MOWING DECK for XT2 QS117

ANTI-DUST GRASS BAG SYSTEM
AVAILABLE AS AN OPTIONAL EXTRA

ANTI-DUST SYSTEM
Rear discharge with multi-layer dust
apron included in accessories. The apron
protects against flying grass and dirt.

*The turning circle of a lawn tractor involves marking the position of the left rear wheel while the tractor completes a 360-degree circle (on plain ground). Now you measure the distance between the mark and the actual position of the left rear wheel again. Half this distance is the turning circle – included in all product specifications.

NEW

DEWALT

The DEWALT Branded DXTB0573 combi cart is an easy to use alternative to a standard wheelbarrow. If it becomes too heavy to push, simply convert it from a wheelbarrow to a tow-behind cart and let your garden tractor take the strain.

With a carrying capacity of 363kg / 800lb / 10cu.ft, the cart will help you easily transport plants, soil, sand, gravel and much more around your property.

Mounted on a welded undercarriage with square frame tubing, the polypropylene bed is capable of hauling heavy loads time and time again. Pneumatic tyres and a 12" ground clearance provide easy manoeuvrability over rough terrain.

An easy to use foot pedal latch system with a 52 degree tipping angle and 110 degree swivel angle means you can dump the load exactly where it is needed.



DEWALT DXTB0573 COMBI CART

Propulsion:	Push/towed
Capacity:	363kg / 800lb / 10cu.ft
Construction:	Welded metal undercarriage with square frame tubing polypropylene bed
Bed Size:	L: 45" x W: 33" x H: 11"
Tipping:	Yes
Tipping Mechanism:	Foot pedal latch system
Dump Angle:	52°
Swivel Angle:	110°
Tyres:	16" x 5" pneumatic turf tread
Tow Hitch:	Folding for wheelbarrow use
Assembled Dimensions:	L: 66" x W: 33" x H: 26.5"
Ground clearance:	12"
Weight:	25.0kg

XT1™ ENDURO SERIES™



KEY BENEFITS



DIAGONAL ADJUSTABLE SEAT
Individually adaptable – pure comfort for all users.



PUSH BUTTON BLADE START
Activate the cutting blades safely and more efficiently.



MECHANICALLY SUPPORTED CUTTING HEIGHT ADJUSTMENT
Quickly and easily select the perfect setting.



HYDROSTATIC DRIVE SYSTEM
Smooth drive system for precise mowing – simply put your foot on the pedal and go.



MODELS AVAILABLE



XT1 OS96

Cutting width:	96 cm / 38"
Mowing area:	6,000 m ² /h
Grass bag capacity:	Optional 200 l
Engine:	Cub Cadet
Engine displacement:	547 cm ³
Drive:	Hydrostatic
Cutting height adjustment:	12 positions



XT1 OS107

Cutting width:	107 cm / 42"
Mowing area:	8,000 m ² /h
Grass bag capacity:	Optional 200 l
Engine:	Cub Cadet
Engine displacement:	547 cm ³
Drive:	Hydrostatic
Cutting height adjustment:	12 positions



XT1 OR95

Cutting width:	95 cm / 38"
Mowing area:	5,500 m ² /h
Grass bag capacity:	320 l
Engine:	Cub Cadet
Engine displacement:	547 cm ³
Drive:	Hydrostatic
Cutting height adjustment:	12 positions



XT1 OR106

Cutting width:	106 cm / 42"
Mowing area:	7,500 m ² /h
Grass bag capacity:	320 l
Engine:	Cub Cadet
Engine displacement:	547 cm ³
Drive:	Hydrostatic
Cutting height adjustment:	12 positions

UNBELIEVABLE POWER & EFFICIENCY

The Cub Cadet XT1 lawn tractors are ideally equipped for mowing, collecting and transporting clippings and can be expanded with a range of accessories.



KEY BENEFITS



DIAGONAL ADJUSTABLE SEAT
Individually adaptable – pure comfort for all users.



MECHANICALLY SUPPORTED CUTTING HEIGHT ADJUSTMENT
Quickly and easily select the perfect setting.



PUSH BUTTON BLADE START
Activate the cutting blades safely and more efficiently.



HYDROSTATIC DRIVE SYSTEM
Smooth drive system for precise mowing – simply put your foot on the pedal and go.

MODELS AVAILABLE

3-in-1 OPTION Powered by **Kawasaki**



XT2 PR95

Cutting width:	95 cm / 38"
Mowing area:	6,000 m ² /h
Grass bag capacity:	320 l
Engine:	Kawasaki, V-TWIN dual cylinder
Engine displacement:	603 cm ³
Drive:	Hydrostatic
Cutting height adjustment:	12 positions

3-in-1 OPTION Powered by **Kawasaki**



XT2 QR106

Cutting width:	106 cm / 42"
Mowing area:	8,000 m ² /h
Grass bag capacity:	320 l
Engine:	Kawasaki, V-TWIN dual cylinder
Engine displacement:	726 cm ³
Drive:	Hydrostatic
Cutting height adjustment:	12 positions

3-in-1 OPTION Powered by **Kawasaki**



XT2 PS107

Cutting width:	107 cm / 42"
Mowing area:	8,500 m ² /h
Grass bag capacity:	200 l optional
Engine:	Kawasaki, V-TWIN dual cylinder
Engine displacement:	603 cm ³
Drive:	Hydrostatic
Cutting height adjustment:	12 positions

3-in-1 OPTION POWERED BY **Cub Cadet**



XT2 PS117

Cutting width:	117 cm / 46"
Mowing area:	9,000 m ² /h
Grass bag capacity:	200 l optional
Engine:	Cub Cadet V-Twin dual cylinder
Engine displacement:	679 cm ³
Drive:	Hydrostatic
Cutting height adjustment:	12 positions

Powered by **Kawasaki**



XT2 QS117

Cutting width:	117 cm / 46" welded mowing deck
Lawn area (rec.):	9,000 m ² /h
Collecting volume:	200 l optional
Engine:	Kawasaki, V-TWIN dual cylinder
Engine displacement:	726 cm ³
Drive:	Hydrostatic
Cutting height adjustment:	12 positions

POWER FOR GREATER CHALLENGES

The Cub Cadet XT2 offers you an even higher level of power, control functions and durability. Tight Turn Xtreme makes them ideal for working on tough terrain, transporting and using additional accessories, whatever the season. At just 17 cm turning circle the XT2 series have the tightest turning radius on the market. Innovative tight turn technology delivers unsurpassed capability in tight places.

XT2®
ENDURO SERIES®



LI-ION-POWER

Modern battery technology helps provide a long service life as well as speedy charging cycles – once hooked up to an outlet, the battery is fully recharged within 4 hours.

ZERO-EMISSIONS. SUPERIOR CUT. POWERFUL PERFORMANCE

We have taken the XT Series flagship tractor with its proven strength and performance and combined it with a powerful and convenient lithium-ion battery to create a machine with no power fade and reduced noise for an enjoyable mowing experience; while delivering a superior cut with no compromise on performance. With a running time of approx. 90 minutes, depending on lawn and soil conditions and a cutting width of 107cm / 42", even large lawns can be cut quickly and efficiently. Good for you. Good for the environment.

MOWING TIME 90 MIN*
4 HOURS CHARGING TIME



XT2 ES107	
Cutting width:	107 cm / 42"
Area performance (rec.):	8,000 m ² /h
Collecting volume:	Optional 200 l
Engine:	Cub Cadet 56 V / 60 Ah / 3,000 Wh
Drive:	Electric drive
Cutting height adjustment:	12 positions

*Deviations are possible depending on lawn area

www.cubcadet.co.uk

ELECTRIC
LITHIUM ION



XT3™
ENDURO SERIES™



Cub Cadet
TIGHT TURN
xTREME

Just 17 cm turning circle thanks to TIGHT TURN xTREME.



MAXIMUM STRENGTH AND POWER FOR THE TOUGHEST TASKS

Designed to meet the toughest and most demanding conditions, driven by true power packages and equipped with ultra-strong components – the Cub Cadet XT3 QS127 is the ultimate lawn tractor. Brimming with power, capable of mowing dense grass and transporting larger loads including a mechanical differential lock that provides optimum traction however tough the terrain.

KEY BENEFITS



HYDROSTATIC POWER TRANSMISSION



STRONG V-TWIN KAWASAKI ENGINE
Two-cylinder engine for demanding terrain with particularly quiet running and low fuel consumption.

MODELS AVAILABLE



Powered by **Kawasaki**



Powered by **Kawasaki**

HIGH TRACTION EVEN ON CHALLENGING TERRAIN

XT3 QR106

Cutting width:	106 cm / 42"
Mowing area:	8,000 m ² /h
Grass bag capacity:	360l and Anti-Dust-System
Engine:	Kawasaki, V-TWIN dual cylinder
Engine displacement:	726 cm ³
Drive:	Hydrostatic, All-Ground Traction System
Cutting height adjustment:	12 positions

XT3 QS127

Cutting width:	127 cm / 50"
Mowing area:	10,000 m ² /h
Grass bag capacity:	Optional 210 l
Engine:	Kawasaki, V-TWIN dual cylinder
Engine displacement:	726 cm ³
Drive:	Hydrostatic with differential lock
Cutting height adjustment:	12 positions

Kawasaki is a registered trademark of Kawasaki Heavy Industries, Ltd.

	XT1 OS96	XT1 OS107	XT1 OR95
ENGINE			
Engine type	Cub Cadet	Cub Cadet	Cub Cadet
Engine displacement	547 cm ³	547 cm ³	547 cm ³
Rated power	9.0 kW / 2,300 min ⁻¹	6.6 kW / 2,250 min ⁻¹	6.2 kW / 2,100 min ⁻¹
Cylinders	Single	Single	Single
Tank volume (capacity)	11.4 l	11.4 l	11.4 l
DRIVE SYSTEM			
Transmission	Hydrostatic	Hydrostatic	Hydrostatic
Speeds	Stepless (f/r)	Stepless (f/r)	Infinitely variable
Control	Foot pedal control	Foot pedal control	Foot pedal control
Cruise control	Standard	Standard	Standard
CUTTING SYSTEM			
Mowing area in m ² h	6,000	8,000	5,500
Cutting width	96 cm / 38"	107 cm / 42"	95 cm / 38"
Cutting height (min-max)	25–100 mm	25–100 mm	25–100 mm
Cutting deck	Stamped	Stamped	Stamped
Number of blades	2	2	2
Deck engagement	Electric PTO	Electric PTO	Electric PTO
Deck height positions	12 positions	12 positions	12 positions
Deck wheels	2 balls deck wheels	2 balls deck wheels	2 balls deck wheels
Wash nozzle/Mulch Kit/mulching blades	–/Standard/Standard	Standard/Standard/ Standard	Standard/(196-551-000)/(196-561-000)
DISCHARGE SYSTEM			
Bag (capacity)/accessory no.	Optional 200 l/(OEMR190-180A)	Optional 200 l/(19A30030100)	320 l/ (196-555-603 Anti-Dust-System)
Bag lever/hardtop	–/–	–/–	Rounded ergo telescopic handle/Plastic
Bag fill indicator/grass deflector	–/Standard	–/Standard	With Blade Shutoff/(196-552A000)
FRAME			
Front axle	Heavy-duty cast-iron	Heavy-duty cast-iron	Heavy-duty cast-iron
Front bumper	Standard	Standard	Standard
Turning circle	TIGHT TURN 38 cm	TIGHT TURN 38 cm	TIGHT TURN 38 cm
Wheel size (f/r in inch)	15 x 6 / 20 x 8	15 x 6 / 20 x 8	15 x 6 / 18 x 8.5
Wheel bearings	Sleeve bearings	Sleeve bearings	Sleeve bearings
Frame	Robotically-welded	Robotically-welded	Robotically-welded
ELECTRIC			
Headlights	LED	LED	LED
COMFORT			
Seat type	Cut & Sew, high back rest	Cut & Sew, high back rest	Cut & Sew, high back rest
Seat adjustment	Lever, angled, 10 slide	Lever, angled, 10 slide	Lever, angled, 10 slide
Steering wheel	Ergonomic with gentle touch	Ergonomic with gentle touch	Ergonomic with gentle touch
Toolbox/Cupholder	Standard/Standard	Standard/Standard	Standard/Standard
Mow-in-reverse	Standard	Standard	Standard
DIMENSIONS			
Vibration value body/K-factor	1.0 / 0.5 m/s ²	1.0 / 0.5 m/s ²	1.0 / 0.5 m/s ²
Vibration value hand/arm / K-factor	5.0 / 1.5 m/s ²	5.0 / 1.5 m/s ²	5.0 / 1.5 m/s ²
Dimensions (L/W/H)	175 cm / 131 cm / 110 cm	175 cm / 134 cm / 110 cm	245 cm / 100 cm / 118 cm
Net weight	195 kg	195 kg	215 kg










	XT1 OR106	XT2 PR95	XT2 QR106
ENGINE			
Engine type	Cub Cadet	Kawasaki	Kawasaki
Engine displacement	547 cm ³	603 cm ³	726 cm ³
Rated power	6.6 kW / 2,250 min ⁻¹	9.3 kW / 2,150 min ⁻¹	11.8 kW / 2,200 min ⁻¹
Cylinders	Single	V-TWIN dual cylinder	V-TWIN dual cylinder
Tank volume (capacity)	11.4 l	11.4 l	11.4 l
DRIVE SYSTEM			
Transmission	Hydrostatic	Hydrostatic	Hydrostatic
Speeds	Infinitely variable	Infinitely variable	Infinitely variable
Control	Foot pedal control	Foot pedal control	Foot pedal control
Cruise control	Standard	Standard	Standard
CUTTING SYSTEM			
Mowing area in m ² h	7,500	6,000	8,000
Cutting width	106 cm / 42"	95 cm / 38"	106 cm / 42"
Cutting height (min-max)	25–100 mm	25–100 mm	25–100 mm
Cutting deck	Stamped	Stamped	Stamped
Number of blades	2	2	2
Deck engagement	Electric PTO	Electric PTO	Electric PTO
Deck height positions	12 positions	12 positions	12 positions
Deck wheels	4 balls deck wheels	2 balls deck wheels	4 balls deck wheels
Wash nozzle/Mulch Kit/mulching blades	Standard/(196-550-000)/(196-560-000)	Standard/(196-551-000)/(196-561-000)	Standard/(196-550-000)/(196-560-000)
DISCHARGE SYSTEM			
Bag (capacity)/accessory no.	320 l/ (196-555-603 Anti-Dust-System)	320 l/ (196-555-603 Anti-Dust-System)	320 l/ (196-555-603 Anti-Dust-System)
Bag lever/hardtop	Rounded ergo telescopic handle/Plastic	Rounded ergo telescopic handle/Plastic	Rounded ergo telescopic handle/Plastic
Bag fill indicator/grass deflector	With Blade Shutoff/(196-552A000)	With Blade Shutoff/(196-552A000)	With Blade Shutoff/(196-552A000)
FRAME			
Front axle	Heavy-duty cast-iron	Heavy-duty cast-iron	Heavy-duty cast-iron
Front bumper	Standard	Standard, yellow	Standard, yellow
Turning circle	TIGHT TURN 38 cm	TIGHT TURN xTREME 17 cm	TIGHT TURN xTREME 17 cm
Wheel size (f/r in inch)	15 x 6 / 18 x 9.5	15 x 6 / 18 x 9.5	15 x 6 / 18 x 9.5
Wheel bearings	Sleeve bearings	Sleeve bearings	Sleeve bearings
Frame	Robotically-welded	Robotically-welded	Robotically-welded
ELECTRIC			
Headlights	LED	LED	LED
COMFORT			
Seat type	Cut & Sew, high back rest	Cut & Sew, high back rest	Cut & Sew, high back rest
Seat adjustment	Lever, angled, 10 slide	Lever, angled, 10 slide	Lever, angled, 10 slide
Steering wheel	Ergonomic with gentle touch	Ergonomic with gentle touch	Ergonomic with gentle touch
Toolbox/Cupholder	Standard/Standard	Standard/Standard	Standard/Standard
Mow-in-reverse	Standard	Standard	Standard
DIMENSIONS			
Vibration value body/K-factor	1.0 / 0.5 m/s ²	1.0 / 0.5 m/s ²	1.0 / 0.5 m/s ²
K-factor	5.0 / 1.5 m/s ²	5.0 / 1.5 m/s ²	5.0 / 1.5 m/s ²
Dimensions (L/W/H)	245 cm / 110 cm / 118 cm	250 cm / 100 cm / 118 cm	250 cm / 110 cm / 118 cm
Net weight	258 kg	215 kg	268 kg







	XT2 PS107	XT2 PS117	XT2 QS117
ENGINE			
Engine type	Kawasaki	Cub Cadet	Kawasaki
Engine displacement	603 cm ³	679 cm ³	726 cm ³
Rated power	9.8 kW / 2,300 min ⁻¹	11.9 kW / 2,500 min ⁻¹	13 kW / 2,500 min ⁻¹
Cylinders	V-TWIN dual cylinder	V-TWIN dual cylinder	V-TWIN dual cylinder
Tank volume (capacity)	11.4 l	11.4 l	11.4 l
DRIVE SYSTEM			
Transmission	Hydrostatic	Hydrostatic	Hydrostatic
Speeds	Infinitely variable	Infinitely variable	Infinitely variable
Control	Foot pedal control	Foot pedal control	Foot pedal control
Cruise control	Standard	Standard	Standard
CUTTING SYSTEM			
Mowing area in m ² h	8,500	9,000	9,000
Cutting width	107 cm / 42"	117 cm / 46"	117 cm / 46"
Cutting height (min-max)	25–100 mm	25–100 mm	25–100 mm
Cutting deck	Stamped	Stamped	Welded mowing deck
Number of blades	2	2	2
Deck engagement	Electric PTO	Electric PTO	Electric PTO
Deck height positions	12 positions	12 positions	12 positions
Deck wheels	2 balls deck wheels	4 balls deck wheels	4 balls deck wheels
Wash nozzle/Mulch Kit/mulching blades	Standard/Standard/Standard	Standard/Standard/Standard	Standard/Standard/Standard
DISCHARGE SYSTEM			
Bag (capacity)/accessory no.	Optional 200 l/(19A30030100)	Optional 200 l/(19A30030100)	Optional 200 l/(19A30030100)
Bag lever/hardtop	–/–	–/Standard	–/Standard
Bag fill indicator/grass deflector	–/Standard	–/Standard	–/Standard
FRAME			
Front axle	Heavy-duty cast-iron	Heavy-duty cast-iron	Heavy-duty cast-iron
Front bumper	Standard, yellow	Standard, yellow	Standard, yellow
Turning circle	TIGHT TURN xTREME 17 cm	TIGHT TURN xTREME 17 cm	TIGHT TURN xTREME 17 cm
Wheel size (f/r in inch)	15 x 6 / 20 x 8	15 x 6 / 20 x 8	15 x 6 / 20 x 8
Wheel bearings	Sleeve bearings	Sleeve bearings	Sleeve bearings
Frame	Robotically-welded	Robotically-welded	Robotically-welded
ELECTRIC			
Headlights	LED	LED	LED
COMFORT			
Seat type	Cut & Sew, high back rest	Cut & Sew, high back rest	Cut & Sew, high back rest
Seat adjustment	Lever, angled, 10 slide	Lever, angled, 10 slide	Lever, angled, 10 slide
Steering wheel	Ergonomic with gentle touch	Ergonomic with gentle touch	Ergonomic with gentle touch
Toolbox/Cupholder	Standard/Standard	Standard/Standard	Standard/Standard
Mow-in-reverse	Standard	Standard	Standard
DIMENSIONS			
Vibration value body/K-factor	1.0 / 0.5 m/s ²	1.0 / 0.5 m/s ²	1.0 / 0.5 m/s ²
Vibration value hand/arm / K-factor	5.0 / 1.5 m/s ²	5.0 / 1.5 m/s ²	5.0 / 1.5 m/s ²
Dimensions (L/W/H)	180 cm / 134 cm / 100 cm	180 cm / 146 cm / 110 cm	180 cm / 144 cm / 110 cm
Net weight	210 kg	215 kg	230 kg

	XT2 ES107	XT3 QR106	XT3 QS127
ENGINE			
Engine type	Cub Cadet 56 V / 60 Ah / 3,000 Wh	Kawasaki	Kawasaki
Engine displacement/ Output Watts (only XT2 ES107)	3 kW	726 cm ³	726 cm ³
Rated power	3 kW / 2,100 min ⁻¹	11.8 kW / 2,200 min ⁻¹	13.7 kW / 2,800 min ⁻¹
Cylinders	–	V-TWIN dual cylinder	V-TWIN dual cylinder
Tank volume (capacity)	–	11.4 l	11.4 l
DRIVE SYSTEM			
Transmission	Electric drive	Hydrostatic, All-Ground Traction System	Hydrostatic, All-Ground Traction System
Speeds	Infinitely variable	Infinitely variable (f/r)	Infinitely variable
Control	Foot pedal control	Foot pedal control	Foot pedal control
Cruise control	Standard	Standard	Standard
CUTTING SYSTEM			
Mowing area in m ² h	8,000	8,000	10,000
Cutting width	107cm / 42"	106 cm / 42"	127 cm / 50"
Cutting height (min-max)	25–100 mm	25–100 mm	25–100 mm
Cutting deck	Stamped	Stamped	Stamped
Number of blades	2	2	3
Deck engagement	Electric PTO	Electric PTO	Electric PTO
Deck height positions	12 positions	12 positions	12 positions
Deck wheels	2 balls deck wheels	4 balls deck wheels	4 balls deck wheels
Wash nozzle/Mulch Kit/mulching blades	–/Standard/–	Standard/(196-550-000)/ (196-560-000)	Standard/Standard/Standard
DISCHARGE SYSTEM			
Bag (capacity)/accessory no.	Optional 200 l/(19A30030100)	360 l, with Anti-Dust System/–	Optional 210 l/(19A30018100)
Bag lever/hardtop	–/–	Rounded ergo telescopic handle/Plastic	–/–
Bag fill indicator/grass deflector	–/Standard	Deluxe w Blade Shutoff/ (196-552A000)	–/Standard
FRAME			
Front axle	Heavy-duty cast-iron	Heavy-duty cast-iron	Heavy-duty cast-iron
Front bumper	Standard, blue / –	Bull Bar	Bull Bar
Turning circle	TIGHT TURN xTREME 17 cm	TIGHT TURN xTREME 17 cm	TIGHT TURN xTREME 17 cm
Wheel size (f/r in inch)	15 x 6 / 20 x 8	15 x 6 Turf Saver / 18 x 8.5	16 x 6.5-8 / 22 x 9.5
Wheel bearings	Sleeve bearings	Sleeve bearings	Ball bearings
Frame	Robotically-welded	Fully robotically-welded frame	Robotically-welded
ELECTRIC			
Headlights	LED	LED	LED
COMFORT			
Seat type	Cut & Sew, high back rest	High Back Seat Cub Cadet/Armrests	Cut & sew, high back rest, with armrests
Seat adjustment	Lever, angled, 10 slide	Lever, angled, 10 slide	Lever, angled, 10 slide
Steering wheel	Ergonomic with gentle touch	1 piece	Ergonomic with gentle touch
Toolbox/Cupholder	Standard/Standard	Standard/Standard	Standard/Standard
Mow-in-reverse	Standard	Standard	Standard
USB Port	Standard	–	–
DIMENSIONS			
Vibration value body/K-factor	1.0 / 0.5 m/s ²	1.0 / 0.5 m/s ²	1.0 / 0.5 m/s ²
Vibration value hand/arm / K-factor	5.0 / 1.5 m/s ²	5.0 / 1.5 m/s ²	5.0 / 1.5 m/s ²
Dimensions (L/W/H)	180 cm / 115 cm / 120 cm	267 cm / 110 cm / 118 cm	197 cm / 155 cm / 110 cm
Net weight	245 kg	268 kg	260 kg

LAWN TRACTOR ACCESSORIES

The range of Cub Cadet accessories will help with your gardening requirements & means you can use your lawn tractor all year round.

	NEW DEWALT BRANDED 800LB COMBI CART	
	The DEWALT DXTB0573 combi cart is an easy to use, excellent alternative to an ordinary wheelbarrow and, if it becomes too heavy to push, simply convert it from a wheelbarrow to a tow-behind cart in seconds and let your garden tractor take all the effort of pulling for you.	Part number: DXTB0573
	STEEL CARGO CARRYING PLATFORM FOR XT SERIES SIDE DISCHARGER	
	<ul style="list-style-type: none"> Foldable vertically and lockable in place Easy to install thanks to the FastAttach™ System Max. weight: 36 kg Suitable for XT Series side-dischargers 	Part number: 19A30029100
	ELECTRIC SPREADER FOR XT SERIES SIDE DISCHARGER	
	<ul style="list-style-type: none"> Easy to install thanks to the FastAttach™ System Can be switched on/off from the driver's seat Capacity: 45 kg Suitable for XT Series side-dischargers 	Part number: 19A30028100
	MULCH KITS	
	Mulch Kit (without blades) for model LT1 NS96 and LT2 NS96	Part number: OEM-190-116
	Mulch Kit (without blades) for models LT1 NR92, LT2 NR92 and LT3 PR105	Part number: 196-749A678
	Mulch Kit (without blade) for models XT1 OR106, XT2 QR106, XT2 PR106ie and XT3 QR106, optional mulching blades available (196-560-000)	Part number: 196-550-000
	Mulch Kit (without blade) for models XT1 OR95, XT2 PR95 and XT3 QR95, optional mulching blades available (196-561-000)	Part number: 196-551-000
	AGRICULTURAL TYRES	
	Chevron style rear wheels 18" x 9,5". Set consists of 2 cpl. wheels. Fits all tractors with either 18" or 20" rear wheels. Not approved for XT3 models.	Part number: 196-721A678
	GRASS BAGS	
	Anti-Dust-System for 360 l grass collection system, XT3 Series	Part number: 196-553-603
	Anti-Dust-System for 320 l grass collection system, XT1 and XT2 Series	Part number: 196-555-603
	Twin bagger, 200 l, for 96 cm / 107 cm decks of LT Series (models - 2022)	Part number: OEM-190-180A
	Twin bagger, 200 l, for 96 cm decks of XT Series (models - 2022)	Part number: OEMR190-180A
	Twin bagger for side discharge lawn tractors, 229 l, for 92 cm decks (model year 2023-), e.g. LT1 NS92, LT2 NS92, with flexible tube and sight window	Part number: 19A30045OEM
	Twin bagger for side discharge lawn tractors 229 l, for 107 cm decks (model year 2023-), e.g. LT3 PS107, XT1 OS107, XT2 PS107, with flexible tube and sight window	Part number: 19A30031OEM
	Twin bagger for 200 l, for 107 / 117 cm, with variable tube, inspection window and FastAttach™ System, for decks of XT Series	Part number: 19A30030100
	Triple bagger 210 l, for 127 / 137 cm decks of XT Series	Part number: 19A30018100

	FRONT BUMPER				
	Front bumper Kit with FastAttach™ fits all LT Series lawn tractors			Part number: OEM-190-679	
	DEFLECTORS				
	Rear deflector for all XT Series rear-discharger models			Part number: 196-552A000	
	Rear deflector for LT Series rear-discharger models			Part number: 196-750A678	
	LAWN TRACTOR COVER				
	Size XL: for large-sized and rear discharge lawn tractors			Part number: 19A19021603	
	SNOW CHAINS				
	For 20" x 8.0" wheels incl. adapter			Part number: 196-658-699	
	For 18" x 8.5" wheels incl. adapter			Part number: 490-241-0022	
	For XT 22" x 9", 5" x 12" and 23" x 9", 5" x 12" wheels			Part number: 490-241-0025	
	DOZER BLADE AND RUBBER LIP				
	117 cm dozer blade for LT Series			Part number: OEM-190-833	
	Rubber lip – universal – for all dozer blades			Part number: 196-718-678	
	117 cm dozer blade for LT und XT Series			Part number: 19A30017OEM	
ADDITIONAL ACCESSORIES					
Rear hitch for LT series with rear discharge	Part number: 196-399-000	Mulch Blades for 106cm XT1, XT2, XT3 direct collect	Part number: 196-560-000	Mulch Blades for 95cm XT1, XT2, XT3 direct collect	Part number: 196-561-000
Electrical grass catcher emptying mechanism for XT Series rear discharger system. Suitable for 2018+ models.			Part number: 196-570-600		