

Groundcare

Equipment Catalogue

OUR DEALERS

Our UK network of dealers will help you find the product to suit your requirements; they also offer advice, servicing, parts and product support from warranty to repairs on all our products.

The dealer locator on our website will help you find your nearest dealer.
Visit us online for further product information and updates.

www.lawnflite.co.uk ▪ www.mantis.uk.com

www.gtmchippers.co.uk ▪ www.littlewonder.com ▪ www.classen.com

WARRANTY

A warranty is issued on all our garden machinery. This warranty covers faulty manufacture and materials of units which have been operated and maintained in accordance with the owner's instructions furnished with the unit and which have not been subject to misuse, abuse, neglect, accident, improper maintenance or alteration. Please see individual product pages for the length of warranty.

Annual servicing by an authorised Lawnflite specialist dealer will keep your equipment in top condition and ensure your machinery meets the Lawnflite two year warranty conditions.

Text and photographs, specifications of dimensions and performance are composed with the greatest care. The correctness of the information cannot be guaranteed, especially it is not guaranteed that the products comply with the images regarding colour, form and equipment or that the products comply with the proportion of the images. The engine horsepower information provided by the engine manufacturer is to be used for comparison purposes only.

Amendments due to misprints or errors are reserved. Please see the operator's manual and the warning labels posted on the item itself for more details.

Groundcare

Equipment Catalogue



Everything for experienced and professional gardeners

2024

Specifications and/or prices are subject to change without notice. Every effort is made to produce sales literature and price lists that are accurate and current.

BARRUS
The Power
Behind The Brands

Lawnflite • Lawnflite Pro • AgriFab • GTM • Mantis • Classen • Little Wonder - Supported by Barrus
E. P. Barrus Ltd, Glen Way, Launton Road, Bicester, Oxfordshire, OX26 4UR.
Tel: 01869 363641 www.barrus.co.uk

Doc. No. 4989

LAWNFLITE

**LAWNFLITE
PRO**


Agri-Fab

**GTM
PROFESSIONAL**

Mantis

CLASSEN

LITTLE WONDER

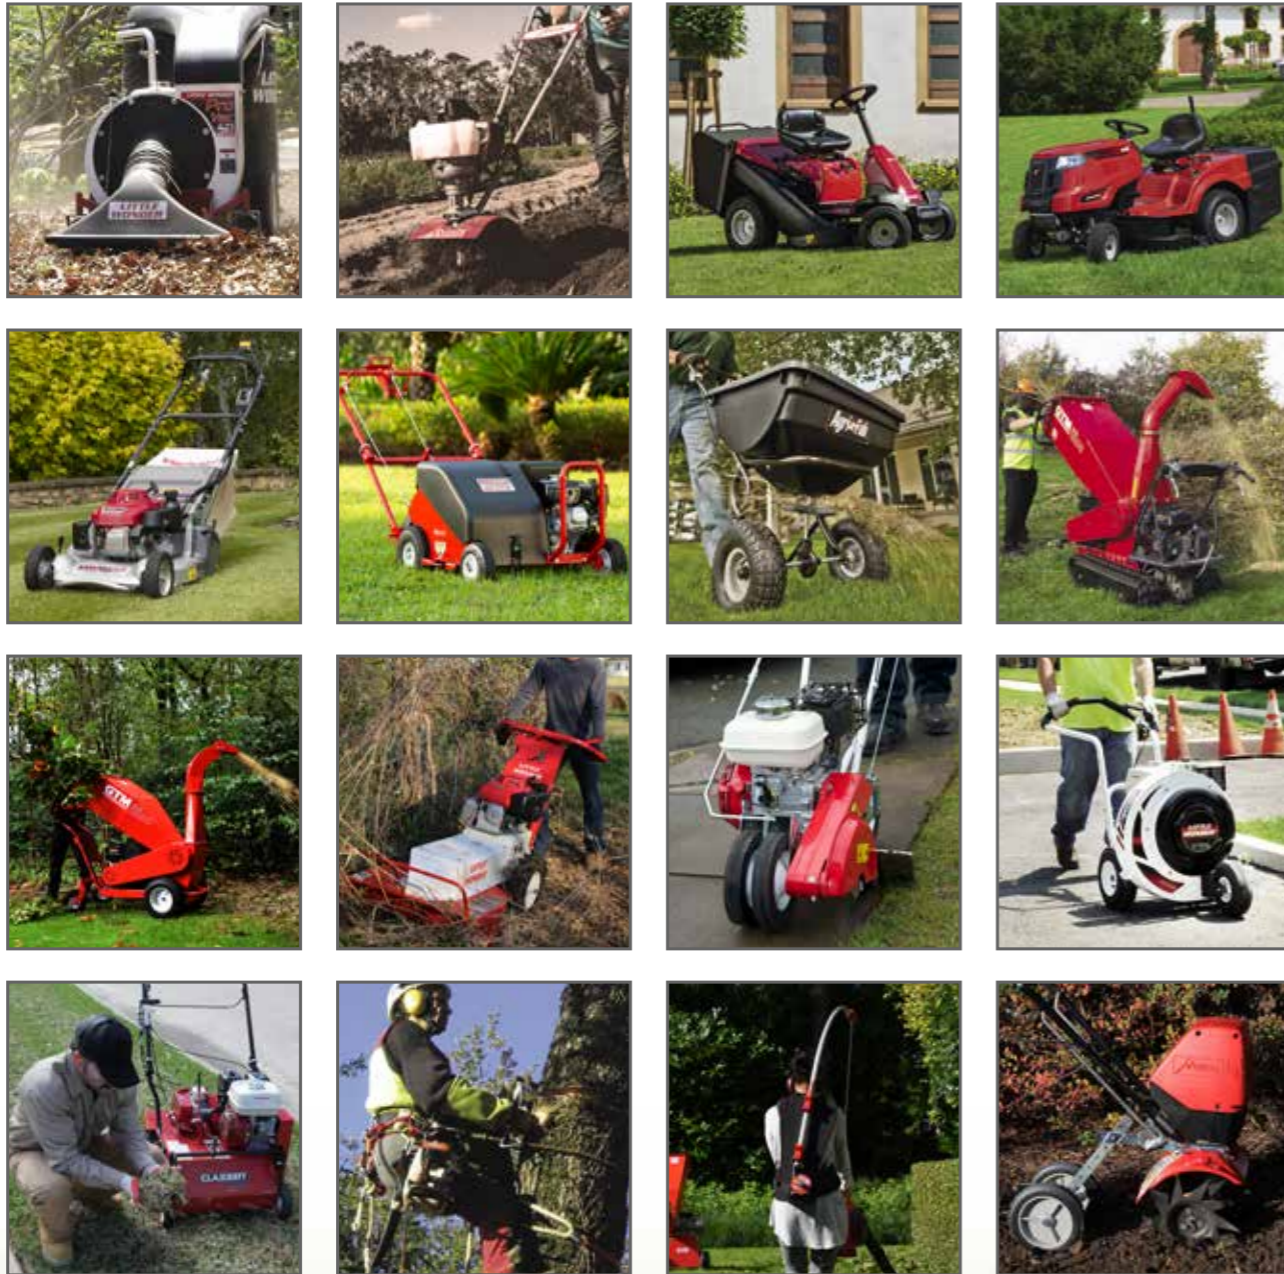

Contents

LAWNMOWERS

LAWNFLITE PRO - PROFESSIONAL MOWERS 5-9

SCYTHE MOWER..... 10

LAWN TRACTORS

SMART MINI-RIDERS 11-12

OPTIMA MINI-RIDER 13

SMART LAWN TRACTORS 14-16

OPTIMA LAWN TRACTORS 17-18

LAWN TRACTOR ACCESSORIES

LAWNFLITE 19-22

AGRI-FAB 23-42

LAWN AND GARDEN CARE PRODUCTS

SCARIFIERS 43-44

WHEELED TRIMMER..... 45

LOG SPLITTERS 46

MANTIS - TILLERS AND CULTIVATORS 47-55

MANTIS - COMPOSTUMBLERS..... 56-59

GTM - WOOD CHIPPERS AND TREECARE 60-76

GROUND CARE AND TURF CARE PRODUCTS

CLASSEN - PROFESSIONAL TURF CARE EQUIPMENT 77-84

LITTLE WONDER - LANDSCAPING DEBRIS MANAGEMENT EQUIPMENT 85-91

Introduction

We have everything you need for a perfect garden – whether you are an everyday or expert home gardener or a groundcare and turf care professional.

EXPERT RANGES

Lawnflite from lawn tractors to spreaders and trailers to scarifiers we have a wide range for the everyday and expert home gardener.

Agri-Fab® lawn products are designed for homeowners who want a beautiful lawn. The quality, time-saving products including spreaders, dethatchers and trailers, will ensure you get the most out of your lawn tractor.

Mantis’ range of tillers will help you grow great gardens and keep your lawns looking their best.

GTM’s range of compact and powerful wood chippers are designed to offer a portable option for chipping branches and crops – perfect for tree care, landscaping, forestry and garden maintenance for expert gardeners and professionals.

PROFESSIONAL RANGES

Lawnflite PRO’s range of lawnmowers and roller mowers are built to professional specifications with shaft driven gear boxes, heavy duty alloy decks and sealed roller bearings.

Little Wonder offers a range of landscaping debris management equipment that will stand up to your needs, season after season.

Classen professional turf care equipment comes with productivity-enhancing features to help professionals complete more projects quickly and easily to increase profit.



MOWERS FOR PROFESSIONALS

Built to professional specifications, with shaft driven gear boxes, heavy duty alloy decks, sealed roller bearings and strong handles, the Lawnflite Pro range offers a machine to suit all applications.

For that fine lawn finish, the 448HR and 553HRS roller drive models are single speed with full width steel rollers producing a beautiful pronounced stripe on your lawn. They are quiet in operation, have fan assisted collection and a blade brake clutch which means you don't have to re-start the engine when emptying the grassbag.

The 553HRS-PROHS sports a high speed gearbox to make short work of long lawns, 18% faster than the standard model 553HRS.

The top of the range 553HRSP-HST is a hydrostatic roller lawn mower which is 50% faster than the 553HRS-PROHS.

The four models in the wheeled range have all the features and benefits of the Lawnflite Pro roller mowers. The 448HW, 553HWS and 553HWS-PRO have 2 speed shaft drive gearboxes giving selectable speed to suit differing conditions. The 553HWSP-HST has the additional benefit of Hydrostatic drive.

The Pro models also offer additional features for the professional user including a front mounted bumper, strong handle tubes of 25mm plus an additional handle support bracket, a steel deck liner and on the wheeled models, 23 cm / 9" alloy twin bearing wheels. The advanced fan assisted collection system ensures a superior quality of cut even on wet grass.

KEY BENEFITS

- 1 Heavy duty alloy decks built for professional use
- 2 Shaft driven gearbox offers extra durability
- 3 Blade brake clutch stops the blade turning when emptying the grass bag
- 4 Roller mower options provide the fine traditional striped finish
- 5 Large heavy duty 70 or 75 litre fabric grass bag enables longer mowing time
- 6 Quiet operation with fan assisted collection
- 7 Mulch kit and deflector available as accessories (71902-218 and 71901-924)



POWERED by
HONDA

WARRANTY*

*12 months commercial warranty, 2 years for domestic use providing the machine is serviced by the supplying dealer. 90 days when sold and used for hire.

**WARRANTY***

*12 months commercial warranty. 2 years for domestic use providing the machine is serviced by the supplying dealer. 90 days when sold and used for hire.

MODELS AVAILABLE

POWERED BY HONDA	Model	553HRSP-HST
ROLLER MOWER	Cutting width	53 cm / 21"
	Engine	Honda
	Rated power (kW/min ⁻¹)	3.4 / 3,600
HYDROSTAT	Drive	Hydrostatic
EXCEPTIONALLY FAST	Variable speed (km/h)	0 - 6.5
	Deck material	Alloy with steel deck liner
	Start	Easy pull
	Height adjustment	Lever height adjustment
	Handle	Strengthened, folding bolted
	Grass bag (approx.)	75 ltr
	Mulch kit	N/A
	Deflector	N/A
	Wheels (f/r)	200 mm
	Cutting height	15-77 mm
	Weight (approx.)	66 kg
	Vib. value body	2.4 m/s ²

**WARRANTY***

*12 months commercial warranty. 2 years for domestic use providing the machine is serviced by the supplying dealer. 90 days when sold and used for hire.

POWERED BY HONDA	Model	553HRS-PROHS
ROLLER MOWER	Cutting width	53 cm / 21"
	Engine	Honda
	Rated power (kW/min ⁻¹)	3.4 / 3,600
HIGH SPEED	Drive	Self propelled
	Speed (km/h)	4.6
	Deck material	Alloy with steel deck liner
	Start	Easy pull
	Height adjustment	Lever height adjustment
	Handle	Strengthened, folding bolted
	Grass bag (approx.)	75 ltr
	Mulch kit	Optional - 71902-218
	Deflector	Optional rear - 71901-924
	Wheels (f/r)	200 mm
	Cutting height	15-77 mm
	Weight (approx.)	58 kg
	Vib. value body	2.4 m/s ²

POWERED BY HONDA	Model	553HRS
ROLLER MOWER	Cutting width	53 cm / 21"
	Engine	Honda
	Rated power (kW/min ⁻¹)	3.4 / 3,600
	Drive	Self propelled
	Speed (km/h)	3.9
	Deck material	Alloy
	Start	Easy pull
	Height adjustment	Lever height adjustment
	Handle	Folding bolted
	Grass bag (approx.)	75 ltr
	Mulch kit	Optional - 71902-218
	Deflector	Optional rear - 71901-924
	Wheels (f/r)	200 mm
	Cutting height	15-77 mm
	Weight (approx.)	56 kg
	Vib. value body	2.4 m/s ²

POWERED BY HONDA	Model	448HR
ROLLER MOWER	Cutting width	48 cm / 19"
	Engine	Honda
	Rated power (kW/min ⁻¹)	3.7 / 3,600
	Drive	Self propelled
	Speed (km/h)	3.9
	Deck material	Alloy
	Start	Easy pull
	Height adjustment	Lever height adjustment
	Handle	Folding wing nut
	Grass bag (approx.)	70 ltr
	Mulch kit	N/A
	Deflector	N/A
	Wheels (f/r)	200 mm
	Cutting height	15-77 mm
	Weight (approx.)	50 kg
	Vib. value body	2.2 m/s ²



POWERED BY
HONDA
HYDROSTAT
**EXCEPTIONALLY
FAST**

Model	553HWSP-HST
Cutting width	53 cm / 21"
Engine	Honda
Rated power (kW/min ⁻¹)	3.4 / 3,600
Drive	Hydrostatic
Variable speed (km/h)	0 - 6
Deck material	Alloy with steel deck liner
Start	Easy pull
Height adjustment	Lever height adjustment
Handle	Handle strengthened, folding bolted
Grass bag (approx.)	75 ltr
Mulch kit	Optional - 71902-218
Deflector	Optional rear - 71901-924
Wheels (f/r)	230 mm / 230 mm
Cutting height	22-84 mm
Weight (approx.)	68 kg
Vib. value body	2.4 m/s ²



POWERED BY
HONDA
**POWER
DRIVE**

Model	553HWS-PRO
Cutting width	53 cm / 21"
Engine	Honda
Rated power (kW/min ⁻¹)	3.4 / 3,600
Drive	Self propelled, 2 speed
Speed (km/h)	3.9
Deck material	Alloy with steel deck liner
Start	Easy pull
Height adjustment	Lever height adjustment
Handle	Strengthened, folding bolted
Grass bag (approx.)	75 ltr
Mulch kit	Optional - 71902-218
Deflector	Optional rear - 71901-924
Wheels (f/r)	230 mm / 230 mm
Cutting height	22-82 mm
Weight (approx.)	62 kg
Vib. value body	2.4 m/s ²

WARRANTY*

*12 months commercial warranty, 2 years for domestic use providing the machine is serviced by the supplying dealer. 90 days when sold and used for hire.

Mulch kit and deflector available as accessories (71902-218 and 71901-924)

POWERED BY
HONDA
**POWER
DRIVE**



Model	553HWS
Cutting width	53 cm / 21"
Engine	Honda
Rated power (kW/min ⁻¹)	3.4 / 3,600
Drive	Self propelled, 2 speed
Speed (km/h)	3.9
Deck material	Alloy
Start	Easy pull
Height adjustment	Lever height adjustment
Handle	Folding bolted
Grass bag (approx.)	75 ltr
Mulch kit	Optional - 71902-218
Deflector	Optional rear kit - 71901-924
Wheels (f/r)	200 mm / 200 mm
Cutting height	15-77 mm
Weight (approx.)	56 kg
Vib. value body	2.4 m/s ²



POWERED BY
HONDA
**POWER
DRIVE**

Model	448HW
Cutting width	48 cm / 19"
Engine	Honda
Rated power (kW/min ⁻¹)	3.7 / 3,600
Drive	Self propelled, 2 speed
Speed (km/h)	3.9
Deck material	Alloy
Start	Easy pull
Height adjustment	Lever height adjustment
Handle	Folding wing nut
Grass bag (approx.)	70 ltr
Mulch kit	N/A
Deflector	N/A
Wheels (f/r)	200 mm / 200 mm
Cutting height	15-77 mm
Weight (approx.)	50 kg
Vib. value body	2.2 m/s ²

WARRANTY*

*12 months commercial warranty, 2 years for domestic use providing the machine is serviced by the supplying dealer. 90 days when sold and used for hire.



SCYTHER MOWER

With a working width of 87 cm / 34" and a powerful Briggs & Stratton engine, the scythe field mower is the ideal mower for long grass, meadows and paddocks.

An optional dozer blade is available for snow clearing and moving soil, making the scythe field mower a valuable helper throughout the year.

The mower tackles brambles and overgrown areas that would not be suitable for a conventional mower or brushcutter. With height adjustable handles and pneumatic wheels making it both comfortable and easy to use.

KEY BENEFITS

- 1 Non-clogging universal knife bar with hardened knife blades
- 2 Handle adjustable to suit height of operator
- 3 87 cm / 34" cutting width with adjustable skid plates and side bumper
- 4 Pneumatic wheels



MODEL AVAILABLE



Model	BM87-35
Cutting width	87 cm / 34"
Engine	B&S OHV 450 E Series, 125 cc
Rated power (kW/min ¹)	1.7 / 3,100
Drive	Standard
Cutting system	Universal sickle bar with 4 bar guides
Start	Pull
Height adjustment	10 - 30 mm
Handle	Foldable
Fuel capacity	0.8 ltr
Chassis	Steel
Wheels	13" x 5" x 6", pneumatic
Weight (approx.)	53 kg
LpA/LwA/LwAg (dB)	86 / 98 / 99

2 YEARS WARRANTY*

*2 years for domestic providing the machine is serviced by the supplying dealer.



KEY BENEFITS

- 1 Laterally displaced deck allows mowing close to edges
- 2 Space saving storage thanks to small dimensions
- 3 Large grass bag (Standard on MINIRIDER60RDE)
- 4 "Shift-on-the-go" transmatic transmission with 6 speeds
- 5 Step through frame makes getting on and off easy
- 6 Optional mulch kits and hitch kits available as accessories



2 YEARS WARRANTY*

*2 years for domestic providing the machine is serviced by the supplying dealer.

SMART MINI-RIDERS

Our Smart mini-riders provide all the benefits of a lawn tractor in a more compact and manoeuvrable size. They are easy to operate, have an attractive design and are really versatile: they can bag, discharge or mulch grass clippings (optional kits may be required).


They are ideal for gardens where the use of a tractor is restricted by flowerbeds, bushes or corners.

The step through frame makes getting on and off easy and the choice of transmissions delivers a smooth and comfortable ride. After use thanks to their compact design they can be stored away easily.



MODELS AVAILABLE

Model	MINIRIDER60SDE
Cutting width	60 cm / 24"
Height adjustment	5 positions, 38-95 mm
Engine	MTD, 1 cylinder, 196 cc
Start	Electric
Rated power (kW/min ⁻¹)	3.3 / 3,000
Fuel capacity (approx.)	1.2 ltr
Transmission	Transmatic
Grass bag (approx.)	N/A
Mulch kit	Mulch plug only: Available as accessory (731-2505)
Deflector	Standard
Turning radius	46 cm / 18"
Wheels (f/r)	13" x 5" / 16" x 6.5"
Measurements (approx.)	L158 / W 78 / H 112 cm
Weight (approx.)	111 kg
Vib. value body (K Factor)	1 / 0.5 m/s ²
LpA/LwA/LwAg (dB)	86 / 96 / 98

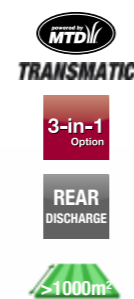

Model	MINIRIDER60RDE
Cutting width	60 cm / 24"
Height adjustment	5 positions, 38-95 mm
Engine	MTD, 1 cylinder, 196 cc
Start	Electric
Rated power (kW/min ⁻¹)	3.3 / 2,850
Fuel capacity (approx.)	1.2 ltr
Transmission	Transmatic
Grass bag (approx.)	150 ltr
Deflector / Mulch kit	Available as accessory (Part no.: 196-707-678)
Turning radius	46 cm / 18"
Wheels (f/r)	13" x 5" / 16" x 6.5"
Measurements (approx.)	L192 / W 83 / H 112 cm
Weight (approx.)	140 kg
Vib. value body (K Factor)	1 / 0.5 m/s ²
LpA/LwA/LwAg (dB)	86 / 96 / 98

Tow hitches are available as an optional accessory for side (196-397-000) and rear discharge (196-398-000) mini-riders.

2 YEARS WARRANTY*

*2 years for domestic providing the machine is serviced by the supplying dealer.



OPTIMA MINI-RIDER


If you need to cut around a third of an acre up to one acre and are looking for a machine that is well equipped, simple to use and easy to store with small dimensions, then the Optima mini-rider is for you.

It combines all the advantages of a mini-rider with the performance of a lawn tractor. The step-through frame has no pedals or switches to get in the way, making getting on and off the machine safe and easy. The compact design ensures you can get around all those awkward areas in the garden and store the machine easily after use.

KEY BENEFITS

- 1 Smooth and powerful MTD engine with convenient electric start
- 2 Six speed transmatic transmission with continuous variable shifting or hydrostatic transmission
- 3 Laterally displaced deck allows mowing close to lawn edges
- 4 Compact design with a small turning radius of only 46 cm / 18"
- 5 Step through frame makes getting on and off safe and easy
- 6 200 ltr twin bag collector. NOTE: Will require additional high lift bagging blade 742-05621A.

MODEL AVAILABLE

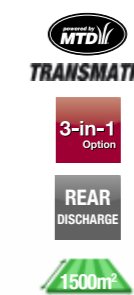

Model	MINIRIDER76RDE
Cutting width	76 cm / 30"
Height adjustment	5 positions, 38-95 mm
Engine	MTD, 1 cylinder, 382 cc
Start	Electric
Rated power (kW/min ⁻¹)	7.9 / 2,900
Fuel capacity (approx.)	4.9 ltr
Transmission	Transmatic
Grass bag (approx.)	150 ltr
Deflector/Mulch kit	Available as accessory (Part no.: 196-334-600)
Turning radius	46 cm / 18"
Wheels (f/r)	13" x 5" / 16" x 6.5"
Measurements (approx.)	L192 / W 83 / H 112 cm
Weight (approx.)	145 kg
Vib. value body (K Factor)	1 / 0.5 m/s ²
LpA/LwA/LwAg (dB)	88 / 98 / 100

2 YEARS WARRANTY*

*2 years for domestic providing the machine is serviced by the supplying dealer.

Tow Hitches are available as an optional accessory for side (196-397-000) and rear discharge (196-398-000) mini-riders.



SMART LAWN TRACTORS

If you have a large lawn to mow and want the job done as quickly as possible, a Smart lawn tractor is the perfect choice for you, whether you opt for a rear discharge or side discharge model.

Smart lawn tractors are practical, robust and reliable, and with a cutting width of 92 cm / 36" to 105 cm / 41", they are ideal for areas measuring 1000m² to 3000m².

The cutting height can be easily adjusted to five positions between 30mm and 95mm. Thanks to the small turning radius of 46 cm / 18", mowing around bushes and flowerbeds is safe and simple.

For your comfort a step through frame, makes it easy to get on and off, as well as an adjustable seat, headlights and ergonomically designed controls for deck engagement and transmission. A large grass bag means you can mow large areas quickly and in comfort.

KEY BENEFITS


- 1 Step through frame makes getting on and off easy
- 2 Large grass bag offers the ability to cover large areas in a short time
- 3 Small turning radius of only 46 cm / 18"
- 4 Offset deck allows mowing close to the edge
- 5 Floating deck and pivoting front axle enables smooth engagement
- 6 Shift-on-the-go with continuous variable shifting
- 7 Wash out port can be added as an option
- 8 Improved performance cutting deck




2 YEARS WARRANTY*

*2 years for domestic providing the machine is serviced by the supplying dealer.

MODELS AVAILABLE

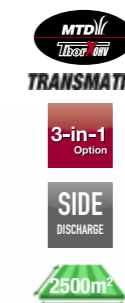


Model	RF125
Cutting width	92 cm / 36"
Height adjustment	5 positions, 30-95 mm
Engine	MTD, 1 cylinder, 382 cc
Start	Electric
Rated power (kW min ⁻¹)	6.8 / 2,500
Fuel capacity (approx.)	3.8 ltr
Transmission	Transmatic
Grass bag (approx.)	Available as accessory 19A300450EM
Mulch kit	Included
Deflector	Standard
Turning radius	46 cm / 18"
Wheels (f/r)	15" x 6" / 20" x 8"
Measurements (approx.)	L170 / W 107 / H 100 cm
Weight (approx.)	149kg
Vib. value body (K Factor)	1 / 0.5 m/s ²
LpA/LwAswAg (dB)	88 / 98 / 100
Front bumper	Optional
Seat style	Low back

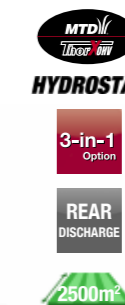


Model	RE130H
Cutting width	92 cm / 36"
Height adjustment	5 positions, 30-95 mm
Engine	MTD, 1 cylinder, 439 cc
Start	Electric
Rated power (kW/min ⁻¹)	8.1 / 2,700
Fuel capacity (approx.)	3.8 ltr
Transmission	Hydrostatic
Grass bag (approx.)	240 ltr, soft bag with hard top
Mulch kit	Available as accessory (Part no.: 196-749A678)
Deflector	Available as accessory (Part no.: 196-750A678)
Turning radius	46 cm / 18"
Wheels (f/r)	13" x 5" / 18" x 6.5"
Measurements (approx.)	L225 / W 99 / H 103 cm
Weight (approx.)	196 kg
Vib. value body (K Factor)	1 / 0.5 m/s ²
LpA/LwA/LwAg (dB)	88 / 98 / 100
Front bumper	Optional
Seat style	Low back
Tow Hitch	Available as accessory (Part no.: 196-399-000)

2 YEARS WARRANTY*

*2 years for domestic providing the machine is serviced by the supplying dealer.



Model	RN145
Cutting width	105 cm / 41"
Height adjustment	5 positions, 30-95 mm
Engine	MTD, 1 cylinder, 547 cc
Start	Electric
Rated power (kW/min ⁻¹)	9.4 / 2,350
Fuel capacity (approx.)	3.8 ltr
Transmission	Transmatic
Grass bag (approx.)	240 ltr, soft bag with hard top
Mulch kit	Available as accessory (Part no.: 196-749A678)
Deflector	Available as accessory (Part no.: 196-750A678)
Turning radius	46 cm / 18"
Wheels (f/r)	15" x 6" / 18" x 9.5"
Measurements (approx.)	L225 / W 110 / H 103 cm
Weight (approx.)	198 kg
Vib. value body (K Factor)	1 / 0.5 m/s ²
LpA/LwA/LwAg (dB)	88 / 98 / 100
Drive	7 speed
Front bumper	Optional
Seat style	Low back
Reverse mowing control	Yes
Tow Hitch	Available as accessory (Part no.: 196-399-000)

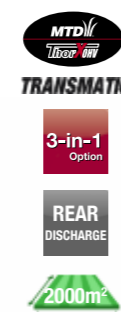

Model	RE125
Cutting width	92 cm / 36"
Height adjustment	5 positions, 30-95 mm
Engine	MTD, 1 cylinder, 382 cc
Start	Electric
Rated power (kW/min ⁻¹)	7.1 / 2,600
Fuel capacity (approx.)	3.8 ltr
Transmission	Transmatic
Grass bag (approx.)	240 ltr, soft bag with hard top
Mulch kit	Available as accessory (Part no.: 196-749A678)
Deflector	Available as accessory (Part no.: 196-750A678)
Turning radius	46 cm / 18"
Wheels (f/r)	13" x 5" / 18" x 6.5"
Measurements (approx.)	L225 / W 99 / H 103 cm
Weight (approx.)	195 kg
Vib. value body (K Factor)	1 / 0.5 m/s ²
LpA/LwA/LwAg (dB)	88 / 98 / 100
Drive	7 speed
Front bumper	Optional
Seat style	Low back
Tow Hitch	Available as accessory (Part no.: 196-399-000)



2 YEARS WARRANTY*

*2 years for domestic providing the machine is serviced by the supplying dealer.



OPTIMA LAWN TRACTORS

Comfortable and versatile – you won't have to sacrifice a thing with Optima lawn tractors. With large cutting widths of 105 cm / 41" and 107 cm / 42" they are ideal for mowing large areas.

Optima lawn tractors are fitted with a high-performance engine, guaranteeing long service life, as well as a low-maintenance robust hydrostatic transmission as standard for a smooth and comfortable ride.

The forward-folding and removable hood gives easy access for maintenance work at any time. The floating deck adapts to uneven ground on rough terrains.

With the addition of useful accessories such as a trailer, spreader or roller; a wide range of home and garden jobs can be completed quickly and easily all year round.

KEY BENEFITS

- 1 Powerful and quiet MTD engine
- 2 Small turning radius of only 46 cm / 18"
- 3 Step through frame makes getting on and off easy
- 4 Floating deck and pivoting front axle enables smooth engagement
- 5 Large grass bag offers the ability to cover large areas in a short time
- 6 The LN200H with rear discharge has a grass bag which is easy to empty from the driver's seat
- 7 Wash out port can be added as an option
- 8 Improved performance cutting deck



2 YEARS WARRANTY*

*2 years for domestic providing the machine is serviced by the supplying dealer.





MODELS AVAILABLE



Model	LG200H
Cutting width	107 cm / 42"
Height adjustment	5 positions, 30-95 mm
Engine	MTD, V Twin 679 cc
Start	Electric
Rated power (kW/min ⁻¹)	12.5 / 2.800
Fuel capacity (approx.)	3.8 ltr
Transmission	Automatic
Grass bag	Available as accessory (Part no.: 19B30031OEM)
Mulch kit	Standard
Deflector	Standard
Turning radius	46 cm / 18"
Wheels (f/r)	15" x 6" / 20" x 8"
Measurements (approx.)	L170 / W 115 / H 100 cm
Weight (approx.)	175 kg
Vib. value body (K Factor)	1 / 0.5 m/s ²
LpA/LwA/LwAg (dB)	88 / 98 / 100
Drive	Foot CVT
Reverse mowing control	Yes
Seat style	High back
Front bumper	Yes



Model	LN200H
Cutting width	105 cm / 41"
Height adjustment	5 positions, 30-95 mm
Engine	MTD, V Twin 679 cc
Start	Electric
Rated power (kW/min ⁻¹)	11.6 / 2,600
Fuel capacity (approx.)	3.8 ltr
Transmission	Hydrostatic
Grass bag (approx.)	240 ltr
Mulch kit	Available as accessory (Part no.: 196-749A678)
Deflector	Available as accessory (Part no.: 196-750A678)
Turning radius	46 cm / 18"
Wheels (f/r)	15" x 6" / 18" x 9.5"
Measurements (approx.)	L225 / W 110 / H 103 cm
Weight (approx.)	198 kg
Vib. value body (K Factor)	1 / 0.5 m/s ²
LpA/LwA/LwAg (dB)	88 / 98 / 100
Reverse mowing control	Yes
Seat style	High back
Front bumper	Yes

2 YEARS WARRANTY*

*2 years for domestic providing the machine is serviced by the supplying dealer.

Tow Hitch is available as an optional accessory for the LN200H (196-399-000).



LAWNFLITE LAWN TRACTOR PRODUCTS

Our Lawnflite range of equipment includes trailers, de-thatchers, spreaders and rollers. To help you get the maximum out of your lawn tractor most products can be towed behind to help with jobs around the garden.

- **Trailers** are ideal for loading/unloading soil, gravel and sand
- A **Dethatcher** will remove moss and thatch from your lawn to allow your lawn to breathe
- **Spreaders** are suitable for distributing fertiliser, grass seed and salt
- A **Steel roller** will help you achieve the traditional green stripes in your lawn

TRAILERS

UTILITY STEEL TRAILER LSC500

Ideal for unloading soil, gravel and sand as well as carrying tools, animal feed, landscaping materials and firewood. Removable tailgate and foot pedal release help with loading and unloading and the trailer can easily convert into a flat-bed trailer without the need for tools.

Suitable to use with all makes of lawn tractor, it has a capacity of 500lbs and a trailer bed that measures 97 x 71.5 x 30 cm.



T-HANDLE PUSH/TOW POLYPROPYLENE TRAILER LPC650

The versatile polypropylene trailer can be used with your lawn tractor as a tow behind trailer or as a hand wheeled trailer with a comfortable T-handle. The one piece polypropylene bed is resistant to rust with a slanted tail end and foot pedal release mechanism for easy tipping. With a 650 lbs capacity, it's a versatile choice for your garden.



UTILITY POLYPROPYLENE TRAILER LPC1200

The polypropylene dump trailer has a quick release tipper latch for its 1200 lbs capacity load. It features a rugged polypropylene bed and all-steel durable tilt and pivot frame with a powder coated finish. Sealed ball bearing 'wheels' mean no greasing is required.



DETHATCHER

TINE DETHATCHER LST40

The LST40 is a 102 cm / 40" steel tine dethatcher that used regularly will remove moss and thatch from your lawn to keep it looking its best. It features 20 heat treated steel spring-loaded tines for long life. The whole unit is constructed from steel and features a heavy-duty tray to add weight for extra penetration.



SPREADERS

WALK BEHIND SPREADER LPS125A

The LPS125A is ideal for medium to large areas, which may be difficult to access. The polypropylene hopper can hold up to 125 lbs / 60 ltr and the spreader plate is rust proof ensuring long life. The pneumatic tyres enable this spreader to be easily pushed along the ground and its rain cover ensures materials are kept dry. A rate setting control on the handle helps with precise flow adjustments. As with all our spreaders, it is suitable for both fertiliser, seed and ice melt.



TOW SPREADER LTS125

The LTS125 is ideal for medium to large areas. The polypropylene hopper can hold up to 125 lbs / 60 ltr, whilst the spreader plate is rust proof ensuring long life. The pneumatic tyres ensure this spreader can be easily towed behind most lawn tractors with a tow bar and its rain cover keeps everything dry. The flow lever can be easily operated from the driver's seat and can cover 25,000 sq. ft. suitable for use with both fertiliser, seed and ice melt.



ROLLER

STEEL ROLLER LSR36

The LSR36 heavy duty 92 cm / 36" puncture proof steel roller helps you achieve the traditional green stripe lawn effect as well as packing down new sod, seed and to level your uneven lawn. The easy-fill fitting means you can add water or sand easily to adjust the pressure placed on the ground - use less for soft ground and more for hard ground. It can be towed behind most lawn tractors or ride-on mowers.



AGRI-FAB LAWN TRACTOR PRODUCTS

Agri-Fab® is the largest supplier of tractor accessories in the world. Made in the US. Agri-Fab® lawn tractor products are designed for homeowners who want a beautiful lawn, yet want the job of lawn care to be quick and easy. Agri-Fab's quality and time-saving products will ensure you get the most out of your lawn tractor, making lawn care easy, year after year.

SMARTLINK™ SYSTEM

The Agri-Fab® SmartLINK™ system is an incredibly innovative system which allows different tools to be fitted to the main attachment, saving you space in your shed or garden; and is ideal for fitting on lawn tractors and other ride-on mowers. No tools are required as a simple locking-mechanism holds the tools in place on the master platform so you can switch from one lawn implement to another in seconds.

SMARTLINK™ MASTER PLATFORM 45-0473

SMARTLINK

The Agri-Fab® base is the foundation of the SmartLINK™ lawn-care system. Robust and highly durable, with a welded drawbar and durable heavy-gauge steel deck to ensure a lengthy service-life. It runs on a pair of pneumatic tyres, so rolls smoothly over rough ground; and has a weight tray which can be loaded should added pressure be required when aerating or dethatching.



SMARTLINK™ SPIKE AERATOR 45-0458

SMARTLINK

The tractor-towed spike aerator with 100 super-sharp aeration spikes and a large 104 cm / 41" working-width, achieves thorough soil-penetration across a substantial area and a level of productivity that can't be achieved with a conventional walk-behind aerator.



Once the spikes have done their work, moisture, light, air and nutrients will be able to penetrate the root-network, which in turn will encourage vigorous, healthy grass-growth. The spike aerator is fitted to the master platform via a simple locking-mechanism.

While stocks last

SMARTLINK™ CORE AERATOR 45-0474

SMARTLINK

The tractor-towed core aerator penetrates far more deeply than a surface aerator, ensuring water, air and nutrients reach the whole root system across its large 104 cm / 41" working width, whilst helping with surface drainage. The 20 aeration knives are rust-proof for longevity and the deck is made of heavy gauge steel. The core aerator is fitted to the master platform via a simple locking mechanism.



SMARTLINK™ TINE DETHATCHER 45-0457

SMARTLINK

When moss and thatch build-up on the surface of the lawn, the supply of nutrients and water is cut off, leaving the grass discoloured and unhealthy. The SmartLINK™ tine dethatcher will loosen and lift the offending growth, allowing the turf to breathe again. With a working width of 107 cm / 42", it's equipped with 20 heat treated tines for strength and durability. Weights can be added to the master-platform for increased penetration where conditions suit. The dethatcher is fitted to the master platform via a simple locking mechanism.



WHY USE AN AERATOR?

Aeration is the process of inserting holes in the ground which opens up the soil surface to let grass roots get the air and moisture they need for healthy growth. When undertaken regularly this process will leave you with an enviably lush and green-looking lawn.

SPIKE AERATOR 45-0544

A towed spike aerator for easy and quick coverage of large areas. Designed to achieve excellent soil penetration without leaving soil plugs behind, with a large working width of 102 cm / 40". Its 10 galvanised aeration discs cut into the turf, with the resulting slits allowing fertiliser, air, water, light and nutrients to better penetrate the surface - you'll notice a gradual but marked improvement in grass-condition. The aeration depth can be adjusted by stacking the weight tray. The spikes can be raised to a transport position when moving from lawn to lawn; a foldable hitch makes for easy storage. Supplied with a universal hitch-pin, it can be paired-up with any lawn tractor.



Spike Aerator 45-0544	
Towing Mechanism	Hitchpin and Hole
Working Width	102 cm / 40"
Aeration Depth	Up to 6.5 cm
Blades	10 x Aeration Discs - Galvanised Steel
Weight Tray	Yes
Transport Handle	Yes
Axle	Heavy Duty
Wheels	With Semi-Pneumatic Tyres
Weight	45kg

PLUG AERATOR 45-0299

Thanks to the 140lb weight-tray, this plug aerator is capable of penetrating the toughest soil-types, adjustable up to 8 cm / 3" aeration depth. The heat-treated steel aeration spoons won't buckle or break under heavy loads. It has a generous 122 cm / 48" working width, so you'll be able to cover a lot of ground with each pass. The wide profile pneumatic tyres provide traction and manoeuvrability, while also being gentle on the turf. The aeration spoons can be raised from the driver's seat with a single cantilevered handle. A universal hitch-pin is included.



Plug Aerator 45-0299	
Towing Mechanism	Hitchpin and Hole
Working Width	122 cm / 48"
Aeration Depth	Up to 8 cm
Blades	8 with 32 Hollow Coring-Points
Weight Tray	Yes - Capacity: 80kg / 176lbs
Transport Handle	Yes
Axle	Heavy Duty
Wheels	250mm x 100mm / 10" x 4" - Solid Tyres
Dimensions	L: 89 cm x W: 132 cm x H: 91 cm / L: 35" x W: 52" x H: 36"
Weight	36.5kg

WHY USE A DETHATCHER?

When moss and thatch build up on the surface of the lawn, the supply of nutrients and water to the roots is cut off, leaving the grass discoloured and unhealthy. A dethatcher will loosen and lift off the moss and thatch allowing the grass to breathe again.

SPRING TINE DETHATCHER 45-0294


This dethatcher has a 102 cm / 40" working-width, with 20 heat treated/spring loaded tines, making it possible to cover very large areas. It sits on a pair of flat-free tyres that run smoothly over bumpy ground; and it comes with a universal link-pin, which facilitates use with all makes of ride-on mower. Other benefits include a cantilevered handle, which makes it easy to raise the tines for transport; and a heavy duty weight tray, which can be ballasted when more tine-pressure is required.



Spring Tine Dethatcher 45-0294	
Working Width	102 cm / 40"
Number of Tines	20
Tine Diameter	80 mm / 3"
Weight Tray	Yes - Capacity: 31.5kg / 70lbs
Transport Handle	Yes
Axle	Steel
Wheels	180 mm x 40 mm / 7" x 1.5" - Flat-Free Tyres
Weight	15.5kg

SPRING TINE DETHATCHER 45-0295

A key feature of this dethatcher is its weight tray, which can take up to 70lbs of ballast for more effective thatch removal. It has a large 122 cm / 48" working-width for the fast coverage of large areas. An easy-to-use cantilevered handle allows the tines to be raised for transportation; and flat-free tyres ensure the unit rolls smoothly, even on rough ground. The 24 tines on this model are heat-treated for strength and durability. A universal link-pin is included.

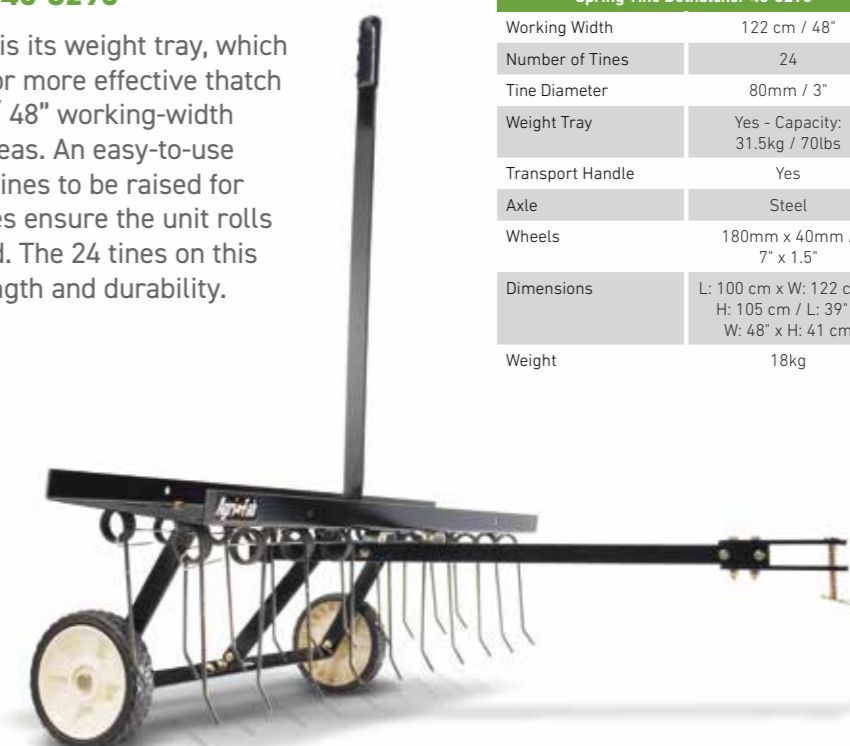

Spring Tine Dethatcher 45-0295	
Working Width	122 cm / 48"
Number of Tines	24
Tine Diameter	80mm / 3"
Weight Tray	Yes - Capacity: 31.5kg / 70lbs
Transport Handle	Yes
Axle	Steel
Wheels	180mm x 40mm / 7" x 1.5"
Dimensions	L: 100 cm x W: 122 cm x H: 105 cm / L: 39" x W: 48" x H: 41 cm
Weight	18kg



WHY USE A SPREADER?

Using a spreader allows you to have the most accurate and even distribution of seeds and fertilisers, getting the job done more efficiently and quickly. Agri-Fab has a variety of tow and push spreaders with a large range of capacities. Most models include pneumatic tyres for easy manoeuvrability on any surface.

PUSH SPREADER 45-0566

This compact push spreader has a 50lb / 23kg capacity rust-proof polypropylene hopper. The built-in deflector and easy-to-use controls helps spread the material evenly every time. 25 cm / 10" polypropylene wheels move over terrain easily and never need air. The fold up kickstand allows for easy storage.



Push Spreader 45-0566	
Hopper Capacity	50lbs / 23kg
Hopper Construction	Polypropylene
Flow Rate Control	Yes - Handlebar-Mounted Lever
Gearing	Single
Wheels	1255mm x 100mm / 10" x 4" Polypropylene Wheels
Ideal for Spreading	Granular Herbicides, Granular Fertilisers
Also Suitable for Spreading	Ice Melt, Seeds, Pellet Fertilisers

TOWED BROADCAST SPREADER 45-0530

This towed broadcast spreader has been built to keep performing season-after-season, with its fully enclosed transmission, tubular-steel frame, and rust-proof polypropylene hopper. This model also features fully pneumatic tyres, which provide traction and manoeuvrability, while ensuring a smooth ride on rough ground. For convenience, the on/off control can be accessed from the driver's seat of your lawn tractor. Thanks to its lightweight design (17lbs) and universal hitch, it is suitable for use with lower-powered lawn-tractors.



Towed Broadcast Spreader 45-0530	
Towing Mechanism	Hitchpin and Hole
Hopper Capacity	85lbs / 39kg
Hopper Construction	Polypropylene
Spreading Width	2.5m-3m / 8ft.-10ft.
Coverage Per Fill (Max.)	1300m ² / 14,000 sq. ft.
Flow Rate Control	Yes
Gearing	Fully Enclosed
Axle	13mm / 0.5"
Wheels	250mm x 100mm / 10" x 4" - with Pneumatic Tyres
Ideal for Spreading	Seeds, Granular Herbicides, Granular Fertilisers, Pellet Fertilisers
Also Suitable for Spreading	Rock Salt, Ice Melt
Weight	8.2kg

DELUXE BROADCAST PUSH SPREADER 45-0531

This push spreader is designed to evenly fertilise your lawn with the nutrients it needs as well as distributing ice melt for clearing drives and pathways in winter. The 85lbs / 39kg capacity polypropylene hopper and spreader plate are rustproof. 10" pneumatic tyres allow for smooth transport over rough terrain.



Deluxe Broadcast Push Spreader 45-0531	
Hopper Capacity	39kg / 85lbs
Hopper Construction	Polypropylene
Spreading Width	2.4m-3.5m / 8ft.-10ft.
Coverage Per Fill (Max.)	Up to 14,000 sq.ft
Flow Rate Control	Yes - Handlebar-Mounted Lever
Gearing	Single
Axle	13mm / 0.5"
Wheels	250mm x 100mm / 10" x 4" - with Pneumatic Tyres
Ideal for Spreading	Granular Herbicides, Granular Fertilisers
Also Suitable for Spreading	Ice Melt, Seeds, Pellet Fertilisers

PRO PUSH SPREADER 45-0532

This push spreader features a direct rod control that opens the slide gate for precise spreading and reliable coverage up to 125 cm / 10" width. The 85lbs / 39kg capacity polypropylene hopper and spreader plate are rustproof. 10" pneumatic tyres allow for smooth transport over rough terrain.



Pro Push Spreader 45-0532	
Hopper Capacity	39kg / 85lbs
Hopper Construction	Polypropylene
Spreading Width	14,000 sq.ft
Flow Rate Control	Yes - Handlebar-Mounted Lever
Gearing	Single
Axle	13mm / 0.5"
Wheels	255mm x 100mm / 10" x 4" - with Pneumatic Tyres
Ideal for Spreading	Granular Herbicides, Granular Fertilisers
Also Suitable for Spreading	Ice Melt, Seeds, Pellet Fertilisers

PUSH BROADCAST SPREADER 45-0462

With an enclosed commercial grade gear box for smooth rolling and easy maintenance, this large spreader is ideal for covering approx. 25,000 sq. ft. Key to the spreader is its professional style control system. Quick and simple use, it allows for precise calibration of the spread-rate, in turn ensuring wastage is kept to a minimum.

It weighs just 37lbs and runs on a set of smooth rolling bearing mounted wheels, so it couldn't be easier to push. Large diameter pneumatic tyres make it highly manoeuvrable and provide plenty of traction on muddy ground.



Push Broadcast Spreader 45-0462	
Hopper Capacity	56kg / 130lbs
Hopper Construction	Polypropylene
Spreading Width	Up to 3.6m / 12'
Coverage Per Fill (Max.)	2325m ² / 25,000 sq.ft. (Approx.)
Flow Rate Control	Yes - Professional
Gearing	Commercial-Duty
Axle	Steel
Wheels	255mm x 100mm / 10" x 4" - Pneumatic Tyres
Ideal for Spreading	Rock Salt, Granular Fertilisers
Also Suitable for Spreading	Granular Herbicides, Ice Melt, Pellet Fertilisers
Weight	16kg

PUSH SPREADER 45-0576

The rustproof polypropylene hopper and spreader plate will increase the product life of this spreader. The large hopper 110lbs / 50kg covers an area of approx. 17,500 sq.ft. Spreader setting recommendations are included for easy use. Pneumatic tyres let you go anywhere to get the job done.



Push Spreader 45-0576	
Hopper Capacity	50kg / 110lbs
Hopper Construction	Polypropylene
Flow Rate Control	Yes - Handlebar-Mounted Lever
Gearing	Single
Axle	13mm / 0.5"
Wheels	255mm x 100mm / 10" x 4" - with Pneumatic Tyres
Ideal for Spreading	Granular Herbicides, Granular Fertilisers
Also Suitable for Spreading	Ice Melt, Seeds, Pellet Fertilisers

PUSH SALT SPREADER 45-0548

This large 56kg/130lb capacity hopper is ideal for covering approx. 25,000 sq.ft and is suitable for spreading dry and free flowing salt. The deflector helps narrow the spread when required and the flow rate can also be adjusted. The large turf tread pneumatic tyres make manoeuvring the spreader an easy task.



Push Salt Spreader 45-0548	
Hopper Capacity	56kg / 130lbs
Hopper Construction	Polypropylene
Spreading Width	Up to 3.6m / 12'
Coverage Per Fill (Max.)	2325m ² / 25,000 sq.ft. (Approx.)
Flow Rate Control	Yes
Gearing	Fully Enclosed
Axle	Steel
Wheels	255mm x 100mm / 10" x 4" - Pneumatic Tyres
Ideal for Spreading	Dry and free flowing salt

TOW BROADCAST SPREADER 45-0527

This towed broadcast spreader will spread everything from fertiliser to seed and ice melt. It features a durable polypropylene hopper, coated components and long lasting stainless steel closure plates which resist corrosion. The positive over-centre flow adjustment ensures accurate calibration.

With a 110lb / 50kg capacity, it is suitable for areas around 17,500 square feet or around one third of an acre. It has a spread width of 8' - 10' and acetal gear drive. The axle is 1/2" in diameter and it has 10" x 4" pneumatic tyres for smooth transport. Fitted with a universal hitch pin it can be towed behind all makes of lawn tractor.



Tow Broadcast Spreader 45-0527	
Towing Mechanism	Hitchpin and Hole
Hopper Capacity	110lbs / 50kg
Hopper Construction	Polypropylene
Flow Rate Control	Yes
Gearing	Fully Enclosed
Axle	13mm / 0.5"
Wheels	250mm x 100mm / 10" x 4" - with Pneumatic Tyres
Ideal for Spreading	Seeds, Granular Herbicides, Granular Fertilisers, Pellet Fertilisers
Also Suitable for Spreading	Ice Melt
Weight	8.2kg

ATV SPREADER 45-0329

This towed broadcast spreader offers robust build-quality and premium components – its steel gearing, rust-resistant hopper and spread-plate and ball-bearing mounted wheels all work to ensure it will stand-up to season after season of intensive use.

Other key features include large pneumatic tyres, that provide plenty of grip without damaging the lawn surface; and a raised on/off control, which can be easily accessed from the driver's seat of your ATV.



ATV Spreader 45-0329	
Towing Mechanism	Hitchpin and Hole
Hopper Capacity	79kg / 175lbs
Hopper Construction	Polypropylene
Spreading Width	3.6m / 12ft.
Coverage Per Fill (Max.)	Up to 3715m ² / 40,000 sq.ft.
Flow Rate Control	Adjustable from ATV Seat
Gearing	Heavy-Duty Steel
Axle	Steel
Wheels	380mm x 150mm / 15" x 6"
Ideal for Spreading	Seeds, Granular Fertilisers, Pellet Fertilisers
Also Suitable for Spreading	Granular Herbicides, Rock Salt

TOW BROADCAST SPREADER 45-0463

The spreader is highly durable, with its fully-enclosed commercial-grade gearbox, tubular steel frame and rust-free polypropylene hopper; all combining to ensure you'll get years of service. With professional style, easy-set controls for precise application and a large 130lb / 56kg hopper capacity it's perfect for areas of approx. 25,000 sq.ft

This model also features large-sized pneumatic tyres for enhanced manoeuvrability and improved traction on difficult ground; and it comes with a universal hitch-pin, so it can be used with any lawn-tractor.



Tow Broadcast Spreader 45-0463	
Towing Mechanism	Hitchpin and Hole
Hopper Capacity	56kg / 130lbs
Hopper Construction	Polypropylene
Spreading Width	Up to 3.6m / 12'
Coverage Per Fill (Max.)	Up to 2325m ² / 25,000 sq.ft. (Approx.)
Flow Rate Control	Yes - Lever
Gearing	Commercial-Duty
Axle	Steel
Wheels	255mm x 100mm / 10" x 4" - Pneumatic Tyres
Ideal for Spreading	Seeds
Also Suitable for Spreading	Ice Melt
Weight	15kg

TOW DROP SPREADER 45-0288

A practical and convenient way to apply grass-seeds, granular fertilisers and herbicides over very large-areas. The distribution of spread-medium is kept within the area between the wheels, so wastage is virtually eliminated and you won't end-up applying material to areas where it's not required.

The large 175lb hopper makes it possible to cover a huge 40,000 sq.ft on one hopper's worth of spread-medium. It has a 42" controlled spread-width.

It is built to last, with its rust-proof polypropylene hopper and galvanised-steel spreader which both contribute to a long product-life. Wide, large-diameter tyres ensure you won't damage the turf when turning, while also aiding manoeuvrability and traction.



Tow Drop Spreader 45-0288	
Towing Mechanism	Hitchpin and Hole
Hopper Capacity	77 Litres / 17 Gallons / 79kg / 175lbs
Hopper Construction	Polypropylene
Spreading Width	105 cm
Coverage Per Fill (Max.)	Up to 3715m ² / 40,000 sq.ft. (Approx.)
Flow Rate Control	Lever - Adjustable from Driving-Seat
Axle	Steel
Wheels	with Pneumatic Tyres
Ideal for Spreading	Seeds, Granular Herbicides, Granular Fertilisers
Also Suitable for Spreading	Ice Melt
Weight	21kg

PUSH ICE MELT SPREADER 45-0575

This spreader is the perfect size for pavements and smaller applications. With a welded steel tubular frame and a rustproof polypropylene hopper, this spreader will stand up to a long product-life. The direct rod control opens the slide gate with precision for reliable coverage.

Push Ice Melt Spreader 45-0575	
Hopper Capacity	38kg / 85lbs
Hopper Construction	Polypropylene
Flow Rate Control	Yes
Handlebar-Mounted	Lever
Wheels	255mm x 100mm / 10" x 4" with Pneumatic Tyres
Ideal for Spreading	Ice Melt



WHY USE A SWEEPER?

Using a lawn sweeper to clear away leaves, grass clippings and garden debris is quicker and easier on you and your lawn than using a rake.

PUSH LAWN SWEEPER 45-0218

Thanks to its infinitely-variable sweep-height, this push sweeper can be set-up to suit the surface – the brushes can be raised when working on gravel drives and lawns; and lowered for more brushing power on hard surfaces. It comes with a very large-capacity 200-litre debris bag, so you'll be able to get plenty done (the debris-bag is collapsible for more compact storage). This model also features 10" x 1.75" semi-pneumatic tyres, a steel handle, 4 replaceable brushes and a working width of 26" / 66 cm. It will clear debris 50% faster than a garden rake.



Push Lawn Sweeper 45-0218	
Sweeping Width	66 cm / 26"
Brush Diameter	25 cm / 10"
Hopper Capacity	6.2 cu. ft
Height Adjustment	Yes
Wheels	25 cm x 4 cm / 10" x 1.75"
Surface Types	Lawns and Hard Surfaces

TOW LAWN SWEEPER 45-0320

With a sweeper width of 42" / 107 cm this tow lawn sweeper with a 340 litre debris-bag will clear debris quickly. The unique design provides more traction on the sweeper wheels for greater debris pick up. The stamped steel housing provides durability to withstand season after season of use.



Tow Lawn Sweeper 45-0320	
Towing Mechanism	Hitchpin and Hole
Sweeping Width	107 cm / 42"
Hopper Capacity	12 cu. ft
Height Adjustment	Yes
Housing	Stamped Steel
Wheels	28 cm x 6.3 cm / 11" x 2.5" semi-pneumatic
Surface Types	Lawns and Hard Surfaces

TOW SMART SWEEPER 45-0492

This sweeper is a fast and efficient performer over very large areas – up to 8000m². It's supplied with a huge debris-bag (700 litres), which keeps emptying-stops to a minimum and can be collapsed to save space in your storage area. The bag can be emptied from the seat of your tractor. Another key benefit is its offset hitch, which allows you to simultaneously cut and sweep, while also making it easier to work alongside obstacles. Flexibility of use is further enhanced thanks to an adjustable brush-height, which is quick-and-easy to set using a single button.



Tow Smart Sweeper 45-0492	
Towing Mechanism	Hitchpin and Hole
Sweeping Width	112 cm / 44"
Brush Diameter	25 cm / 10"
Hopper Capacity	25 cu. ft
Height Adjustment	Yes
Wheels	30.5 cm x 7.6 cm / 12" x 3"
Surface Types	Lawns and Hard Surfaces
Suitable for Areas Up To	8000 m ²

TOW LAWN SWEEPER 45-0546

Agri-Fab's largest towed sweeper will enable you to remove grass-clippings, pine-cones, twigs, leaves and other debris from large lawns and lengthy driveways quickly and easily. It combines a massive 708-litre debris-bag with an extra-substantial 132 cm working-width. It runs on high-traction semi-pneumatic tyres that ensures effective operation in typically damp British conditions.

Thanks to its high-torque gearing and heavy-duty adjustable brushes, it guarantees a comprehensive pick-up whatever the surface- or debris-type. Bag dumping from your lawn tractor seat makes life easier for you. A rugged stamped-steel housing provides robust impact-resistance and means you'll get season after season of great performance from your lawn sweeper.



Tow Lawn Sweeper 45-0546	
Towing Mechanism	Hitchpin and Hole
Sweeping Width	132 cm / 4.2ft.
Brush Diameter	30.5 cm / 52"
Hopper Capacity	25 cu. ft
Height Adjustment	Yes
Housing	Stamped Steel
Wheels	28 cm x 6.3 cm / 11" x 2.5" semi-pneumatic
Surface Types	Lawns and Hard Surfaces
Suitable for Areas Up To	10,000 m ²

WHY USE A ROLLER?

Tow behind rollers are ideal whether you're looking to bed-in freshly laid turf, level-out mole hills, flatten frost-heaves or pack-down newly sown seed.

TOW ROLLER 45-0268

This tow roller weighs an impressive 400lbs when fully water ballasted, and just 47lbs when empty, making it easy to move to and from the shed or garage and suitable for levelling and sod packing. It's supplied with a fill-plug that's quick and easy to remove; and a universal link-pin, for linking up to your lawn tractor. The polypropylene construction makes for rust proof durability. Rounded roller edges prevent damage to the lawn surface.

White stocks last



Tow Roller 45-0268	
Working Width	92 cm / 36"
Drum Diameter	46 cm / 18"
Drum Material	Polypropylene
Fill Plug	Yes
Weight with Water	181kg / 400lbs
Weight Empty	21kg / 46.3lbs

PUSH / TOW ROLLER 45-0267

The Push / Tow Lawn & Garden Roller weighs just 40lbs when unballasted (251lbs when the drum is full of water), making it easy to transport and store. It comes with a removable fill-plug that doesn't require tools for removal; and a universal link-pin, for linking up to your lawn tractor. The polypropylene construction makes for rust proof durability. Rounded roller edges prevent damage to the lawn surface.



Push / Tow Roller 45-0267	
Working Width	60 cm / 24"
Drum Diameter	46 cm / 18"
Drum Material	Polypropylene
Fill Plug	Yes
Weight with Water	114kg / 251lbs
Weight Empty	18kg / 40lbs

TOW ROLLER 45-0606

This tow roller has a 400lb capacity when filled with water. It's supplied with a roller drain/fill plug so that it empties easily and can be filled using a standard garden hose. The hitch tubes knock off clumps of soil, preventing them from being compacted on the roller drum. The polypropylene construction makes for rustproof durability. It's supplied with a universal link-pin for linking up to your lawn tractor.



Tow Roller 45-0606	
Working Width	92 cm / 36"
Drum Diameter	46 cm / 18"
Drum Material	Polypropylene
Fill Plug	Yes
Weight with Water	181kg / 400lbs

TOW ROLLER 45-0604

This tow roller has a 550lb capacity when filled with water. It's supplied with a roller drain/fill plug so that it empties easily and can be filled using a standard garden hose. The hitch tubes knock off clumps of soil, preventing them from being compacted on the roller drum. The polypropylene construction makes for rustproof durability. It's supplied with a universal link-pin for linking up to your lawn tractor.



Tow Roller 45-0604	
Working Width	122 cm / 48"
Drum Diameter	46 cm / 18"
Drum Material	Polypropylene
Fill Plug	Yes
Weight with Water	250kg / 550lbs

STEEL LAWN ROLLER 45-0216

With a welded seam steel construction for strength and durability this wide lawn roller has a large drum capacity of 910lbs/412kg. It also comes with a scraper bar to prevent clumps of soil from being compacted on the roller drum and a universal hitch-pin for linking up with your lawn tractor.



Steel Lawn Roller 45-0216	
Working Width	122 cm / 48"
Drum Diameter	60 cm / 24"
Drum Material	Steel
Fill Plug	Yes
Weight with Water	412kg / 910lbs
Weight Empty	52kg / 114lbs

WHY USE A SPRAYER?

Liquid fertilisers, herbicides and pesticides are convenient and effective for large lawn applications. Agri-Fab sprayers are available in three sizes: 15-gallon, 25-gallon, and 45-gallon. Both models include a hand wand for targeted spraying around trees and bushes, smooth rolling wheels for easy manoeuvrability and are compatible with lawn tractors from any manufacturer.

TOW SPRAYER 45-0587

This sprayer will give you the opportunity to use either the boom spray to cover a large area or the ability to use the spot sprayer for precision applications.

Agri-Fab versatile 15 Gallon Tow Behind Sprayer's 100 psi, 2.2 GPM diaphragm pump is designed for maximum efficiency to provide high hour application. This sprayer also comes with check valves in the boom tips to prevent siphoning and dripping which could lead to lawn spotting.



Tow Sprayer 45-0587	
Towing Mechanism	Hitchpin and Hole
Tank Capacity	68 Litres / 15 Gallons
Spray Width	Up to 152 cm / 60"
Spray Pressure	100psi
Wheels	10" pneumatic

TOW SPRAYER 45-0588

This versatile 25 Gallon Tow Behind Sprayer will give you the opportunity to use either the boom spray to cover a large area or the ability to use the spot sprayer for precision applications.

The 100 psi, 2.2 GPM diaphragm pump is designed for maximum efficiency to provide high hour application. This sprayer also comes with check valves in the boom tips to prevent siphoning and dripping which could lead to lawn spotting.



Tow Sprayer 45-0588	
Towing Mechanism	Hitchpin and Hole
Tank Capacity	114 Litres / 25 Gallons
Spray Width	Up to 152 cm / 60"
Spray Pressure	100psi
Wheels	10" pneumatic

TOW SPRAYER 45-0589

A heavy-duty, commercial-grade unit, this sprayer features a corrosion- and weather-proof polypropylene tank with a large capacity of 45 gallons, allowing you to treat large areas quickly with its 228 cm / 90" spray width. The tank has level-markers for the accurate mixing of chemicals and water; and there's a drain for easy flushing. The inclusion of ample wiring ensures you'll have no trouble hooking it up to your tractor battery. A handy on/off control stops the battery draining when the sprayer is connected but not in use.

Tow Sprayer 45-0589	
Towing Mechanism	Hitchpin and Hole
Tank Capacity	205 Litres / 45 Gallons
Spray Width	Up to 228 cm / 90"
Spray Pressure	100psi
Spray Lance	Yes - with 5.8m / 19ft. Hose
Pump	Remco 2.2 GPM



WIRELESS REMOTE CONTROL KIT 45-0580

This 12V / 15amps wireless remote control kit comes with 2 remote fobs and is compatible with the 45-0589 Agri-Fab electric sprayer that has a 2 wire moulded connector and does not exceed 12V / 15amps, so you can control your sprayer with ease.



WHY USE A TRAILER?

All Agri-Fab trailers are built to last and made to efficiently and easily carry the load. They are practical and sturdy with pneumatic tyres for easy manoeuvrability on any surface. All the trailers are supplied with a universal hitch-pin, compatible with all makes of lawn tractors.

ATV SWIVEL TRAILER 45-0579

The swivel feature on this trailer, up to 100°, and quick release lever allow for easy emptying exactly where you want it. The trailer also tips up to a 56° angle. The all terrain pneumatic tyres allow for easy manoeuvrability of the 1000lb large load capacity over the roughest ground. The trailer is supplied with a universal hitch pin which can be attached to most lawn tractors.



ATV Swivel Trailer 45-0579	
Bed Design	Polypropylene
Tipping	Yes
Tipping Mechanism	Latch system
Dump Angle	56°
Frame	1" square tubing
Tyres	Pneumatic
Wheel Size	18" x 8.5"
Dimensions	L: 208 cm x W: 124 cm x H: 84 cm
Weight	53kg / 117lbs

FOUR WHEEL GARDEN TRAILER 45-0594

The Agri-Fab 45-0594 (500lb/4-Wheel Poly Garden Pull/Tow Dump Trailer) will easily help you transport plants, dirt, sand, gravel, mulch, and much more. This easy-to-use trailer, is an excellent alternative to a wheel barrow and if it gets loaded too heavy to pull simply convert from pull to tow in seconds and let a garden tractor do all the heavy pulling for you.

This trailer comes with a sturdy 45" x 31.3" x 10.75" polypropylene bed and is capable of towing up to 500lb. loads time and time again. The 45-0594 cart is also equipped with 13-Inch x 4-Inch Pneumatic knobby tyres which give you easy manoeuvrability over the roughest terrain. There is an ergonomic heavy-duty latch system to make this trailer easy to dump with a 90° dump angle for easy clearing of the bed.

Four Wheel Garden Trailer 45-0594	
Load Capacity	227kg / 500lbs
Bed Design	Polypropylene
Wheels	13" x 4"
Weight	31kg / 69lbs



TOW UTILITY DUMP TRAILER 45-0303

With its large load-capacity (350lbs) and high-sided design, this trailer is ideal for the transportation of heavy and/or bulky loads around the garden. The single lever release dump mechanism and removable tailgate make for easy unloading.

Built to give year upon year of unflinching service, it's equipped with a heavy-duty steel tipper bed that has a rust-resistant powder-coated paint finish, a robust 5/8" axle and a pair of large diameter pneumatic tyres for easier turning on difficult terrain and a smooth ride generally.

The wide stance and low centre of gravity makes it stable on rough ground. The universal pin means it can be attached to any lawn tractor.



Tow Utility Dump Trailer 45-0303	
Load Capacity	159kg / 350lbs
Body Material	Steel with Powder-Coated Finish
Tipping Mechanism	Yes
Chassis	Dichromate Steel
Axle Diameter	5/8"
Wheels	13" x 4"
Dimensions	L: 124 cm x W: 82 cm x H: 30 cm / L: 49" x W: 32" x H: 12"
Weight	30kg / 68lbs

STEEL TIPPING TRAILER 45-0101

The Agri-Fab 45-0101 steel tipping trailer is supplied with a universal hitch-pin, so it's compatible with all makes of lawn tractors. With a removable tailgate and single lever release dump mechanism for easier tipping and with a set of 16" x 4" ribbed pneumatic tyres for a smooth ride and a 5/8" diameter axle for strong support. Additional benefits include a scratch resistant, powder-coated finish for longevity; and grease nipples, which make it easy to keep the wheel-bearings lubricated.

Steel Tipping Trailer 45-0101	
Load Capacity	340kg / 750lbs
Load Volume	3.6m ³
Dimensions of Body	L: 117 cm x W: 79 cm x H: 30.5 cm / L: 46" x W: 30" x H: 12"
Body Material	Steel with Powder-Coated Finish
Tipping Mechanism	Yes
Chassis	Steel
Axle Diameter	15 cm
Wheels	14" x 4"
Weight	102lbs / 46kg



TOW TRAILER 45-0533

This tipping trailer has a large 650lbs / 295kg load capacity so you can unload and dump heavy materials in one easy trailer motion using the foot pedal. The durable coating on this trailer makes cleaning up a breeze. With a quick and easy assembly, you'll be set up in no time.

Tow Trailer 45-0533	
Load Capacity	295kg / 650lb
Load Volume	10 cu. ft
Construction	Polypropylene
Tipping	Yes
Tipping Mechanism	Foot pedal release
Tyres	Pneumatic
Wheel Size	16" x 4"
Weight	56.5lbs / 26kg



UTILITY POLYPROPYLENE TRAILER 45-0552

The 45-0552 towed trailer has a considerable 700lb / 12 cu. ft heaped load capacity and is supplied with a universal hitch pin which can be attached to most lawn tractors.

The robust bed sits on a heavy-duty welded frame which has 1" square tubing, whilst the pneumatic turf tread tyres roll smoothly over uneven ground.

The Agri-Fab 45-0552 has a 12" ground clearance and features a latch system to easily dump the bed contents. Not only does the trailer tip to a 52° angle, the cart also swivels up to 110° so you can empty the load exactly where you want it.

Utility Polypropylene Trailer 45-0552	
Bed Design	Polypropylene
Tipping	Yes
Tipping Mechanism	Latch system
Dump Angle	52°
Frame	1" square tubing
Tyres	Pneumatic
Wheel Size	15" x 6"
Dimensions	L: 167.1 cm x W: 88.6 cm x H: 68.3 cm
Weight	80lbs / 36kg



UTILITY POLYPROPYLENE SWIVEL TRAILER 45-0553

The 45-0553 towed garden cart has a substantial 1000lb / 18 cu. ft heaped load capacity and is supplied with a universal hitch pin which can be attached to most tractor drawbars.

The robust bed sits on a heavy-duty welded frame which has 1" square tubing, whilst the large 16" pneumatic turf tread tyres with powdered metal bearings allow for easy manoeuvrability over rough terrain.

The Agri-Fab 45-0553 features a latch system to easily dump the bed contents. Not only does the trailer tip at a 52° dump angle, the cart also swivels up to 110° so you can empty the load exactly where you want it.



Utility Polypropylene Swivel Trailer 45-0553	
Bed Design	Polypropylene
Tipping	Yes
Tipping Mechanism	Latch system
Dump Angle	52°
Frame	1" square tubing
Tow Hitch	Clevis
Tyres	Pneumatic
Wheel Size	16.0" x 6.5"
Dimensions	L: 189.4 cm x W: 105.5 cm x H: 81 cm
Weight	95lbs / 43kg



SCARIFIERS

WHY SCARIFY?

Twice a year, ideally a dry day in spring or autumn, you should free your lawn from moss so it can breathe again. The moss layer is a breeding ground for fungi, it binds moisture and inhibits powerful root growth of your lawn. Lawnflite has a selection of scarifiers, which will fulfil your needs.

PETROL SCARIFIERS

With our petrol scarifiers you have a machine with 15 or 16 blades. The working depth can be selected by adjusting a lever mounted on the handle, ensuring you select the correct setting for light scarification, or heavier verticutter applications without requiring the use of tools.

Fixed tines made of special hardened steel are effective at scarifying while the large rear mounted collector catches the raked-out material, making this a one pass operation.



KEY BENEFITS

- 1 Scarifier shaft with fixed double tines for efficient results
- 2 Additional dethatcher shaft included
- 3 Grass bag included
- 4 Central tine adjustment
- 5 Fully foldable ergo handle
- 6 Remote transport position lever



2 YEARS WARRANTY*

*2 years for domestic providing the machine is serviced by the supplying dealer.

MODELS AVAILABLE



Model	OPTIMA 38V0
Working width	38 cm / 15"
Engine	MTD ThorX 55 H / 179 cc
Rated power (kW / min ⁻¹)	3.0 / 3,500
Deck material	Steel
Tines	16, 190 mm diameter
Tine adjustment	0 to -15 mm
Tine shaft depth adjustment	6 positions, central
Deflector / Aerator shaft	Standard
Grass catcher	50 ltr
Wheels (f/r)	200 mm / 200 mm
Handle	Ergo handle, fully foldable
Measurements (approx.)	L 34 / W 58 / H 114 cm
Weight (approx.)	39 kg
LpA/LwA/LwAg (dB)	87 / 98 / 100

Both electric and petrol models come standard with scarifier and aerator shaft.






Model	OPTIMA 35VO
Working width	35 cm / 14"
Engine	MTD ThorX 35 H / 123 cc
Rated power (kW / min ⁻¹)	2.3 / 3,500
Deck material	Steel
Tines	15, 190 mm diameter
Tine adjustment	0 to -15 mm
Tine shaft depth adjustment	6 positions, central
Deflector / Aerator shaft	Standard
Grass bag	45 ltr
Wheels (f/r)	200 mm / 200 mm
Handle	Ergo handle, fully foldable
Measurements (approx.)	L 34 / W 58 / H 114 cm
Weight (approx.)	37 kg
LpA/LwA/LwAg (dB)	86 / 98 / 100

ELECTRIC SCARIFIER

The powerful electric scarifier is lightweight and efficient. An ideal solution for small and medium sized lawns, it comes with a grass bag and is designed for intuitive handling. The fixed tines take up moss and thatch with ease leaving a healthy lawn ready for growth.

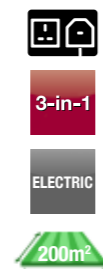

Model	SMART 30VE
Working width	30 cm / 12"
Engine	1,200 W / 230 V electric motor
Deck material	Polypropylene
Tines	10 double, 145 mm diameter
Tine adjustment	0 to -12 mm
Tine shaft depth adjustment	5 positions, central
Deflector shaft	Standard
Grass bag	35 ltr
Wheels (f/r)	200 mm / 110 mm
Handle	Straight, foldable
Cable guide	Standard
Measurements (approx.)	L 89 / W 58 / H 100 cm
Weight (approx.)	11 kg
LpA/LwA/LwAg (dB)	86 / 97 / 99

SCARIFIER ACCESSORIES	CODE
BLADE SHAFT FOR 35 CM SCARIFIER	196-282-600
BLADE SHAFT FOR 38 CM SCARIFIER	196-283-600
SPRING SHAFT FOR 30 CM SCARIFIER	196-284-600
SPRING SHAFT FOR 34/37 CM SCARIFIER	196-285-600
SPRING SHAFT FOR 35/38 CM SCARIFIER	196-286-600

2 YEARS WARRANTY*

*2 years for domestic providing the machine is serviced by the supplying dealer.



WHEELED TRIMMER

When the mowing gets rough, you need a machine that meets the tough demands of rough grass where unknown debris may be lurking.

The HWLT wheeled trimmer with its dual line cutting system, large wheels, adjustable handle system, will wade through the rough areas.

The Lawnflite HWLT wheeled trimmer mower is petrol-driven by a powerful 5.5hp Lawnflite engine. Featuring a 56 cm (22") wide cutting path, it is equipped with a sturdy dual line system which is adjustable between 1.5" and 3" for all cutting height requirements.

Safety is ensured thanks to the line engagement lever, whilst the easily adjustable handle system maximises operator comfort and reduces fatigue while in use. The large 14" wheels make this machine highly manoeuvrable, even on rough, undulating and overgrown, neglected areas.

KEY BENEFITS

- 1 Powerful Lawnflite engine
- 2 Dual line system
- 3 Adjustable handle
- 4 Large wheels
- 5 Blade engagement safety control

Model	HWLT
Engine	Lawnflite OHV 160 cc, 5.5hp
Cutting width	56 cm / 22"
Cutting height	3.8 cm / 1.5" - 7.6 cm / 3"
Wheel	35 cm / 14"
Handle	Adjustable
Clutch system	Standard
Weight (approx.)	36 kg

2 YEARS WARRANTY*

*2 years for domestic providing the machine is serviced by the supplying dealer.





LOG SPLITTERS

Log splitters offer a safe and effort-free alternative to chopping up wood with a traditional axe.

Lawnflite offers a range of high quality electric logsplitters. For use in sensitive areas where noise will cause a problem we have electric models with a splitting force of up to 8 tonne. All Lawnflite log splitters are fitted with wheels for transportation and are operated by a 2-handed control system to ensure safe working practice.

Please note - if splitting particularly hard wood, the maximum log size stated may not be applicable.

The LS52200EH-KIT and LS72300EH-KIT must be used with a stand due to new safety legislation. The stand comes as standard with both machines.

KEY BENEFITS

- 1 Electric log splitters are quiet and effective
- 2 Splitting force from 5 to 8 tonnes
- 3 Two handed control systems ensure a safe working practice
- 4 Wheels for easy transportation
- 5 Comfortable hand-grips for easier working

MODELS AVAILABLE



ELECTRIC

Model	LS52200EH-KIT	LS72300EH-KIT	LS83000EV
Engine	230 volt 2200 watt	230 volt 2300 watt	230 volt 3000 watt
Splitting force	5 tonne	7 tonne	8 tonne
Log diameter	25 cm / 10"	25 cm / 10"	30 cm / 12"
Log length	52 cm / 20"	52 cm / 20"	55 cm / 21"
Weight	55 kg	60 kg	110kg
Stand	Standard	Standard	N/A
Wheels	Standard	Standard	Standard

2 YEARS WARRANTY*

*2 years for domestic providing the machine is serviced by the supplying dealer.



MANTIS - EXPECT BIG THINGS

Mantis tillers and cultivators are designed for performance and power. Mantis introduced the first small tiller nearly 40 years ago and remain at the forefront in providing big results from a mini tiller. The range will help you grow great gardens and keep lawns looking their best. Trusted by over 2 million gardeners they are the best selling small tillers ever. A full range of attachments including border edger, plough, aerator and planter furrower are also available.

WHY CHOOSE A MANTIS TILLER?

The lightest and most powerful tiller in the world. Small but powerful, the Mantis tiller will surprise you with its performance. Thanks to its unique curved tines, it defies roots and stones, reduces clods and turns the soil to create great planting conditions.

FAST AND EASY TO USE

With the Mantis tiller you will save a lot of time in the garden. Plus, it's easy to start and with all of the controls at your fingertips, is easy to use.

EASY TO HANDLE AND POWERFUL

That's the magic of a Mantis. A compact size that works in the tightest spaces, a light weight tiller that is easy on your arms and back and a 40-year reputation for quality and efficiency.

VERSATILE

A Mantis tiller is several tools in one: it digs, hoes and weeds. With the optional attachments, it also breaks up the ground, digs furrows and holes, helps take care of the lawn edges, borders and paths.

DESIGNED TO LAST

A Mantis is a long-term investment.

MANTIS 4-CYCLE LIGHTWEIGHT TILLERS

KEY BENEFITS

- 1 Worm Gear Transmission**
Produces smooth, reliable power delivery with no mechanical efficiency loss
- 2 Tine Geometry**
Specially designed tines maximise digging power, creating the ideal soil for root and plant health
- 3 Engine-Over-Tine Design**
Optimises weight placement for better digging power and less stress on the operator

MODELS AVAILABLE

Model	7263 CLASSIC
Tilling width	23 cm / 9"
Engine	Honda 4 cycle, 25 cc
Speed	Variable throttle
Handle	Sure grip
Kick stand	Included
Weight (approx.)	11 kg


Model	7265 DELUXE
Tilling width	23 cm / 9"
Engine	Honda 4 cycle, 25 cc
Speed	Variable throttle
Handle	Comfort grips height – adjustable handle
Kick stand	Included
Weight (approx.)	11 kg
Engine guard and handle	Standard



VERSATILE
MORE THAN
JUST A TILLER



DURABLE
2-YEAR
WARRANTY

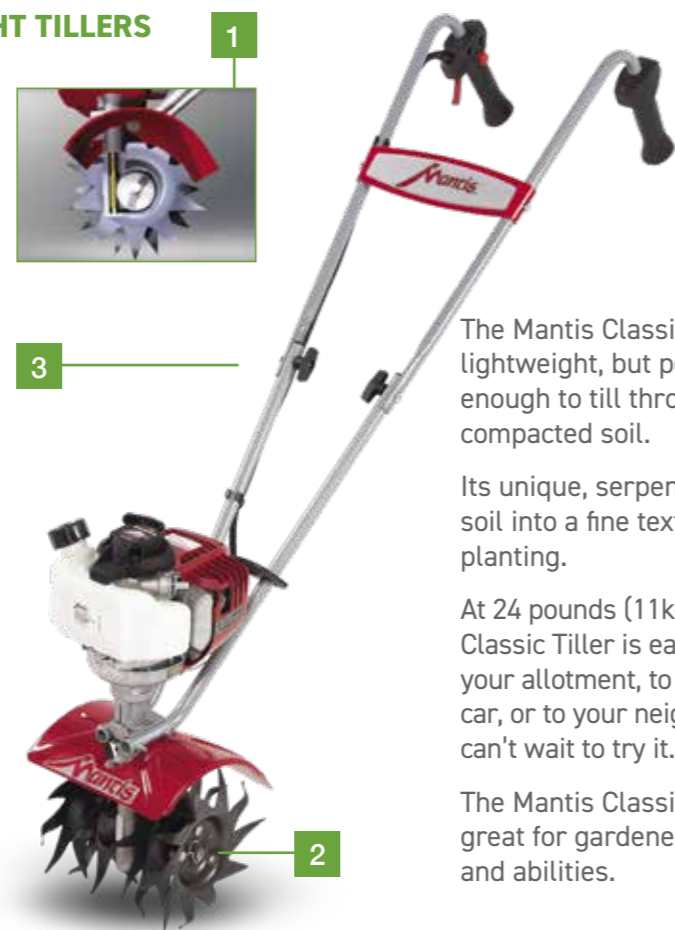

The Mantis Classic Tiller is lightweight, but powerful enough to till through sod and compacted soil.

Its unique, serpentine tines turn soil into a fine texture, ready for planting.

At 24 pounds (11kg) the Mantis Classic Tiller is easy to carry to your allotment, to the shed, the car, or to your neighbour who can't wait to try it.

The Mantis Classic Tiller is great for gardeners of all ages and abilities.



The Mantis Tiller Deluxe features comfort grip handles that are easy on your hands.

Height-adjustable handles let you choose the height most comfortable for you. A conveniently placed on/off switch makes starting and stopping the tiller simple. The front and rear carrying handles make it convenient to lift and transport the tiller.

Featuring our serpentine tines that easily break new ground when digging your home garden or allotment. You can add optional attachments for ploughing the soil, dethatching your lawn and more.

MANTIS ELECTRIC TILLERS AND CULTIVATOR

MODELS AVAILABLE

Weighing only 21 lbs / 9.5 kg, the incredibly powerful but lightweight Mantis Electric Tiller tills even the hardest of soils. The secret is the Mantis serpentine tines.

Use the Mantis Electric Tiller to easily break new ground when you're ready to start your garden. Once your garden is established, use the Mantis Electric Tiller to cultivate and weed.



Model	7252 ELECTRIC TILLER
Tiller width	23 cm / 9"
Motor	780w electric
Start	Push button
Speed	3 speed throttle
Emissions	ECO-friendly
Weight (approx.)	9.5 kg
Kickstand	Included

The Mantis Electric Cultivator runs so quietly you won't disturb the neighbours. Simply plug it in, push the button and start cultivating. The Mantis Electric Cultivator is an excellent garden power tool for handling the hard work of garden preparation.

This small rotovator is powered by a clean, efficient electric motor.

Refresh or renovate existing garden beds or break ground for planting new ones. The compact size works in any size garden.

Weighing only 24 pounds / 11 kilograms so you can easily lift it into raised beds. Includes 3-position wheels.



Model	3450 ELECTRIC CULTIVATOR
Tiller width	30 cm / 12"
Motor	1000w electric
Start	Push button
Speed	2 speed
Emissions	ECO-friendly
Weight (approx.)	11 kg

The Mantis 58V Cordless Cultivator is the first battery-powered rotovator unit worthy to be called a Mantis.

The Mantis Cordless Cultivator starts instantly, runs quietly, with all the power you need to dig up existing garden beds or break ground for planting new ones.

Runs up to 30 minutes on a full charge. Weighs only 26 pounds / 12 kilograms. Easy to lift into raised beds. Includes wheels for easy transport and depth-management.

Includes battery and charger.



Model	3458-02 BATTERY CORDLESS CULTIVATOR
Tiller width	30 cm / 12"
Engine	58 volt Lithium-Ion battery
Start	Push button
Charging Time	90 minutes

PLOUGH ATTACHMENT (3333)

The plough attachment makes deeper furrows and higher mounds. This attachment helps you create ideal deep planted growing conditions for your potatoes, leeks, etc.

Like a plough, set the furrower to the required depth, allow the tiller to move forward and the plough blade creates a wide furrow. This action can also be used to earth up around rows of potato plants.

The plough blade can be adjusted to any of the 5 height settings very easily, by removing a clevis pin, moving the blade and then re-inserting the pin. The depth of the furrows can therefore be easily controlled, from shallow rows to deep furrows. It is attached to the Mantis tiller in addition to the standard tiller tines and will plough the earth up to 18 -20" / 45-50 cm wide.



AERATOR ATTACHMENT (4222)

The Mantis lawn aerator cuts thousands of tiny slits in your lawn, encouraging beneficial micro-organisms in the soil. It is the single most important measure for a healthy, green lawn. The lawn aerator allows oxygen, nutrients and water to penetrate to the soil below. The grass roots can grow down deeper, making your lawn more resistant to hot, dry spells.

Not suitable for the Mantis Deluxe XP Tiller.




DETHATCHER ATTACHMENT (5222)

This dethatcher quickly removes weeds, dead grass, moss and the thatch that can choke your lawn. The 60 spring-steel picks let you dethatch a 15" / 38 cm area with a single pass eliminating hours of back-breaking work. Thatch harbours insects, creates a water barrier, and prevents new grass from growing. Dethatch your lawn regularly, especially before feeding and fertilising. Not suitable for the Mantis Deluxe XP Tiller.



MANTIS TILLER ATTACHMENTS

THESE ATTACHMENTS ARE FOR THE MANTIS TILLERS ONLY

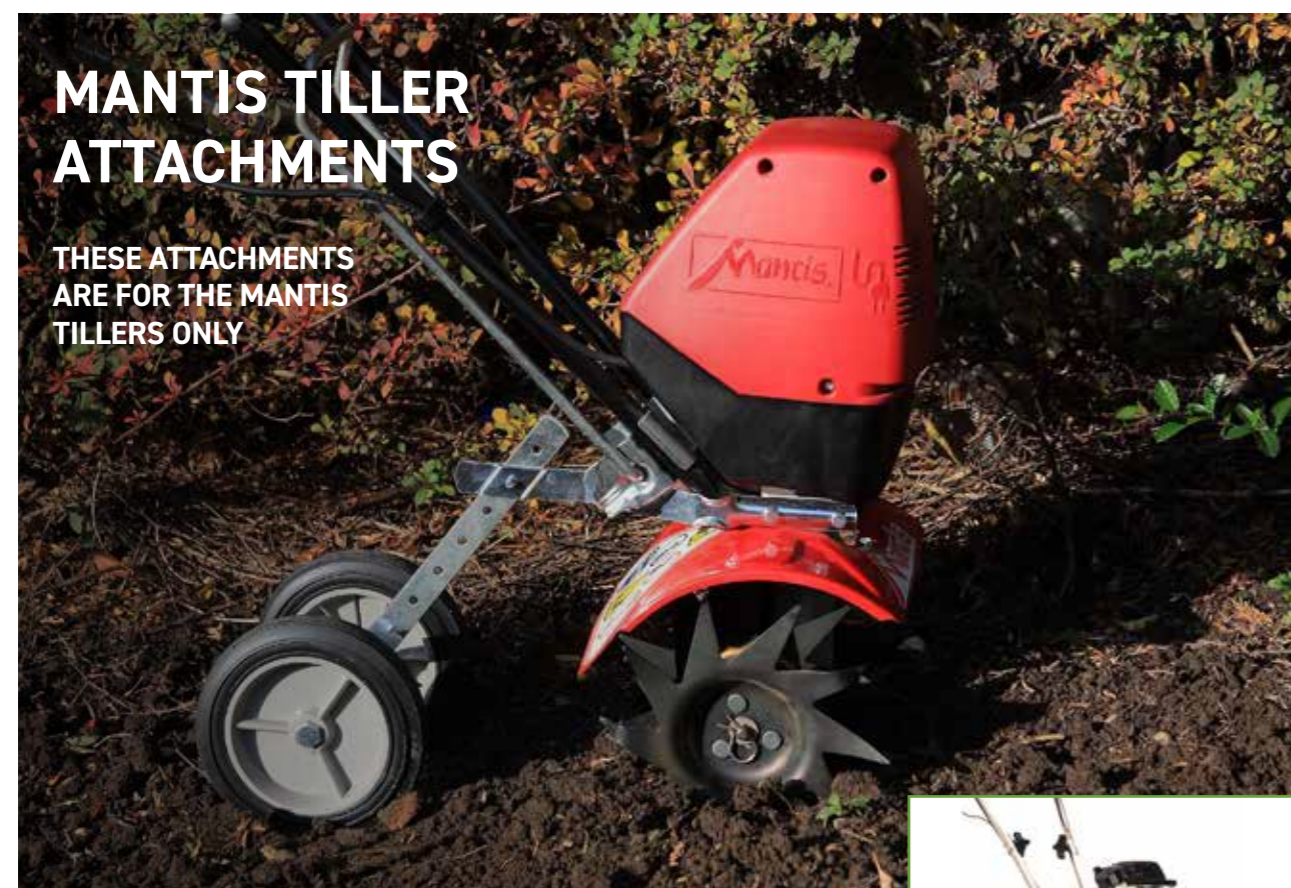

BORDER EDGE ATTACHMENT (3222)

The Mantis border edger attachment makes it easy to beautify your property with sharp, clean edges around paths, flower beds and bushes where they meet your lawn and gardens. The wheel and hardened spring-steel blade attaches easily to your tiller. Can be used with the wheel kit (9222). Not suitable for the Mantis Deluxe XP Tiller.

PLANTER FURROWER ATTACHMENT (6222)

Two special tines dig deep 6" wide furrows, perfect for tomato plants and corn, beans, potato eyes, asparagus roots, onion sets, and flower bulbs. You get drought-resistant root growth and excellent yields from root crops. Great for tilling in narrow areas. Saves time and energy in the garden.

The Mantis tiller planter attachment is also perfect for creating raised beds, cutting trenches for underground irrigation hoses, or low-voltage accent and patio lighting.



LAWN CARE ACCESSORY COMBO (7321)

If you are interested in the aerator and dethatcher then go for this combo. It includes a lawn dethatcher and a lawn aerator attachment. The dethatcher quickly removes weeds, dead grass, moss, and the built-up thatch that can choke your lawn. The 60 spring-steel picks let you dethatch a 15" / 38 cm swath with a single pass. Eliminate hours of back-breaking work.

The lawn aerator cuts thousands of tiny slits in your lawn, encouraging beneficial micro-organisms in the soil. It is the single most important measure for a healthy, green lawn. Not suitable for the Mantis Deluxe XP Tiller.



CREVICE CLEANER ATTACHMENT (8222)

The Mantis crevice cleaner attachment removes dirt and debris from cracks and other hard-to-reach places, thanks to 38 tough steel bristle brushes fixed around a sturdy 3/4" wide wheel. Saves hours of time and backbreaking work. Quickly cuts through weeds, dirt, and debris. Easy to use, it fits on either axle. Comes complete with balancing wheel, a fender and a pair of protective goggles to protect your eyes from projectiles. It can be used with the optional wheel set. Not suitable for the XP Mantis Deluxe Tiller.



MANTIS TILLER ACCESSORIES

TILLER TINE SET (1622)

A pair of replacement tines for your Mantis tiller. The exclusive and patented design of the serpentine tines can penetrate even the hardest soils – even clay – and efficiently reduce clumps of earth. Moreover, the tines are reversible for light weeding.



TINE DETANGLER (1322)

The specially shaped hook is designed for removing stones, tangled weeds and roots from around your tiller tines quickly and safely. Ergonomically shaped with a comfortable rubber grip and 11" / 28 cm long. A useful tool to help you with your Mantis tiller.



WEED REDUCERS (1722)

The pair of weed reducers help reduce the number of stringy weeds and vines that wrap around the tine shaft of the transmission. If weeds do collect on the tine shaft, it's easier to remove them. Can be easily installed on the Mantis tiller tine shaft.



KICK STAND (4333)

A practical feature whenever you want to take a break, one quick kick of the stand and your Mantis tiller stands upright. Just tip up the kickstand when you are ready to start working again. Attaches easily to the base of the tiller handles, and flips up or down for instant use. Durable solid steel construction.



WHEEL KIT (9222)

The Mantis tiller wheel kit lets you have the option to roll or carry your Mantis tiller to your garden. Park your Mantis tiller in an upright position to add petrol, or store it upright when you don't have a wall to lean it against. Wheels add stability when you use the Crevice Cleaner or Border Edger attachments. Rubber wheels make the Mantis tiller easy to roll around your garden, over curbs, and up hills. Attaches to your tiller in a few minutes, wheels can be adjusted to six different heights and can be removed easily.

**TILLER STORAGE RACK (811005)**

The storage rack saves precious room in your garage, shed or cellar. Simply hang your Mantis tiller on the wall when it is not in use. A set of seven different hooks are delivered with the storage rack (screws and nuts also included). A great idea that keeps your Mantis attachments right at your fingertips. Tiller and attachments are sold separately.

While stocks last

**MANTIS TILLER SERVICING****6 PACK OIL 1 GAL. MIX (1522)**

100ml bottles of 2-stroke oil (50:1 mix) for Mantis 2-stroke tillers. Mix each bottle with 5 litres of unleaded petrol to obtain the 50:1 mixture. Please note that once petrol and oil are mixed, its quality deteriorates rapidly, after about a month. That's why we recommend you mix only the required quantity each time you use the machine.

**HANDY ITEM KIT FOR SV4 2 STROKE ENGINE (1422)**

The handy item kit contains the items you need to keep your 2-stroke petrol tiller in excellent working order. This kit is suitable for all Mantis Tillers with the red air filter cover bought before March 2003.

Contains:

- | | | | |
|---|---------------------------|---|------------------|
| 1 | 2 bottles of 2 stroke oil | 6 | 1 plug spanner |
| 2 | 1 spark plug | 7 | 1 gearbox gasket |
| 3 | 2 air filter pads | 8 | 1 fuel filter |
| 4 | 1 tube grease | 9 | 1 fuel funnel |
| 5 | 2 tine clips | | |

SUITABLE FOR TILLERS BOUGHT BEFORE MARCH 2003

**HANDY ITEM KIT FOR GX25 4 STROKE ENGINE (3777)**

Our special handy item kits contain everything you'll require for the simple servicing of your Honda GX25 4-stroke petrol tiller engine. They help prevent engine damage and guarantee a smooth running of the Honda engine.

Each kit contains:

- | | | | |
|---|------------------------|---|-----------------------|
| 1 | 1 bottle of 1litre oil | 5 | 1 tube of gear grease |
| 2 | 1 spark plug | 6 | 1 socket spanner |
| 3 | 2 retaining clips | 7 | 1 funnel |
| 4 | 1 air filter pad | 8 | 1 gearbox gasket |

**HANDY ITEM KIT FOR SV6 2 STROKE ENGINE (5444)**

Everything you need to service your SV6 2 Stroke Engine.

Each kit includes:-

- | | | | |
|---|---------------------------|---|------------------|
| 1 | 2 bottles of 2-stroke oil | 5 | 2 tine clips |
| 2 | 1 spark plug | 6 | 1 plug spanner |
| 3 | 2 Air Filter pads | 7 | 1 gearbox gasket |
| 4 | 1 Tube Grease | 8 | 1 fuel funnel |

The kit contains the items you need. This kit is suitable for all Mantis 2-stroke Tillers bought since March 2003. These machines have a black air filter cover.

While stocks last

SUITABLE FOR TILLERS BOUGHT AFTER MARCH 2003





MAKE COMPOST IN 3 EASY STEPS WITH A MANTIS COMPOSTUMBLER

HOW MANTIS COMPOSTERS WORK

Thanks to the Mantis CompostTumbler's unique design, it's quick and easy to create high-quality fertiliser from your kitchen and garden waste. Our composter models, designed for different household sizes, use the same technology to deliver the best results. Here's how it works.

1. Collect Organic Waste

Simply collect a variety of organic waste materials from your property and garden. Put them in your CompostTumbler composter, close the door, and immediately give the tumbler 5 turns.



2. Tumble your compost

Give the tumbler 5 turns every day. No heavy lifting!



3. Finished Compost in only a few weeks!

Open the door and tumble out your finished compost.



COMPOSTING TIPS

- Be sure the mix of ingredients you put in your tumbler contains wastes high in nitrogen and carbon for a good balance.
- Do not attempt to make compost using any products that have been treated with chemical fertilizers or pest control products.
- If you have bulky items to compost, such as corn cobs, melon rinds, and shrub clippings, be sure to run them through a shredder or chop up the material into smaller pieces before putting them your tumbler. Larger items take longer to break down.

WHAT YOU CAN COMPOST

You can add almost any organic material to your compost, and in small quantities you're unlikely to upset the balance of 'greens' and 'browns'.

We give you a free guide to composting with your new Mantis CompostTumbler.

These are just a few of the things you can turn into quality fertiliser:

- Fresh Grass Clippings
- Shredded Leaves
- Kitchen Trimmings and Peels from Vegetables and Fruits
- Sawdust
- Garden Throwouts such as dead flowers and plants
- Weeds (Yes! The temperature inside the Compost Tumbler gets hot enough to kill the weed seeds!)
- Manure from horses, cows, chickens, rabbits, pigs or sheep. (Do not attempt to compost any wastes from dogs or cats.)
- Black-and-white sections of newspapers
- Egg cartons
- Rotted fruits and vegetables
- Pine Needles
- Coffee Grounds
- Tea Leaves or Tea Bags





PORTABLE COMPOSTER ROLLS DIRECT TO THE GARDEN

MAKES COMPOST IN 4 TO 6 WEEKS

The Back Porch ComposTumbler was developed for garden composting. If you have a city property or a very small garden, this little composter was designed just for you. The frame includes two wheels so you can take the compost right to your flower beds and garden areas. You can add to it each day for continuous composting.

KEY BENEFITS

- 1 Holds up to 140 litres of material** to make plenty of compost for smaller gardens and flower boxes
- 2 Turning grooves** let you grip the drum to turn it
- 3 Aerator/drainage unit** on the bottom combined with screened vents on each side allow the proper air intake and the release of excess moisture, without spilled compost
- 4 Insulated high-density polyethylene drum** lets you compost in cooler weather
- 5 Convenient wheels** let you take the compost directly to your flower beds and garden areas

Model	CT08001 BACK PORCH COMPOSTUMBLER
Drum capacity	140 litres
Size	37"/94 cm H x 31"/79 cm W x 26"/66 cm D
Drum height	7"/18 cm off the ground
Drum materials	Double-wall, high density polyethylene with insulating air cell
Frame	Polyester powder-coated black steel tubing, with two wheels
Drainage	Aerator/drainage unit on the bottom
Air Circulation	Screened vents on each side
Turning	Indented grooves on drum allow grip for turning
Colour	Sage green
Assembly	Some assembly is required



COMPACT COMPOSTUMBLER PERFECT FOR SMALL TO MEDIUM GARDENS

MAKES COMPOST IN AS LITTLE AS 14 DAYS!

Compact ComposTumbler was developed in the 1990's specifically for home composting by suburban gardeners and homeowners who garden on smaller/medium properties.

KEY BENEFITS

- 1 Holds up to 335 litres of material** to make plenty of compost for medium size gardens
- 2 Convenient, gear-driven, easy-to-spin handle** makes it easy to turn even a fully loaded drum
- 3 Aeration/drainage units** on the door allow the proper air intake for oxygen-hungry bacteria and the release of excess moisture, without spilled compost
- 4 Interior mixing fins** ensures thorough mixing as you turn the drum. Prevents material from sticking to the sides. Produces faster decomposition
- 5 STURDY, powder-coated galvanised steel wall** construction is rust resistant, gives long-lasting use batch after batch

Model	CT02001 COMPACT COMPOSTUMBLER
Drum capacity	335 litres
Size	43"/109 cm H x 42"/107 cm W x 33"/84 cm D
Drum height	12"/30 cm off the ground
Drum materials	Powder-coated galvanised steel, rust-resistant
Frame	Tubular steel with black powder-coated finish
Drainage	Aerator/drainage unit on the door
Air Circulation	Screened vents on the end caps
Turning	Gear-driven handle on frame
Colour	Sage green
Assembly	Composter is delivered in boxes and requires assembly using basic tools






GTM – WOOD CHIPPERS AND TREECARE FOR EXPERT GARDENERS AND PROFESSIONALS

GTM Professional wood chippers are designed and produced by De Wild B.V., a family owned business with 50 years of experience and a passion for green care.

The GTM Professional range of compact and powerful wood chippers are designed to offer a portable option to expert gardeners and professionals for chipping branches and shredding leaves and crops into useful material like mulch and compost – perfect for tree care, landscaping, forestry and garden maintenance.

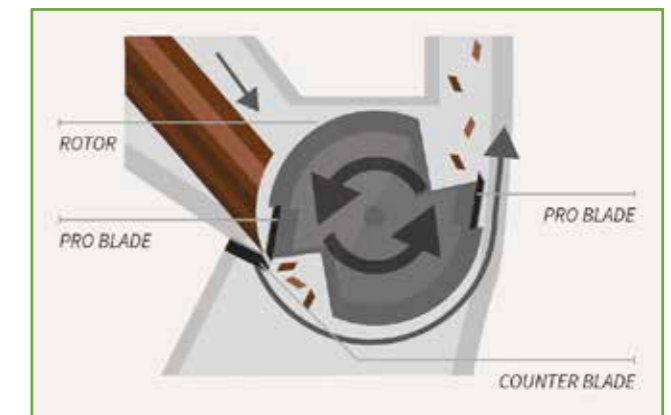

UNIQUE

Efficient, effective and safe to operate due to their chipping system and unique drum design – a rotor with two PRO double-sharpened blades that rotate against the counter blade at high speed. The system pulls branches up to 12 cm thick into the machine, chips them and ejects clean cut wood chips time after time.

A FAST WORKER

The adjustable deflector can throw the woodchips into a wheelbarrow, trailer or directly on to the ground. The strong PRO blades made of high-alloy steel are reversible and can be sharpened up to 4 times. The extra wide chute means that it is rarely necessary to remove side branches which guarantees a high capacity and efficient working speed.

USEABILITY

A solid chassis ensures that the wood chipper is perfectly balanced, even on rough terrains. They can easily be operated and moved by one person and because of the compact dimensions they are easy to transport.

VALUE FOR YOUR BUSINESS

In contrast to the disposal of pruning waste, chipping saves valuable space, time and money as well as turning the carbon footprint of a business around through reducing waste.

SAFETY FIRST

All the machines are extensively tested for safety and ease of use and meet the highest standards. Safety features include a switch to immediately stop the motor, panic bar and rotor locking system. We also recommend wearing a face visor and gloves when using the wood chippers.

CHIPS ARE VERSATILE

Wood chips are perfect to use as a mulch or soil improver, for example in a vegetable garden where they provide protection against the effects of the sun and help the soil retain moisture. They are also ideal to use as a filling material for paths and borders. Composting also creates valuable resources for the garden.

SUSTAINABILITY

GTM Professional equipment helps to minimise the impact on the environment since by shredding branches and other organic waste, its decomposition time is reduced to a minimum, optimising the natural cycle and increasing the quality of the soil.

GTM PROFESSIONAL HAS A WOOD CHIPPER SUITABLE FOR ALL YOUR NEEDS.

GTS 600

Compact and lightweight wood chipper, perfect for private gardeners

This lightweight 68kg / 150lbs chipper can easily be moved around the garden rather than moving unwieldy branches to the machine. The chips can then be processed on the spot into your wheelbarrow and used on your garden paths or flower beds.

Branches with a diameter up to 5 cm (2") are easily pulled into this gravity-fed machine and chipped, ensuring a high working speed. The GTS 600 comes with double sharpened blades that last twice as long as regular blades.

There is also a foot activated safety button that stops the machine immediately.



For compact storage the hopper can be put straight up and the output chute can be stored in the hopper.

"FABULOUSLY SIMPLE, EASY TO MAINTAIN AND EASY TO USE! WHAT'S MORE TO WANT?"



Model	MSGTS600G
Engine	196 cc Loncin
Branch diameter	5 cm / 2"
Input height	113 cm / 44"
Input dimensions	25 x 25 cm / 9.8" x 9.8"
Output height	81 cm / 32"
Output direction	Rear
Deflector	85° adjustable
Safety items	Rotor blocking system / Emergency button
Wheel diameter	26 cm / 10.2"
Wheels	Plain bearings
Cutter Drive	Direct Drive
Blades	Double sharpened blades
Dimensions (LxWxH)	125 x 57 x 133 cm / 49" x 22.5" x 52.4"
Weight	68 kg / 150 lbs

GTS 750

Compact chipper, Powerful performance

The GTS 750 is as compact as the GTS 600 but with greater performance due to a wider and heavier rotor system. Specially designed for semi-professionals and high demanding private users, this wood chipper can handle branches of fresh wood up to 7 cm (2.8") in diameter (dry wood: 5.5 cm / 2.2"). The chips are thrown out at a height of 77 cm, all standard wheelbarrows fit underneath.

Light in weight the GTS 750 is perfectly balanced and easy to move with its large pneumatic wheels and double transport handles. The high handle serves to easily push the machine, whilst the low handle makes pulling the machine easy. The efficient



rotor chipping system, directly mounted on the shaft, guarantees the highest possible working speed.

In addition the machine is equipped with an emergency stop button that immediately stops the engine.

"THE MOST COMPACT VERSION OF A PROFESSIONAL WOOD CHIPPER."



Model	MSGTS750G
Engine	270 cc Loncin G270F
Branch diameter	7 cm / 2.8"
Input height	111 cm / 44"
Input dimensions	25 x 31 cm / 10" x 12"
Output height	77 cm / 30"
Output direction	Rear
Deflector	55° adjustable
Safety items	Emergency button
Wheel diameter	26 cm / 10.2"
Wheels	26 cm with ball bearings
Cutter Drive	Direct Drive
Blades	Double sharpened blades
Dimensions (LxWxH)	183 x 62 x 144 cm / 72" x 24" x 57"
Weight	90kg / 198 lbs

GTS 900

Extra wide input area for efficient processing

The GTS 900 is a compact and lightweight machine that can chip branches up to 8 cm (3.1") in diameter.

With an extra wide input area even branches with a lot of side branches are effortlessly fed into the machine. This will save you lots of extra pruning time.

Two handles at the front of the machine let you move the machine around your garden or field saving you carrying the branches to the machine. The GTS 900 is a powerful gravity fed machine but can still be operated by just one person.



For your safety the machine is equipped with a safety button that immediately stops the motor.

"THIS WOOD CHIPPER IS NOT TOO HEAVY, BUT STILL FEELS ROBUST. BRANCHES WITH A LOT OF GREENERY CAN EASILY PASS THROUGH."



Model	MSGTS900G
Engine	302 cc Loncin
Branch diameter	8 cm / 3.1"
Input height	101 cm / 39.8"
Input dimensions	40 x 28 cm / 15.7" x 11"
Output height	138 cm / 54.36"
Output direction	Side
Deflector	80° adjustable
Safety items	Emergency switch
Wheel diameter	39 cm / 15.4"
Wheels	Ball bearings
Cutter Drive	Double V belts
Blades	PRO blades
Dimensions (LxWxH)	150 x 67 x 145 cm / 59.1" x 26.4" x 57.1"
Weight	140-151 kg / 309 - 333 lbs

GTS 900 COMPO

Multifunctional chipper for branches and grass

The GTS 900 COMPO is a multifunctional chipper with two different outputs. The high output can be used for shredding branches up to 8 cm (3") and other dry materials. Wood chips are ejected and can be collected in a trailer or container. The low output is suitable for soft, wet materials – such as grasses, hedge shavings, plant debris and leaves. The shredded material accelerates the composting process. Green waste no longer has to be disposed; it's recycled on the spot to make valuable compost. Both outputs are easy to assemble and disassemble allowing you to change quickly between the two configurations.

Due to the wide input the GTS 900 COMPO can process big volumes at once. Add its efficient rotor drum chipping



Image shows low output chute

system and a high working speed is guaranteed.

Two ergonomic handles at the front of the machine allow you to move the machine around your garden or field so there is no need to move the branches to the machine. The machine also has a foot activated safety button that stops the machine immediately.

"A MULTIFUNCTIONAL SHREDDER. ORNAMENTAL GRASSES, PLANT DEBRIS, HEDGE CLIPPINGS AND LARGE AMOUNTS OF LEAVES, THIS MACHINE CAN HANDLE EVERYTHING!"



Image shows high output chute

COMES WITH WOODEN PUSH TOOL (GTSM110001000) AND GRID (GTSM039084000) AS STANDARD

Model	MSGTS900COMPO
Engine	302 cc Loncin G300FA
Branch diameter	8 cm / 3.1"
Input height	101 cm / 39.8"
Input dimensions	40 x 28 cm / 15.7" x 11"
Output height	High 138 cm / 54.36", Low 35 cm / 13.8"
Output direction	Side - chipping / Rear - shredding
Deflector	Side - 80° adjustable / Rear - fixed
Safety items	Emergency switch
Wheel diameter	39 cm / 15.4"
Wheels	Ball bearings
Cutter Drive	Double V belts
Blades	PRO blades
Dimensions (LxWxH)	125 x 67 x 138 cm / 49.2" x 26.4" x 54.3"
Weight	140-151 kg / 309 - 333 lbs

GTS 1300

Powerful gravity-fed machine that's the most compact in its class

The GTS 1300 is a professional and powerful wood chipper with compact dimensions, equipped with an efficient drum chipping system. Perfect when you need to chip large amounts of wood but cannot use a big, heavy machine.

The GTS 1300 is light and easy to manoeuvre by one person and can be used directly on the working areas, making this machine very suitable for densely grown areas and fields.

Due to the large input there is hardly any need to prune side branches in advance, guaranteeing a high working speed.

At 80 cm (32") wide it's the most compact chipper in its class



but can shred fresh cut wood up to 10 cm (4") in diameter. This machine has a safety panic bar that stops the machine immediately and also comes with a safety lock that switches on the input and output block to stop the operation of the machine during maintenance.

"IT IS A POWERFUL, ALL-EATER AND ABSOLUTELY DOES NOT HANG AROUND. THE ENGINE IS ROBUST AND YET EXTREMELY SMOOTH."



Model	MSGTS1300G15
Engine	420 cc Loncin
Branch diameter	10 cm / 4"
Input height	110 cm / 43.3"
Input dimensions	34 x 42 cm / 13.4" x 16.5"
Output height	155 cm / 61"
Output direction	Side
Deflector	85° adjustable
Safety items	Panic bar, safety switches, rotor locking system
Wheel diameter	40 cm / 15.7"
Wheels	Ball bearings
Cutter Drive	Double V belts
Blades	PRO blades
Dimensions (LxWxH)	90 x 106 x 155 cm / 35.4" x 41.7" x 61"
Weight	210 kg / 463 lbs

GTS 1300 COMPO

Multifunctional chipper for branches and grass

The GTS 1300 COMPO is a multifunctional chipper with two different outputs. The high output can be used for shredding branches up to 10 cm (4") and other dry materials. Wood chips are ejected and can be collected in a trailer or container. The low output is suitable for soft, wet materials – such as grasses, hedge shavings, plant debris and leaves. The shredded material accelerates the composting process. Green waste no longer has to be disposed; it's recycled on the spot to make valuable compost. Both outputs are easy to assemble and disassemble allowing you to change quickly between the two configurations.

Due to the wide input the GTS 1300 COMPO can process



big volumes at once. Add its efficient rotor drum chipping system and a high working speed is guaranteed.

At 80 cm (32") wide it's the most compact chipper in its class, but can shred fresh cut wood up to 10 cm (4") in diameter. Again this machine has a safety panic

bar that stops the machine immediately. It also comes with a safety lock that switches on the input and output block to stop the operation of the machine during maintenance.

"THIS ALL-IN-ONE MACHINE CAN BE USED ANYWHERE, IT IS POWERFUL YET COMPACT."

COMES WITH WOODEN PUSH TOOL (GTSM110001000) AND GRID (GTSM039084000) AS STANDARD



Model	MSGTS1300COMPO
Engine	420 cc Loncin G420F
Branch diameter	10 cm / 4"
Input height	103 cm / 40.6"
Input dimensions	50 x 35 cm / 19.7" x 13.8"
Output height	High 160 cm / 63", Low 35 cm / 13.8"
Output direction	Side - chipping / Rear - shredding
Deflector	Side - 85° adjustable / Rear - fixed
Safety items	Panic bar, safety switches, rotor locking system
Wheel diameter	40 cm / 15.7"
Wheels	Ball bearings
Cutter Drive	Double V belts
Blades	PRO blades
Dimensions (LxWxH)	203 x 77 x 160 cm / 80" x 30.3" x 63"
Weight	198.5kg / 438lbs

GTS 1300 4-WHEEL

Powerful but easy to move chipper

The GTS 1300 4-Wheel with Loncin G420F engine has a 4-wheel chassis to make moving the machine even easier.

The compact and powerful GTM 1300 has a high capacity to easily shred fresh branches up to 10 cm / 4" in diameter (dry wood up to 8 cm / 3"). With a moisture fraction of 60-70%, the 1300 processes a maximum of 880 kg of mixed cuttings per hour.

The efficient rotor chipping system automatically pulls the branches inside, which guarantees a high working speed. On the rotor, two PRO-blades are mounted that rotate along the counter blade at a high speed. The PRO-blades made of high-alloy steel have an extra-long life and are



provided with two cutting edges. When both sides are worn out, the blades can be sharpened (always have this done by a specialist).

The 1300 has a robust design with refined details, the ideal machine for tree maintenance, landscaping, and forestry.

“THIS POWERFUL MACHINE IS EASY TO MOVE THANKS TO ITS FOUR WHEELS”

NEW



Model	MSGTS1300FWG15
Engine	Loncin G420F
Max. diameter wood	10 cm / 4"
Output height	163 cm / 64"
Deflector	Possible to adjust continuously to 85°
Safety items	Panic bar and safety switches
Blades	2 PRO blades and 1 counter blade
Cutter Drive	Double V-belts
Dimension	153 x 77 x 163 cm
Weight	212kg / 467lbs

GTS 1300 RG

Powerful but compact tracked wood chipper

The GTS 1300 RG is equipped with caterpillar tracks to operate on rough and hard to access terrain, making this machine suitable for gardens, parks, fields and forestry. The low and rigid chassis is constructed in such a way that the machine can easily handle steep hills up to 20° incline. The tracks are driven by a powerful engine and has 3 speeds and a reverse position.

The chassis is specially lowered making the input height only 10 cm (4") higher than the GTS 1300 on wheels.

The GTS 1300 RG wood chipper can shred fresh cut wood with a maximum diameter of 10 cm (4") and dry wood of 8 cm (3"). The gravity fed chipper is equipped with a panic bar



around the input and safety lock switches on the input and output. It also comes with a rotatable output with adjustable deflector that can blow the wood chips wherever you need them to go. The wood chips are ejected high so that they can also easily be collected in a trailer.

“ THIS WOOD CHIPPER WORKS QUICKLY AND IS EASY TO MOVE.”



Model	MSGTS1300RG15
Engine	Loncin G420F
Max. diameter wood	10 cm / 4"
Input	50 x 28 cm / 19.7" x 11"
Input height	111 cm / 43.7"
Output height	160 cm / 63"
Deflector	Possible to adjust continuously to 85°
Turnble output	Yes
Safety items	Panic bar and safety switches
Blades	2 PRO blades and 1 counter blade
Cutter Drive	Double V-belts
Dimensions (LxWxH)	215 x 72 x 170 cm / 84.6" x 28.3" x 67"
Weight	362kg / 798lbs
Caterpillar tracks engine	Loncin G200F
No. of gears	3 x forward and 1 x reverse
Max. speed	4.5 km/h
Width of tracks	18 cm / 7.1"

GTS 1300 WD

A professional wood chipper with a battery self-propelled system for easy transportation

The GTS 1300 WD is a battery powered (2 x 12V) self-propelled drive system that can cover distances of up to 9.5km on flat paved ground and approx. 3kms on hilly or muddy terrain. The system can handle slopes up to 15° and has a selector switch for forward and reverse. On the handlebar, the twist grip allows the speed to be variably adjusted to your preference and check remaining battery life.

The GTS 1300 WD wood chipper can shred fresh cut wood with a maximum of 10 cm (4") and dry wood of 8 cm (3").

Steering is easy thanks to the two swivel wheels at the front allowing the chipper to



go through rough and uneven terrain easily. Thanks to its compact dimensions the machine is also easy to use in dense vegetation. The chipper is also equipped with safety features like a panic bar and safety switches.

“LOADING AND UNLOADING THE MACHINE IS NO MORE EFFORT.”



Model	MSGTS1300WDG15
Engine	Loncin G420F
Battery charging time	4.5 hours
Max. diameter wood	10 cm / 4"
Input height	106 cm / 42"
Input Dimensions	50 x 28 cm x / 19.7" x 11"
Output height	160 cm / 63"
Output direction	Adjustable up to 270°
Deflector	Infinitely adjustable up to 100°
Safety items	Panic bar and safety switches
Wheels	With ball bearings at rear 39 cm / 15.4" swivel wheels at front 25 cm / 9.8"
Blades	2 PRO blades and 1 counter blade
Cutter Drive	Double V-belts
Dimensions (LxWxH)	150 x 73 x 163 cm / 59" x 29" x 64"
Weight	235kg / 518lbs

GTS 1800 RH-H

Powerful but still compact tracked chipper

The GTS 1800 RH-H with 21 HP Honda engine is a self-propelled powerful wood chipper on tracks for professional use in the field of tree maintenance and landscaping. With the GTS 1800 RH-H you can chip fresh cut wood with a maximum diameter of 12 cm (4.4") and dry wood of 10 cm (3").

The self-propelled tracks are powered by a Honda GX160 engine. It has three speeds forward (1.8, 3.6 and 4.5 km/h) and one reverse speed (1.1 km/h). This machine is designed to easily move through difficult and hilly terrain. That way you can always manoeuvre the GTS 1800 RH-H to where you are working and process your pruning waste on the spot.



The driving system can handle slopes up to 20°, so you can easily drive the machine in a van or onto a trailer. With a 270° turnable output, the wood chips are ejected in any direction. Despite its high performance and robust construction, it still passes through all regular garden gates with a width of only 73 cm.

The safety switches on the input and output block the operation of the machine during maintenance work. For optimum safety during this work the rotation of the rotor can also be blocked with the rotor lock.

“THIS WOOD CHIPPER WORKS QUICKLY AND IS EASY TO USE.”



Model	MSGTS1800RH-H
Engine	Honda GX630 V-Twin
Max. diameter branches	12 cm / 4.4"
Input height	111 cm / 43.7"
Input dimensions	50 x 35 cm / 19.7" x 13.8"
Output height	170 cm / 67"
Output direction	Turnable up to 270°
Deflector	Infinitely adjustable up to 100°
Safety items	Panic bar and safety switches
Blades	2 PRO blades and 1 counter blade
Cutter Drive	3 V-belts
Dimensions (LxWxH)	215 x 72 x 170 cm / 84.6" x 28.3" x 67"
Weight	400kg / 882lbs
Caterpillar tracks engine	Honda GX160
No. of gears	3 x forward and 1 x reverse
Max. speed	3.7 km/h
Width of tracks	18 cm / 7.1"

GTS 1800 WD

A high performance wood chipper with a battery self propelled system for easy transportation

The GTS 1800 WD is a battery powered (2 x 12V) self propelled drive system that can cover distances of up to 6km on flat paved ground and approx. 2kms on hilly or muddy terrain. The system can handle slopes up to 15° and has a selector switch for forward and reverse. On the handlebar, the twist grip allows the speed to be variably adjusted to your preference and check remaining battery life.

The GTS 1800 WD wood chipper can shred fresh cut wood with a maximum of 12 cm (4.4") and dry wood of 10 cm (3").

Steering is easy thanks to the two swivel wheels at the front allowing the chipper to



go through rough and uneven terrain easily. Thanks to its compact dimensions the machine is also easy to use in dense vegetation. The chipper is also equipped with safety features like a panic bar and safety switches.

“LOADING AND UNLOADING THE MACHINE IS NO MORE EFFORT.”



Model	MSGTS1800WD
Engine	Honda GX630
Battery charging time	4.5 hours
Max. diameter wood	12 cm / 4.4"
Input height	106 cm / 42"
Input Dimensions	50 x 35 cm x / 19.7" x 13.8"
Output height	160 cm / 63"
Output direction	Adjustable up to 270°
Deflector	Infinitely adjustable up to 100°
Safety items	Panic bar and safety switches
Wheels	With ball bearings at rear 39 cm / 15.4" swivel wheels at front 25 cm / 9.8"
Blades	2 PRO blades and 1 counter blade
Cutter Drive	3 V-belts
Dimensions (LxWxH)	160 x 73 x 163 cm / 63" x 29" x 64"
Weight	286kg / 631lbs

GTS 1800 PTO

A robust professional wood chipper, suitable for coupling to a tractor

The GTS 1800 PTO wood chipper is suitable for chipping fresh, green wood with a maximum diameter of 14 cm and dry wood up to 12 cm and can be coupled to a tractor up to 50hp with a 3-point attachment and power take-off.

The wood chipper is powered via the power take off of all brands of tractors with Cat.1 connection. The big advantage of a PTO-driven wood chipper is that the machine can be moved easily and quickly and does not require separate engine maintenance.

This powerful gravity fed wood chipper is equipped with an efficient drum chipping system



for excellent performance. The GTS 1800 PTO comes standard with rotatable output and adjustable deflector that can blow the wood chips into a trailer if required.

The safety mechanism (panic bar and safety switches) is entirely independent of the tractor.



“THERE IS ALWAYS AN ABUNDANCE OF WORK ON OUR FARM. I'M REALLY HAPPY THAT THE CUTTINGS ARE GONE SO QUICKLY WITH THIS WOOD CHIPPER. THIS MACHINE EATS WOOD.”

Model	MSGTS1800P
Chipping method	Drum chipper
Drive	PTO
Type	CAT 1, 3 point linkage
Required tractor power	25-50Hp
Cutter drive	3 V-belts
Blade type	Double grinded blades (2x)
Counter blade	Yes
Rotation speed motor (RPM)	Max. 540
Capacity	Max. Ø 14 cm / 5.5"
Height input	100 cm / 39.4"
Dimensions input	56 x 38 cm / 22" x 15"
Output height	151 cm / 59.4"
Output direction	270° adjustable
Deflector	Max. 100°
Safety	Rotor blocking system Panic bar
Dimensions (LxWxH)	148 x 90 x 135 cm
Sound level (LWA)	116 dB (A)
Weight	255kg / 562lbs

SPECIAL ORDER CHIPPERS

A number of chippers with different engines are available to order from your local GTM dealer.

SPECIAL ORDER CHIPPERS	
DESCRIPTION	MODEL NUMBER
GTS1300 Loncin G420FD E/S engine (Electric Start)	MSGTS1300GE15
GTS1300 On Caterpillar Tracks Loncin GTE E/S engine (Electric Start)	MSGTS1300RGE15
GTS1300 Compo Loncin G420FD E/S engine Electric Start	MSGTS1300COMPOE

SPARE PARTS AND ACCESSORIES

Spare parts and accessories for your machine are available to order from your local GTM dealer.

ITEM	NEW WOODEN PUSH TOOL (FOR MSGTS900COMPO)	NEW WOODEN PUSH TOOL (FOR MSGTS1300COMPO/E)	SWIVEL CHUTE (FOR MSGTS900V3 / 900CV2)	NEW SWIVEL CHUTE (FOR MSGTS1300G15)	TOW BAR ASSY (FOR MSGTS900 V2 & MSGTS1300G V4)	TOW BAR ASSY (FOR MSGTS900G & MSGTS1300G15)	NEW GRID (FOR MSGTS1300COMPO/E & MSGTS900COMPO)	HOUR COUNTER (FITS TO ALL MODELS)	BUMPER SUPPORT (FITS TO ALL MSGTS1300 MODELS)
Product code	GTSM110001000	GTSM110002000	MSGTSA030009000	GTSA070012000	GTS0070000015	GTSA070003000	GTSM033507000 & GTSM039084000	GTSE11HOURCRL	GTSM023015000



ELEPHANTS TRUNK HARNESS

The GTM Professional Elephants Trunk Harness will help you to trim hedges all day long without muscle strain and double your work speed.

The comfortable harness is worn like a backpack and reduces the weight of the hedge trimmer by 3 kg (6.5 lbs). The length can be adjusted and is suitable for hedge trimmers or other handheld machines from 4.5 to 8 kg (10 - 17.5 lbs).

The aluminium tube is fully rotatable, offering even more flexibility for you. The harness has been adapted for a better and more ergonomic fit with the adjustable straps on both the shoulders and the hips. The Elephants Trunk 3 provides even more comfort with adjustable shoulder pads.

A clear view and an unlimited work area will help you to work quicker and with greater safety and improved accuracy.

KEY BENEFITS

- 1 Nylon ball bearings
- 2 Lightweight aluminium
- 3 Adjustable length
- 4 Turnable 360°
- 5 Adjustable straps
- 6 Improved ergonomic design

Model	MHH01010N 2.2
Length	Adjustable
Bearings	Nylon ball
Harness	Standard
Support	Balancer
Weight	4.5 - 8 kg / 10 - 17.5 lbs

Model	MHH01010N 3
Length	Adjustable
Bearings	Nylon rollers
Harness	Adjustable shoulder pads
Weight	4.5 - 8 kg / 10 - 17.5 lbs





RATTLEWEDGE

The GTM Professional Rattlewedge is a patented tool that has been developed by arborists for you – to improve the security and working conditions when you are felling trees or cutting up large pieces of wood. The Rattlewedge can be inserted into the notch made in the wood and tightened up to open up the notch, allowing you to control when and where the tree will fall. The Rattlewedge helps you control the wood without any effort, whether you are in the tree or on the ground.

Made of lightweight aluminium and weighing only 1.4 kg (3 lbs), it can be easily carried up into the tree and the weight of the tree will make the task of felling that much easier and safer.



Model KSIRW0000



CLASSEN®

Classen are serious about manufacturing cutting-edge, durable and easy-to-use equipment for professional landscapers and homeowners.

The full product line incorporates features that enhance operator comfort and minimise maintenance. It's their way of taking the backache out of lawn care, so you stay productive and profitable.

AERATOR POWER STEER™ PRO TA25

Transform gruelling muscle-work into simple fatigue-free steering and comfortably move from one lawn or local authority ground to the next with the PRO TA25 Aerator.

The PRO line offers productivity-enhancing features to help landscapers complete more projects quickly and increase profits. The PRO line's proven designs include important extras, such as hydrostatic transmissions, anti-vibration grips and power steering.

KEY BENEFITS

- Tight hole pattern and all-tine propulsion produces more holes for the best quality of core results
- Patented split-drive technology allows power steering through the tines
- Simple controls allow operators to aerate straight, follow curves and turn left or right
- Protective chain guards help keep grass, leaves and cores out of chains and sprockets
- Removable weight and fillable water drum add weight for greater tine penetration in tough soil

BEST SUITED FOR:

Landscapers and Turf Care Professionals

IDEAL LAWN SIZE:

Large Lawns or Local Authority

2 YEARS WARRANTY*

*2 years for domestic providing the machine is serviced by the supplying dealer.

Model	TA25DAE AERATOR
Engine	Honda® GX120
Aerating width	24.375"
Aerating depth	Up to 2.75"
BHole pattern	4.06" x 7"
Coverage	32,850 sq. ft. / hr
Tines	(36) 3/4" OD
Holes / ft²	6.5 per sq. ft.
Weight bar	42 lbs removable steel bar
Dimensions (HxWxL)	48.5" x 40.5" x 50"
Dry weight	362 lbs with weight (320 lbs without)





AERATOR STEERABLE COMPACT TA18

The industry's most compact aerator is also the most productive.

Classen equipment is built with the professional in mind with quality components, productivity features, and service and maintenance ease.



AERATOR RECIPROCATING RA21

Transform gruelling muscle-work into simple fatigue-free steering and comfortably move from one lawn or local authority ground to the next with the RA21.

The reciprocating tines of the RA21 punch clean holes in tough, hardened soil.

KEY BENEFITS

- Best Quality of Core®: Five rows of tines pull 15% more cores per square foot than competitive models
- Steerable tine bank enhances manoeuvrability and eases end of row turning
- Dual front drive wheels provide exceptional balance on hills
- Fold-down handle, removable weights and side lift/tie-down brackets ease transport
- Exclusive tine engagement system greatly reduces the effort required to lower and raise tines
- Honda® GX120 engine achieves the fastest speed in its class, 4.2 mph
- Easy-access drive sprocket and bail result in simple maintenance

BEST SUITED FOR:
Homeowners and Landscapers

IDEAL LAWN SIZE:
Small to moderate



Model	TA18HE AERATOR
Engine	Honda® GX120
Aerating width	16"
Aerating depth	Up to 3"
Hole pattern	3.4" x 7"
Coverage	29,500 sq. ft. / hr
Tines	(30) 3/4" OD
Holes / ft²	6.5 per sq. ft.
Weight bar	2 x 21.5 lbs removable steel bars
Dimensions (HxWxL)	48" x 27.2" x 46"
Dry weight	257 lbs with weight (214 lbs without)

KEY BENEFITS

- Tines reciprocate at 450 revolutions per minute for exceptional coverage
- Lightweight design makes end of row turning easy
- Fold-down handle for compact transport and storage
- Lightweight, rust-resistant, two-piece hood reduces overall unit noise and allows easy access for maintenance
- Lifting and tie-down handles for easy and safe transportation
- Front and rear tyre scrapes keep tyres free from dirt and allow maximum tine penetration
- Front and rear pneumatic wheels offer better flotation on turf and easier manoeuvrability

BEST SUITED FOR:
Landscapers and Turf Care Professionals and homeowners

IDEAL LAWN SIZE:
Any size that involves straight-line aerating

Model	RA-21HE AERATOR
Engine	Honda® GX160
Aerating width	16.25"
Aerating depth	Up to 2.75"
Hole pattern	2.6" x 7.5"
Coverage	26,000 sq. ft. / hr
Tines	(8) 5/8" OD
Holes / ft²	10 per sq. ft.
Weight bar	N/A
Dimensions (HxWxL)	39" x 31.5" x 64"
Dry weight	261 lbs



2 YEARS WARRANTY*

*2 years for domestic providing the machine is serviced by the supplying dealer.

2 YEARS WARRANTY*

*2 years for domestic providing the machine is serviced by the supplying dealer.



TURF OVERSEEDER HYDRO-DRIVE PRO HTS20

Place more seed rows in less time with the self-propelled PRO HTS20 Overseeder. Our industry-best 13 double-bladed shafts spaced 1.5 inches apart provide carpet-like coverage on the bumpiest terrain.

Our PRO line offers productivity-enhancing features to help landscapers complete more projects quickly and increase profits. The PRO line's proven designs include the important extras, such as hydrostatic transmissions, anti-vibration grips and power steering.



TURF OVERSEEDER WALK-BEHIND TS20

Seed new lawn, overseed an existing lawn or easily convert the TS20 into a turf rake or vertical cutter for additional turf care projects. The blades feature a cutting edge on both ends, which doubles the blade life.

KEY BENEFITS

- Single-handed control provides ease of operation in forward and reverse
- Folding handle means more space is available on your trailer.
- Turf tread flotation tyres provide exceptional balance and stability on hills, reduce soil compaction and eliminate tyre ruts
- Seed dial and on-board instruction chart allows operators to set the overseeder for the desired grass seed type, eliminating wasted seed
- 26 Heat-treated multi-purpose blades uniquely designed with a cutting edge on both ends of the blade, provide double the blade life
- 40 Lbs floating seed box follows bumpy terrain or locks in place at 10 depth settings for seeding on hills

BEST SUITED FOR:

Landscapers and Turf Care Professionals

IDEAL LAWN SIZE:

Large or local authorities

Model	HTS-20HE
Engine	Honda® GX270
Transmission	Hydrostatic, Hydro-Gear® T2
Seeding width	20"
Seeding blade	Double edged, heat treated blades, 1.5" spacing
Seedbox capacity	40 lbs
Dimensions (HxWxL)	45" x 31" x 57"
Dimensions (handle folded)	33" x 31" x 45.75"
Dry weight	300 lbs



KEY BENEFITS

- Industry's tightest blade placement** allows for better germination by planting 13 rows per 20" swath
- Folding handle** means easy transportation
- 5-position height adjustment** gives optimal depth control
- Easy to remove seed box** allows for simple cleaning
- Tyre scrapes** reduce soil build-up
- 26 heat-treated multi-purpose blades** re-reversible and sharpened on all four edges for double the blade life
- Converts to a turf rake** or vertical cutter in minutes with optional blade assemblies

BEST SUITED FOR:

Homeowners and Landscapers

IDEAL LAWN SIZE:

Small to moderate

Model	TS-20HE
Engine	Honda® GX160
Seeding width	20"
Seeding blade	Double edged, heat treated blades, 1.5" spacing
Seedbox capacity	30 lbs
Dimensions (HxWxL)	39.5" x 27" x 51"
Dimensions (handle folded)	29.5" x 27" x 30.5"
Dry weight	150 lbs



2 YEARS WARRANTY*

*2 years for domestic providing the machine is serviced by the supplying dealer.



SOD CUTTER HYDRO-DRIVE PRO HSC18

Maximise productivity for any application big or small with the PRO HSC18 Sod Cutter. Whether you are repositioning or relocating sod or expanding landscaping areas, the hydrostatic drive delivers high productivity with smooth power in both forward and reverse and the industry's fastest transport speed.

Our PRO line offers productivity-enhancing features to help landscapers complete more projects quickly and increase profits. The PRO line's proven design includes the important extras, such as hydrostatic transmission, anti-vibration grips and power steering.

KEY BENEFITS

- **Powered forward and reverse** with industry-best 4.7 mph transport speed
- **Integrated throttle/clutch control on handle** results in simple operation; releasing the handle puts the machine into idle
- **Advanced vibration dampening system** and **NEW** modified cam design provides enhanced operator comfort even with extended run times
- **Integrated rear swivel wheel** provides turning ease and locks in place for straight-line cutting
- **Knobby tread drive wheels** grip the turf better and reduce dirt buildup
- **18" blade standard**
Optional blade assemblies include 12", 16" or 20"



Easy-to-operate thanks to user-friendly controls and quick view how-to panel

2 YEARS WARRANTY*

*2 years for domestic providing the machine is serviced by the supplying dealer.

BEST SUITED FOR:

Landscapers and Turf Care Professionals

IDEAL LAWN SIZE: Any

Model	HSC185E
Engine	Honda® GX160
Dimensions (WxD)	18" x 2.5"
Dimensions (LxWxH) (handle folded)	52" x 24.5" x 38"
Dry weight	336 lbs

Model	HSC188E
Engine	Honda® GX240
Dimensions (WxD)	18" x 2.5"
Dimensions (LxWxH) (handle folded)	55" x 24.5" x 38"
Dry weight	359 lbs



SOD CUTTER ACCESSORIES

DESCRIPTION	MODEL NUMBER
Blade conversion 18" TO 12"	C900014
Blade conversion 18" TO 16"	C900037
Blade conversion 18" TO 20"	C900007



TURF RAKE HYDRO-DRIVE PRO TRS20

Dethatch large areas, hills and gradients easily with the PRO TRS20 Hydro-Drive Turf Rake featuring a productive and fatigue-free hydrostatic drive operation. For landscapers taking on a variety of projects, the PRO TRS20 converts to a turf seeder or vertical cutter in minutes.

Our PRO line offers productivity-enhancing features to help landscapers complete more projects quickly and increase profits. The PRO line's proven designs include the important extras, such as hydrostatic transmissions, anti-vibration grips and power steering.

KEY BENEFITS

- **Variable speed** from 0 to 3.4 mph for greater productivity
- **5-position, single-action height adjustment lever** moves in 1/4" increments for optimal depth
- **28 heat-treated flail blades** with spacing of 11/16" standard, adjustable up to 1-3/8" for greater flexibility
- **Fold-down handle** makes hauling and stowing simple
- **Hydrostatic drive transmission** makes for fast manoeuvring on hills and slopes by saving the operator from intense muscle-work
- **Wheels with sealed bearings** withstand challenging conditions and semi-pneumatic tyres smoothly move the unit across the turf

2 YEARS WARRANTY*

*2 years for domestic providing the machine is serviced by the supplying dealer.

BEST SUITED FOR:
Landscapers and Turf Care Professionals

IDEAL LAWN SIZE: Any

Model	TRS-20HE
Engine	Honda® GX160
Transmission	Hydrostatic, Hydro-Gear® T2
Operating width	20"
Blade/reel type	Flail
Dimensions (HxWxL)	12" x 16" x 20" & 24"
Dimensions (handle folded)	38" x 24.5" x 55"
Dry weight	215 lbs





TURF RAKE WALK BEHIND TR20

Dethatch your lawn or easily convert the TR20 into an overseeder or vertical slice aerator for additional projects. The TR20 turf rake is portable and compact for easy storage.

KEY BENEFITS

- **5-position, single-action height adjustment lever** moves in 1/4" increments for optimal depth
- **Provides flexibility** by converting to a rake with catcher, turf seeder or vertical cutter in minutes
- **Choice of double edged flail blades or spring tine reel** for more gentle raking
- **Heavy-duty greasable bearings with cast iron housings** give added durability and easy maintenance
- **Sealed bearings in wheels** add durability while semi-pneumatic tyres provide better flotation on turf and easier manoeuvrability
- **Fold-down handle** eases transportation and storage

BEST SUITED FOR:

Homeowners and Landscapers

IDEAL LAWN SIZE:

Small to moderate

Model	TR-20HE
Engine	Honda® GX160
Operating width	20"
Blade/reel type	Flail
Dimensions (HxWxL)	40" x 27" x 44"
Dimensions (handle folded)	29.58" x 27" x 30.5"
Dry weight	135 lbs



TURF RAKES ACCESSORIES

DESCRIPTION	MODEL NUMBER
Metal seed box assembly	C900055
Flail blade assembly	C900003
Multi-purpose blade assembly	C900026
Slicing blade assembly	C900027
Spring tine reel assembly	C900045

(Above Reel Accessories Include The Complete Reel Assembled, End Plates, Bearings, Pulley, Key And Fasteners)

2 YEARS WARRANTY*

*2 years for domestic providing the machine is serviced by the supplying dealer.



LITTLE WONDER®

Little Wonder are serious about manufacturing cutting-edge, durable and easy-to-use equipment for professional landscapers and homeowners.

The full product line incorporates features that enhance operator comfort and minimise maintenance. It's their way of taking the backache out of lawn care, so you stay productive and profitable.

PRO EDGER

Designed to produce clean, crisp edges quickly and efficiently—up to 90' per minute—the Little Wonder Pro Edger outperforms all others in the category. This user-friendly unit features fingertip controls for fatigue-free operation and control, making it the edger of choice among landscapers.

KEY BENEFITS

- 1 Largest available cast iron cutter head on the market.
- 2 10" steel blade is sharpened on all four sides for longer blade life.

Model	6232-00-59
Engine	Honda® GX120
Displacement	118 cc
Handles	Anti-vibration grips
Cast iron cutter head	Fixed
Drive belt	Dual belts
Edging depth	Up to 4"
Fuel capacity	2.8 ltr / 3 qts
Weight	31 kg / 69 lbs

1 YEARS WARRANTY*

Engines are warranted separately by manufacturer. *See website for terms & conditions.



1

2



PRO VAC DEBRIS VACUUM

Be it bulky bottles, crushed cans, leaves, pine needles or pea-sized gravel, the Little Wonder Pro Vac doesn't discriminate.

Our industry-leading impeller housing design funnels airflow and debris of all sizes into our top-loading, 74.5-gallon capacity bag without loss of suction. So you can collect more debris per bag and spend less time emptying it.

The Pro Vac is excellent for residential cleanup, industrial applications, commercial sites and carparks and is available in push.

MODELS AVAILABLE

PUSH

Model	LW5612-00-59 PRO VAC
Engine	B&S® Vanguard™
Engine displacement	6.5 hp
Fuel capacity	3.2 ltr / 3.4 qts
Bag design	Top filling, 26" diameter, single lever release
Bag capacity	8 bushel / 74.47 gallon (US)
Impeller	16 3/4" diameter, 5 blades, 1/4" thick
Transmission	N/A
Speed (f/r)	N/A
Drive wheels	12" pneumatic rear
Front wheels	10" pneumatic front
Weight	83 kg / 184 lbs
Dimensions (LxWxH)	62" x 29" x 40"
Nozzle type / width	Height adjustable, floating / 29"
Optional hose	12'

SELF PROPELLED

Model	LW5612-12-59 PRO VAC SP
Engine	Honda® GX270
Engine displacement	270 cc / 9 hp
Fuel capacity	6 ltr / 6.4 qts
Bag design	Top filling, 26" diameter, single lever release
Bag capacity	8 bushel / 74.47 gallon (US)
Impeller	16 3/4" diameter, 5 blades, 1/4" thick
Transmission	Hydrostatic, Hydro-Gear® T2
Speed (f/r)	0-4.2 mph / 0-1.8 mph
Drive wheels	13" turf tread rear
Front wheels	Heavy-duty casters standard front
Weight	127 kg / 280 lbs
Dimensions (LxWxH)	72" x 29" x 40"
Nozzle type / width	Height adjustable, floating / 29"
Optional hose	12'

KEY BENEFITS

- 1 Arched padded handle allows users of any height to find a comfortable operating position.
- 2 Top-loading, 74.5-gal. capacity bag—twice that of the competition — can handle the big loads.
- 3 Sleek design and rugged front swivel wheels make turning and following curved pavements and driveways effortless (standard on self propelled).
- 4 Nozzle height automatically adjusts—there's no need to stop the engine to change settings to avoid 'scalping' and 'digging in' on rough terrain.
- 5 Low 40" unit height allows for clear visibility of job sites and a better view of the front nozzle area.
- 6 Powered to perform with a Hydro-Gear® T2 transmission and 9HP Honda® GX270 engine (Pro Vac SP only).
- 7 Heavy-duty treaded rear drive wheels provide excellent traction on both concrete and grass (Pro Vac SP only).



5-blade impeller reverse inclined for superior suction.



Optional 12' Hose Kit Item LW600020



Dump valve allows for easy manoeuvrability when the engine is not engaged.

2 YEARS WARRANTY*

*2 years for domestic providing the machine is serviced by the supplying dealer.



KEY BENEFITS

- 1** Powerful 7- or 9- blade fan and steel impeller produces high airflow while the scrolled housing allows uninterrupted air intake. Even if a portion of the housing is covered with leaves and debris, airflow can still enter the impeller area and be forced out the discharge chute
- 2** Curved aerodynamic inlet draws air in smoothly for constant power and helps avoid clogging even if leaves are sucked in
- 3** Strong, ergonomic adjustable handle with anti-vibration grip for added comfort
- 4** Remote chute deflector control allows you to adjust the split-stream air deflector from the operator's position
- 5** Split-stream air deflector moves piles of leaves further and faster without blow-back. You'll only have to go over the area once
- 6** Integrated front/side discharge allows you to expel the air from the front of the unit or out the side without tools
- 7** Optional swivel wheel kit, easy to install, for 360° turning and control. Wheel can also lock into a straight position. Minimises wear and tear on tyres

5 YEARS WARRANTY*

Engines are warranted separately by manufacturer. *See website for terms & conditions.

OPTIMAX™ BLOWERS

Little Wonder Optimax™ maximum output blowers are perfect for moving leaves, debris and standing water or for any job that requires hurricane-force air.

All models feature a split-stream air deflector, which minimises "blow-back", and adjustable, ergonomic handles with anti-vibration grip for operator comfort.

Add a transport bracket for convenient tie-down and an industry-leading 5-year warranty, and you'll see why Optimax is the only blower you need.

MODELS AVAILABLE

Model	LB270H / LB270H-SP
Product No.	9270-02-59 / 9270-12-59
Variable speed forward	0 - 4.1 mph (SP only)
Variable speed reverse	0 - 2.5 mph (SP only)
Transmission	Variable speed belt-powered chain drive, open centre differential (SP only)
Engine	Honda® GX270
Displacement	270 cc
Fuel capacity	5.3 ltr / 1.4 gallon
Impeller (diameter, type)	17", 7-blade steel, reverse angle
Discharge chute area	25.8 sq. in.
Air volume	2260 cfm
Air speed*	143 mph
Integrated front / side discharge	yes
Air flow control	Remote
Front tyres	10" pneumatic tyres with tube
Rear tyres	
Handle	Ergonomic 2-position adjustable; anti-vibration grip
Housing	Continuously-welded steel; 1 piece engine keck
Dimensions (H x W x L)	43" x 28" x 58"
Weight	64 kg / 142 lbs / 91 kg / 202 lbs

Model	LB390H / LB390H-SP
Product No.	9390-02-59 / 9390-12-59
Variable speed forward	0 - 4.1 mph (SP only)
Variable speed reverse	0 - 2.5 mph (SP only)
Transmission	Variable speed belt-powered chain drive, open centre differential (SP only)
Engine	Honda® GX390
Displacement	389 cc
Fuel capacity	6.0 ltr / 1.6 gallon
Impeller (diameter, type)	17", 7-blade steel, reverse angle
Discharge chute area	25.8 sq. in.
Air volume	2530 cfm
Air speed*	160 mph
Integrated front / side discharge	yes
Air flow control	Remote
Front tyres	10" pneumatic tyres with tube
Rear tyres	
Handle	Ergonomic 2-position adjustable; anti-vibration grip
Housing	Continuously-welded steel; 1 piece engine keck
Dimensions (H x W x L)	43" x 28" x 58"
Weight	76 kg / 168 lbs / 103 kg / 228 lbs



Optional swivel wheel kit, easy to install, for 360° turning and control. Wheel can also lock into a straight position. Minimises wear and tear on tyres

9050-00-01

Chain/pulley system controlled from the handle position to adjust the split-stream air deflector



HYDRO BRUSHCUTTER

The Little Wonder Hydro Brushcutter navigates through weeds, heavy brush and overgrown vegetation with ease. Our tempered spring steel 26" blade cuts tall weeds, brush and saplings up to 2" thick.

Our welded steel frame design and engine positioning provide excellent balance regardless of the terrain.

And, unlike the competition, our hydrostatic transmission offers infinitely-variable, clutch-less speed selection—up to 4.2 mph forward and 1.7 mph reverse. So you can cut your own path at your own pace.

KEY BENEFITS

- 1 Ergonomic control system with forward / reverse and blade engagement levers positioned at handle grips
- 2 Solid rods connect the operator to the transmission, park brake and cutter blade clutch—no cables to break or adjust
- 3 Single belt pulley system
- 4 1" diameter mower blade spindle is supported by top and bottom sealed ball bearings inside a machined steel hub
- 5 Tempered spring steel 26" blade cuts tall weeds, brush and saplings up to 2" thick.
- 6 Adjustable 1.5" wide, .25" plate steel skid shoes provide excellent flotation over rough terrain
- 7 16" foam-filled no-flat, puncture-proof bar tread tyres for excellent traction and ground clearance on rough terrain
- 8 7-, 10- and 12-gauge welded steel engine base, cutting deck, rear frame and control handle construction holds up to the toughest conditions

Model	5126-22-59 HYDRO BRUSH CUTTER
Product description	Hydro BRC-26 Honda*
Engine	Honda® GXV390
Displacement	390cc
Fuel capacity	2.1 ltr / 2.2 qts
Transmission	Hydro-Gear® T2® Transaxle
Transmission type	Integrated hydrostatic pump / motor
Axle	.75" solid steel
Park brake	Standard
Differential lock	Open
Ground speed - forward	Infinitely-variable, 0-4.2 mph
Ground speed - reverse	Infinitely-variable, 0-1.7 mph
Cutting width	26" / 66 cm
Spindle / bearings	1" diameter / Dual sealed ball bearing
Overall width	30" (32" at the handles)
Cut height / capacity	3" - 5" / Saplings up to 2" diameter
Tyres	16" / 40.6 cm Puncture-proof, Bar tread, Foam-filled
Unit weight	183 kg / 405 lbs

2 YEARS WARRANTY*

Engines are warrantied separately by manufacturer. *See website for terms & conditions.



Speed limiter dial allows a firm grip on the control handles and speed selection while on the go