



INSTRUCTION MANUAL

SAW HORSE WITH CHAINSAW SUPPORT

MODEL NO: THSHWCS -- PRODUCT NO: 1938101001

EN - ORIGINAL INSTRUCTIONS

ASSEMBLY REQUIRED - MINIMUM TWO PERSONS

SAVE THESE INSTRUCTIONS

SPARES & SUPPORT: 01793 333212

FOR YOUR SAFETY

Please read & understand this manual, paying attention to the safety instructions, before use.

Incorrect use of the product could put the operator or machine in danger.

Whilst every effort has been made to ensure the accuracy of information contained in this manual, our policy of continuous improvement determines the right to make modifications without prior warning.

Images used are for illustration purposes only

Copyright Notice

Copyright © Handy Distribution

Permission is granted to reproduce this publication for personal & educational use only.

Commercial copying, redistribution, hiring or lending is prohibited.

No part of this publication may be stored in a retrieval system or transmitted in any other form or means without written permission from Handy Distribution.

In all cases this copyright notice must remain intact.

CONTENTS

SPECIFICATIONS

IMPORTANT INFORMATION

GENERAL SAFETY INSTRUCTIONS

SET UP & PREPARATION FOR OPERATION

ASSEMBLY

OPERATION

MAINTENANCE & STORAGE

TRANSPORT

TROUBLESHOOTING

PARTS DIAGRAM & LIST

WARRANTY

ASSEMBLY IS REQUIRED - TWO PERSONS

- This product requires assembly before use.
- See "Assembly" section for instructions.
- Because of the weight and/or size of the machine, it is recommended that another adult be present to assist with the assembly.
- Inspect all components closely upon receipt to make sure no items are missing or damaged.

IF YOU REQUIRE ASSISTANCE WITH REGARDS TO THE CONTENTS OR OPERATION OF THE MACHINE, PLEASE CONTACT US:

TEL: 01793 333212

EMAIL: CUSTOMERSERVICE@HANDYDISTRIBUTION.CO.UK

OPENING HOURS WEEKDAYS: FEB TO OCT 8:30AM - 5:30PM / NOV TO JAN 8:30AM - 5:00PM

SPECIFICATIONS

The manufacturer reserves the right to change the product specification and livery according to continued product improvements.

Model Number	THSHWCS	Product Number	1938101001
Assembled Dimensions	H-870 x W-710 x L-1095mm	Max. Bar Length	45cm (18")
Max. Log Diameter	25cm	Max. Weight Capacity	120kg
Max. Long Length	1.8m	Material	Steel
Weight	G.W 11.55kg - N.W 9.5kg		

IMPORTANT INFORMATION

INTENDED USAGE

The Saw Horse with Chainsaw Support is designed for use with domestic Chainsaws in private gardens with a working chain-bar length of no more than 18 inches (45cm). It is the user's responsibility to ensure that the THSHWCS is compatible with your chosen chainsaw. Check with chainsaw manufacturer for compatibility. For use in private gardens, but not in public facilities, parks or sports grounds and not for agricultural or forestry use. Generally acknowledged accident prevention regulations and enclosed safety instructions must be observed. Only perform work described in these instructions for use, any other use is incorrect. The manufacturer will not assume responsibility for damage resulting from such use.



WARNING!

Read this instruction manual carefully before operation. Make sure that you are familiar with the controls and properly operate the machine. Following these instructions can reduce the risk of personal injury.

IF NOT USED PROPERLY THIS MACHINE CAN BE DANGEROUS!

This machine can cause serious injury to the operator and others, the warning and safety instructions must be followed to ensure reasonable safety and efficiency in using this product. The operator is responsible for following the warning and safety instructions in this manual and on the machine. Never use the product unless the components are correctly positioned and operational.

TRAINING

Read the instructions carefully: Be familiar with the controls and the proper use of the equipment. Never allow children or people unfamiliar with these instructions to use the product. Local regulations can restrict the age of the operator. Keep in mind that the operator or user is responsible for accidents or hazards involving the machine that occur to other people or their property.

GENERAL SAFETY INSTRUCTIONS

It is important that you read and understand the owner's manual and labels affixed to the machine. Learn its application and limitations as well as the specific potential hazards. Retain these instructions for future reference. The operator is responsible for following the warnings & instructions in this manual and on the product.

	Read & understand the instruction manuals for the table and log splitter used with it before operating. Failure to follow instructions could result in death or serious injury.		DANGER Risk of Slicing. Keep hands out of the way of all moving parts of the log splitter.
	Always non-skid safety shoes, to protect against falling logs.		Keep bystanders away
	Wear protective gloves to protect your hands		Always wear eye protection and stout shoes while operating the machine
	Keep guards in place and in working order. Replace damaged, missing or failed parts before using it.		Safety alert symbol. Used to alert you to potential personal injury hazards. Obey all safety messages that follow this symbol to avoid possible injury.
	Indicates an imminently hazardous situation which, if not avoided, will result in serious injury.		Indicates a potentially hazardous situation which, if not avoided, could result in serious injury
	Indicates a potentially hazardous situation which, if not avoided, may result in minor or moderate injury.	CAUTION	Used without the safety alert symbol indicates a potentially hazardous situation which, if not avoided, may result in property damage.

STAY ALERT

Do not use whilst under the influence of drugs, alcohol, or any medication that could affect your ability to use it properly. Do not use this machine when you are tired or distracted from the job at hand. Always be aware of what you are doing. Use common sense.

SMALL COMPONENTS

Contains small components that could be a choking hazard if swallowed. Keep these items away from children.

EVENLY DISTRIBUTE YOUR LOAD

Always distribute load evenly over surface of the table, do not exceed maximum weight limit of 120kg.

USERS, BYSTANDERS AND CHILDREN

Do not allow anyone to sit, stand or lay on the saw horse. Do not allow children to play on, stand upon or climb on the saw horse. Never allow children or people unfamiliar with these instructions to use the saw horse. Local regulations can restrict the age of the operator. Keep unauthorised persons a safe distance away from the machine (a minimum of 10 metres) when in use with a chainsaw. If approached, stop the chainsaw immediately.

AVOID DANGEROUS CONDITIONS

Work in daylight or in good artificial light; always be sure of your footing. Never operate on uneven surfaces and use extreme caution when reversing or pulling the machine towards you; do not put hands or feet near or under rotating or moving parts.

INSPECT YOUR MACHINE

Check all screws, bolts, nuts, and washers for tightness before each use, especially those securing. Vibration during use, may cause these to loosen. Form a habit of checking to see that all other tools/equipment are removed from the working area before operating. Replace damaged, missing or failed parts before using. Warning labels carry important information. Replace any missing or damaged warning labels.

DRESS PROPERLY

Be careful of loose clothing and other accessories (watches, necklaces etc.) which can be caught in moving parts. Long trousers are advisable. Always wear substantial non slip protective footwear when operating. Never operate barefoot or when wearing sandals. Wear a face or dust mask if the operation is dusty. Wear protective hair covering to contain long hair, preventing it from getting caught in machinery. Eye & ear protection is also a requirement, along with protective gloves for your hands.

DO NOT OVERREACH

Serious injury could occur if the machine is tipped or if moving parts are unintentionally contacted. Do not store anything above or near the machine, where anyone might stand on the machine to reach them.

DO NOT FORCE TOOL

Always work within the rated capacity. Do not use machine for a purpose for which it was not intended.

INSPECT

Before using, always visually inspect to see that the machine is not worn or damaged. Replace worn or damaged elements and bolts in sets, to preserve balance.

MAINTAIN YOUR MACHINE WITH CARE

Clean immediately after use. Keep clean to ensure it operates to its full and safest performance. When maintaining, only the manufacturer's original replacement parts should be used. The use of non-original manufacturer parts may invalidate your warranty.

PROTECT THE ENVIRONMENT

Take left over materials to an authorised collection point or follow the stipulations in the country where the machine is used. Do not discharge into drains, soil or water.

STORE IDLE EQUIPMENT

When not in use, the machine should be stored in a dry location. Keep the machine away from children and others not qualified to use it. Keep away from direct sunlight.

SET UP & PREPARATION FOR OPERATION

This product must be assembled correctly before use. Carefully remove the components and any accessories from the carton. Inspect carefully to make sure there are no breakages or missing items during shipping. Do not discard the packing material & carton until you have carefully inspected & satisfactorily operated the product.

IF YOU REQUIRE ASSISTANCE WITH REGARDS TO THE CONTENTS OR OPERATION OF THE MACHINE, PLEASE CONTACT US:

TEL: 01793 333212

EMAIL: CUSTOMERSERVICE@HANDYDISTRIBUTION.CO.UK

OPENING HOURS WEEKDAYS: FEB TO OCT 8:30AM - 5:30PM / NOV TO JAN 8:30AM - 5:00PM



1. 8x 8x30mm Bolt	2. 8x 8x35mm Bolt	3. 3x 8x45mm Bolt	4. 1x 8x70mm Bolt
5. 1x 10x20mm Bolt	6. 6x 8x12mm Bolt	7. 1x 3mm R-clip	8. Leg Plug
9. 17x M8 Lock Nut	10. 1x 20x30mm Eye Bolt	11. 1x 10x20mm Eye Bolt	12. 2x 16mm End Caps
13. 1x 8mm Washer			



WARNING

If any parts are damaged or missing do not operate this product until the parts are replaced. Failure to heed this warning could result in serious personal injury.

Do not attempt to modify this product or create accessories not recommended for use with this product. Any such alteration or modification is misuse and could result in a hazardous condition leading to possible serious personal injury.

Read and follow all instructions for assembly and operation. Failure to correctly assemble this equipment could result in serious injury to the user or bystanders, or cause equipment damage.


ASSEMBLY



DANGER

It is recommended that safety gloves are used during the assembly of this item.

SCHEMATIC DRAWING

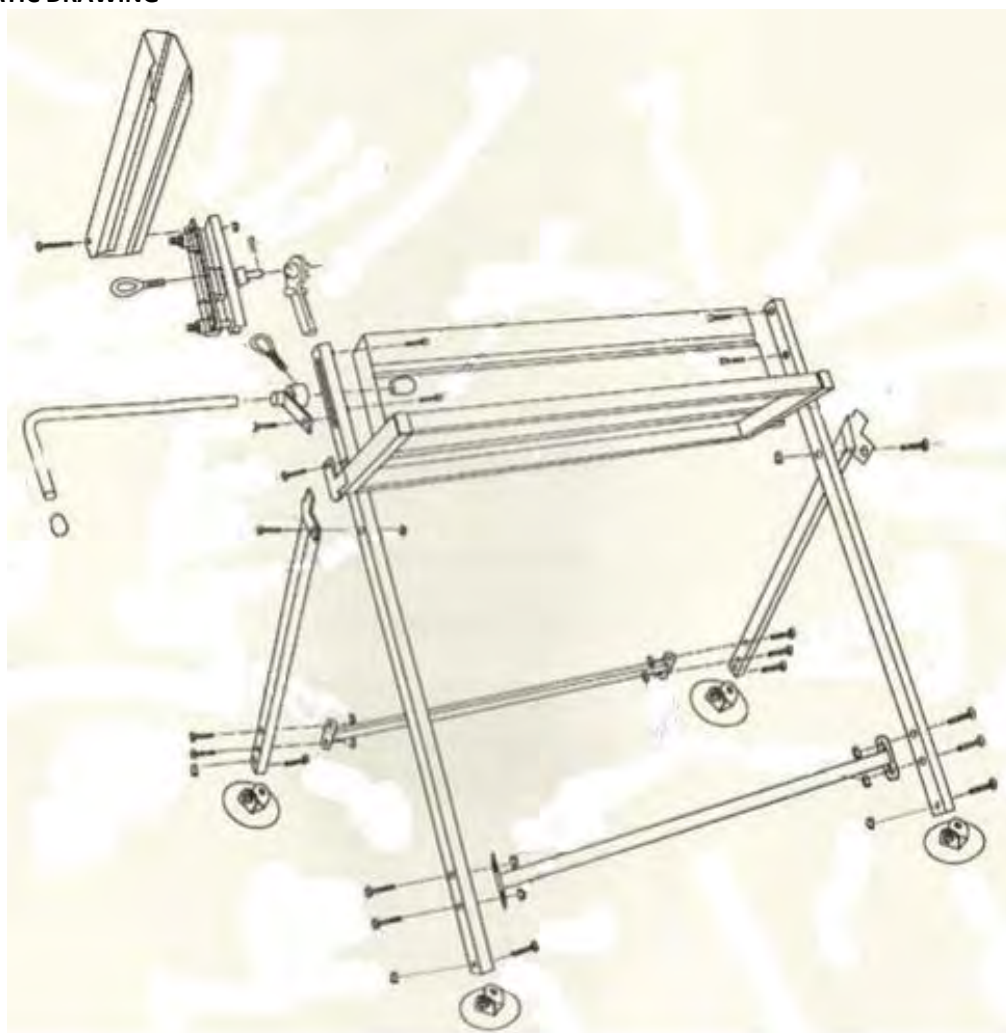


The Saw Horse is supplied with Nylock Nuts. They are designed with a blue nylon collar, which has a slightly smaller diameter to the bolt. The collar deforms elastically over the threads of the screw, but threads are not cut into the nylon. The nylon collar locks the nut by applying a compressive force against the bolt. This therefore requires increased pressure when assembling.

All numbers listed in brackets () throughout the below assembly steps are the taken from the parts list, which is located towards the back of this instruction manual.

Attach the feet to the four (2x short, 2x long) legs, using 8x35mm Bolts (2) & M8 Lock Nuts (9).




Attach the Leg Brace (22) to the inside of the Long Legs, ensuring the adjustment slot is located on the outside of the Long Legs (18 & 23) using 8x30mm Bolt (1) & M8 Nut (9). Repeat the same action to the Short Legs (20 & 24).

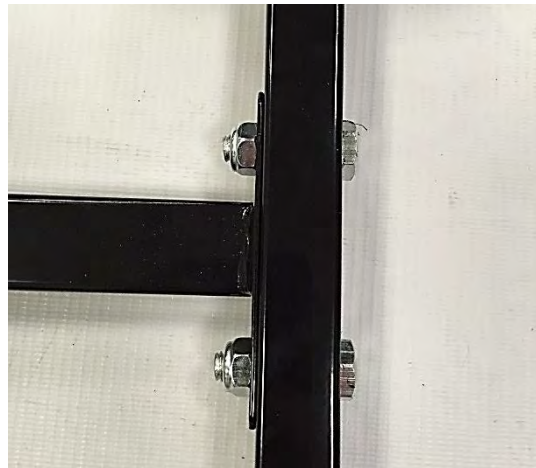

Attach the two Short Legs to the two Long Legs bottom fixing hole, ensuring the L-shape at the top of the Short Leg is positioned on the outside of the Long Leg. Secure using 8x35mm Bolt (2) & M8 Nut (9).



Secure Bed 1 (17) to the inside of the two Long Legs, using six 8x12mm Hex Bolts (6) using an Allen Key, securing from the underside of the Bed, into the welded nuts on the Long Legs.

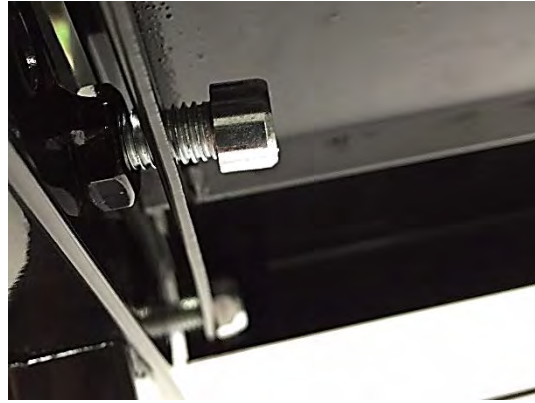

Secure Bed 2 (19) to the Long Leg, using 8x45mm Bolt (3) and M8 Nut (9), into the upper hole of the two located in the leg. The L-shape on the Bed, should sit on the outside of the leg.




Position the Pivot Clamp Holder (16) into the right-hand Long Leg and secure with the Rod/Handle Eyelet (26) using 10x20mm Bolt (5) & M8 Washer.



Place the long section of the Measuring Rod (25) through the Handle Eyelet and secure with the 10x20mm Eyelet Bolt (11).




Place the Pivot Clamp (15) onto the Pivot Clamp Holder (16), ensuring the eye bolt is located on the outside of the table. Secure with the 3mm R-Clip (7). Insert 20x30mm Eyelet Bolt (10) into centre threaded hole, located on outside of Pivot Clamp (15).

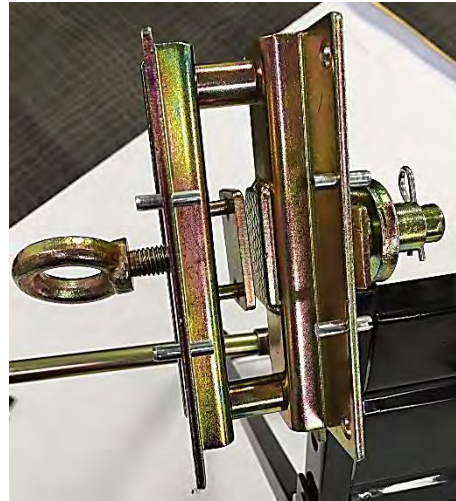

Carefully lower the chainsaw bar into position between the two solid blocks on the pivot clamp and ensure you have a 2cm gap between the body of the chainsaw and the clamp.

Ensure the bar is approximately 90 degrees to the clamp and well clear of the chain before tightening the securing eye bolt. To tighten, use the supplied metal tube/bar and place within the eye bolt and rotate to tighten.

Once tightened, test the arc of travel to make sure that the chain bar does not touch any part of the saw horse.

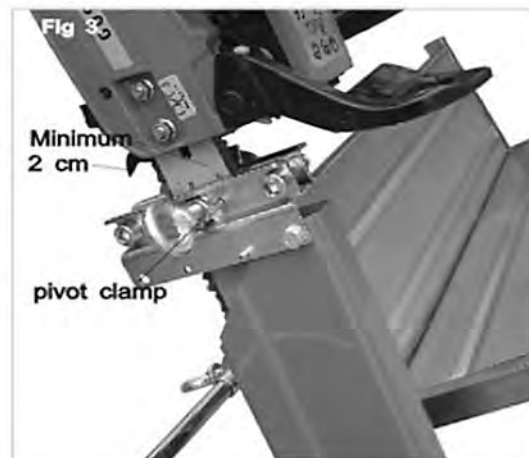

Secure the Saw Guard (14) to the Pivot Clamp, using 8x70mm Bolt & M8 Nut (9). Ensure there is sufficient clearance between the guard and saw chain.



Insert the Black Plug (8) Into the left Long Leg



Place the two End Caps (12) onto both ends of the Measuring Rod.



OPERATION



DANGER

The product must only be put into operation if no defects are found. It is crucial that any defective parts are replaced before the product is used again.



WARNING

Before using the log splitter table, review the instructions below and safety information. Failure to follow these instructions may result in property damage or injury to the operator or bystanders.

Check the safety equipment and the safe condition of the product:

- Check all parts to make sure that they fit tightly.
- Check whether there are any visible defects: broken parts, cracks, etc.
- Never use the product on slopes. Always work on level ground, ensuring you have a stable footing.

1. Place the wood on the log table, pushing the end to be cut against the measuring rod.
2. Standing behind the saw horse and chainsaw, hold the wood down firmly with your left hand.
3. Keep your hand well clear of the cutting edge of the chainsaw.
4. Arc the chainsaw with your right hand down towards the wood and continue to arc until the wood is cut through.
5. Repeat steps 1 to 4 for further cutting cycles

PLEASE REMEMBER.....

- The log table of the saw horse is designed for lengths of wood with a maximum length of 1.8 metres and a maximum diameter of 25cm.
- The maximum permissible weight is 120kg.
- The saw horse chain guard is designed for chainsaws with a cutting bar not longer than 45cm (18"). A chainsaw with a cutting bar longer than 45cm (18"), which protrudes beyond the guard is not recommended and potentially dangerous.
- The pivot clamp and guard must be detached from the chainsaw, when used away from the saw horse.
- The saw horse must be used on flat surfaces only.



When using a chainsaw with this saw horse, it is essential that all safety codes of practice supplied by chainsaw manufacturer and Health & Safety Executive are fully followed.

MAINTENANCE & STORAGE

MAINTENANCE

The pivot clamp and support must be kept well lubricated with multi-purpose grease.
Ensure all nuts and bolts are checked prior to each use.



WARNING

Make sure that unauthorised persons do not have access to the device!

STORAGE

Store the machine in a dry place.
Store away from direct sunlight
Do not store anything above or near the machine, where anyone might stand on the machine to reach them.
Keep the machine away from children and others not qualified to use it.

CLEANING

Careful handling & regular cleaning ensure that the device will remain functional for a long time.
Brush off coarse dirt.
Wipe down the device with a slightly damp cloth.

TRANSPORT

Secure the device against slipping.
When shipping, use the original packaging if possible.

TROUBLESHOOTING



WARNING

If the product does not perform properly, makes unusual sounds, or any other irregularity or malfunction occurs, do not attempt to repair the product by yourself. Please contact customer services or your local authorised service dealer for advice.


IF YOU REQUIRE ASSISTANCE WITH REGARDS TO THE CONTENTS OR OPERATION OF THE MACHINE, PLEASE CONTACT US:

TEL: 01793 333212











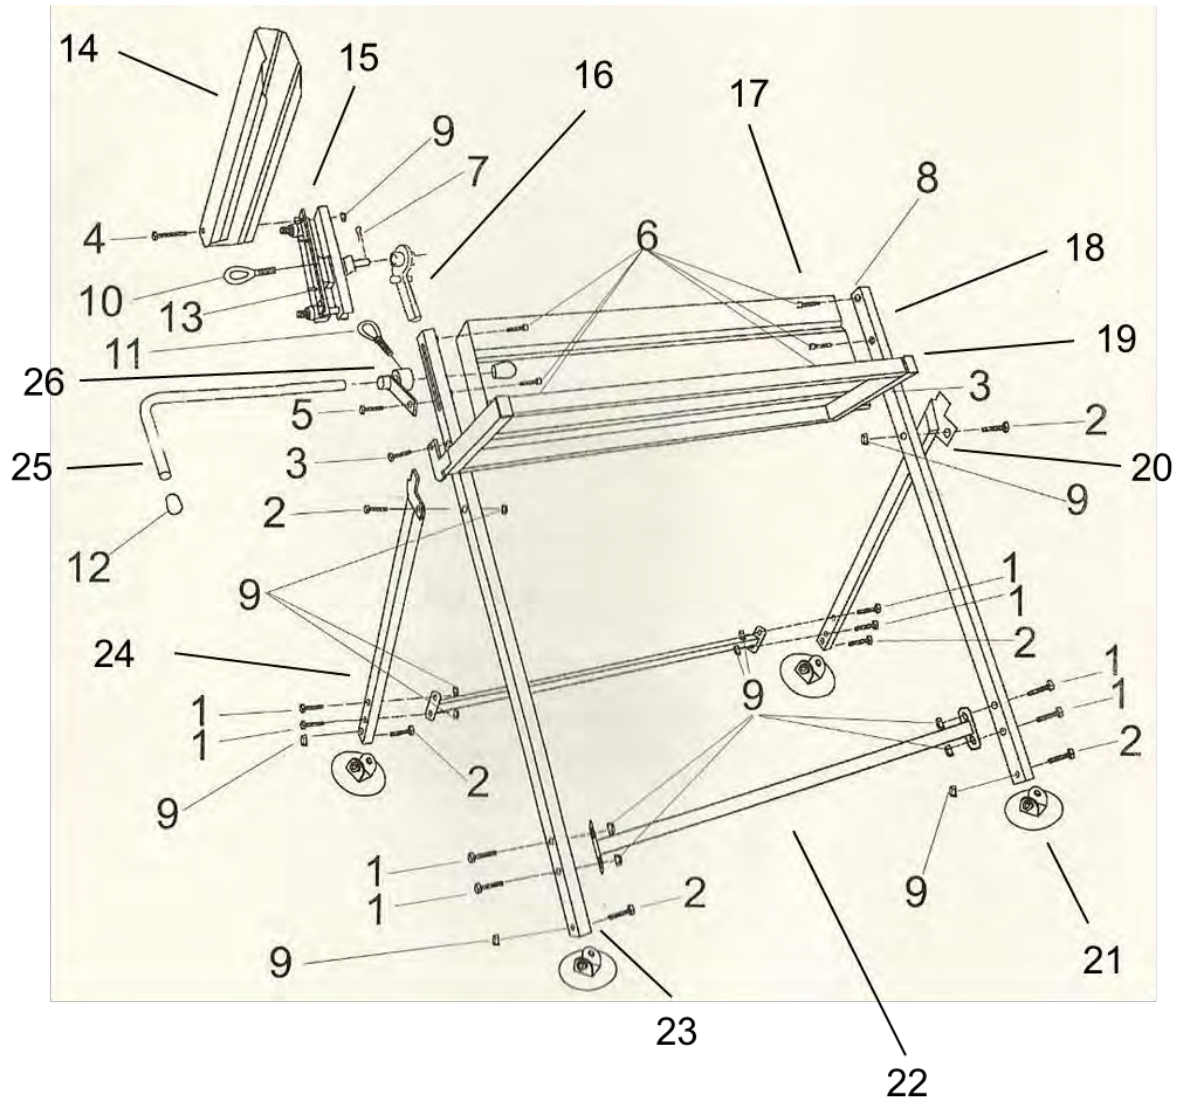


EMAIL: CUSTOMERSERVICE@HANDYDISTRIBUTION.CO.UK

OPENING HOURS WEEKDAYS: FEB TO OCT 8:30AM - 5:30PM / NOV TO JAN 8:30AM - 5:00PM

PARTS DIAGRAM – THSHWCS (1938101001)



PARTS LIST – THSHWCS (1938101001)

1		8x30mm	8x
2		8x35mm	6x
3		8x45mm	2x
4		8x70mm	1x
5		10x20mm	1x
6		8x12mm	6x
7		3mm	1x
8			1x
9		m8	17x
10		20x30mm	1x
11		10x20mm	1x
12		∅ 16mm	2x
13		5x10mm	2x

NOTE:

Number 13 are fitted to the Pivot Clamp at the factory

No.	Handy No.	Part	Qty
14	TH191-14	Saw Guard	1
15	TH191-15	Saw Holder	1
16	TH191-16	Holder Eyelet	1
17	TH191-17	Bed 1	1
18	TH191-18	Long Far Leg	1
19	TH191-19	Bed 2	1
20	TH191-20	Short Far Leg	1
21	TH191-21	Foot	4
22	TH191-22	Leg Brace	2
23	TH191-23	Long Leg with Holder Slot	1
24	TH191-24	Short Leg on Holder End	1
25	TH191-25	Handle	1
26	TH191-26	Rod/Handle Eyelet	1

GJ HANDY & CO LTD USER WARRANTY POLICY

VERSION 8 01-2020

Users Statement of Warranty

Each new machine is warranted against defective material or assembly of material under normal usage. The warranty applies to the original purchaser and covers faulty parts and the labour involved in replacing and repairing those parts, which are of original manufacture.

Period of Warranty

The Handy (Petrol & Electric only), Webb (excludes Dynamic, Heritage, Legacy), Sanli Engine

- a) 2 years from the original date of sale to the first domestic user.
- b) 90 days from the original date of sale to the professional/commercial user.
- c) 90 days from the original date of sale when used for hire.
- d) A reduced warranty period of 90 days applies to those items which are subject to normal wear and tear (e.g. but not limited to wheels, tyres, cutter bars, cylinders, cutting blades, blade boss, belts, cables, nylon line & spool, collection bags, spark plugs).
- e) Engines are supplied with a separate warranty to the machine. The engine manufacturers warranty statement which will be supplied within the engine instruction manual. All enquiries and warranty repairs should be discussed with the engine manufacturer or approved warranty repair dealer.
- f) 90 days from the original date of purchase for Replacement Spare Parts (unless normal wear & tear component, which are covered for 30 days).
- g) All machines' must be serviced within the first 12 months from the original date of purchase to comply with the warranty (if applicable), failure to do so will invalidate the 2nd year of the warranty.

Webb Dynamic, Heritage & Legacy, Handy (All non-Petrol & Electric), Mowerland, Q-Garden

- a) 1 year from the original date of sale to the first domestic user.
- b) 90 days from the original date of sale to the professional/commercial user.
- c) 90 days from the original date of sale when used for hire.
- d) A reduced warranty period of 90 days applies to those items which are subject to normal wear and tear (e.g. but not limited to wheels, tyres, cutter bars, cylinders, cutting blades, blade boss, belts, cables, nylon line & spool, collection bags, spark plugs).
- e) Engines are supplied with a separate warranty to the machine. The engine manufacturers warranty statement which will be supplied within the engine instruction manual. All enquiries and warranty repairs should be discussed with the engine manufacturer or approved warranty repair dealer.
- f) 90 days from the original date of purchase for Replacement Spare Parts (unless normal wear & tear component, which are covered for 30 days).

All warranty repairs must be undertaken by an authorised service dealer. These dealers have been accredited by GJ Handy & Co Ltd and agree to only use genuine parts and follow our repair procedures.

Not covered by this warranty

- a) The warranty policy does not cover any depreciation or damages caused by ordinary wear, rusting or corrosion, lack of correct maintenance or operation, misuse, abuse, lack of transportation or accident.
- b) The warranty policy does not cover any costs necessary for the standard periodic maintenance services instructed by the operator's manual, or service parts replacement which would include oil, filters, tyres, belts, brake linings, fuses, blades, seals and other service parts unless it can be proven that the item has evidence of faulty manufacture.
- c) The warranty policy will not cover failure or damage caused as a result of parts or accessories being modified without the written approval of GJ Handy & Co Ltd.
- d) The warranty policy will not cover the unit if non-genuine parts have been fitted and as a result damage has occurred to the unit.
- e) The warranty policy is non-transferable and is only applicable to the original purchaser.

Disclaimer

- a) This warranty is only a remedy for defect of products. GJ Handy & Co Ltd will never warranty in terms of the merchantability or the fitness for a particular purpose.
- b) No person is authorised to make any warranties, representations or promises, expressed or implied, on behalf of GJ Handy & Co Ltd, or to modify the terms conditions or limitation of this warranty policy in any way.
- c) Neither GJ Handy & Co Ltd nor any company affiliated with GJ Handy & Co Ltd shall be liable in any event or manner whatsoever for incidental or consequential damages or injuries, including, but not limited to, loss of crops, loss of profit, out of pocket expenses or profits, rental of substitute equipment or other commercial losses.

General

- a) Most warrantable failures show up within the first few weeks of use. These failures are usually straightforward and warranty assessment is relatively easy.
- b) Failures relating to cutter decks and belts need careful investigation, as the cause may not always be straightforward. Look for damage to blades and pulleys especially when the cutter belt or blade boss have snapped or cracked as this could be due to impact damage.
- c) Customers should always refer to the operator/instruction manual when any disputed problem arises, you will find most areas covered within the manual.

**For spares or support of your handy product,
please contact us:**

Tel: 01793 333212

Email: customerservice@handydistribution.co.uk

Opening Hours Weekdays:

Feb To Oct 8:30am - 5:30pm / Nov To Jan 8:30am - 5:00pm

(CLOSED BANK HOLIDAYS)

To see our range of garden machinery & equipment visit:

www.thehandy.co.uk

Making gardening easier & affordable since 1938

Distributed by Handy Distribution, Murdock Road, Dorcan, Swindon, SN3 5HY